



SOCE051-60CM



Installation Instruction

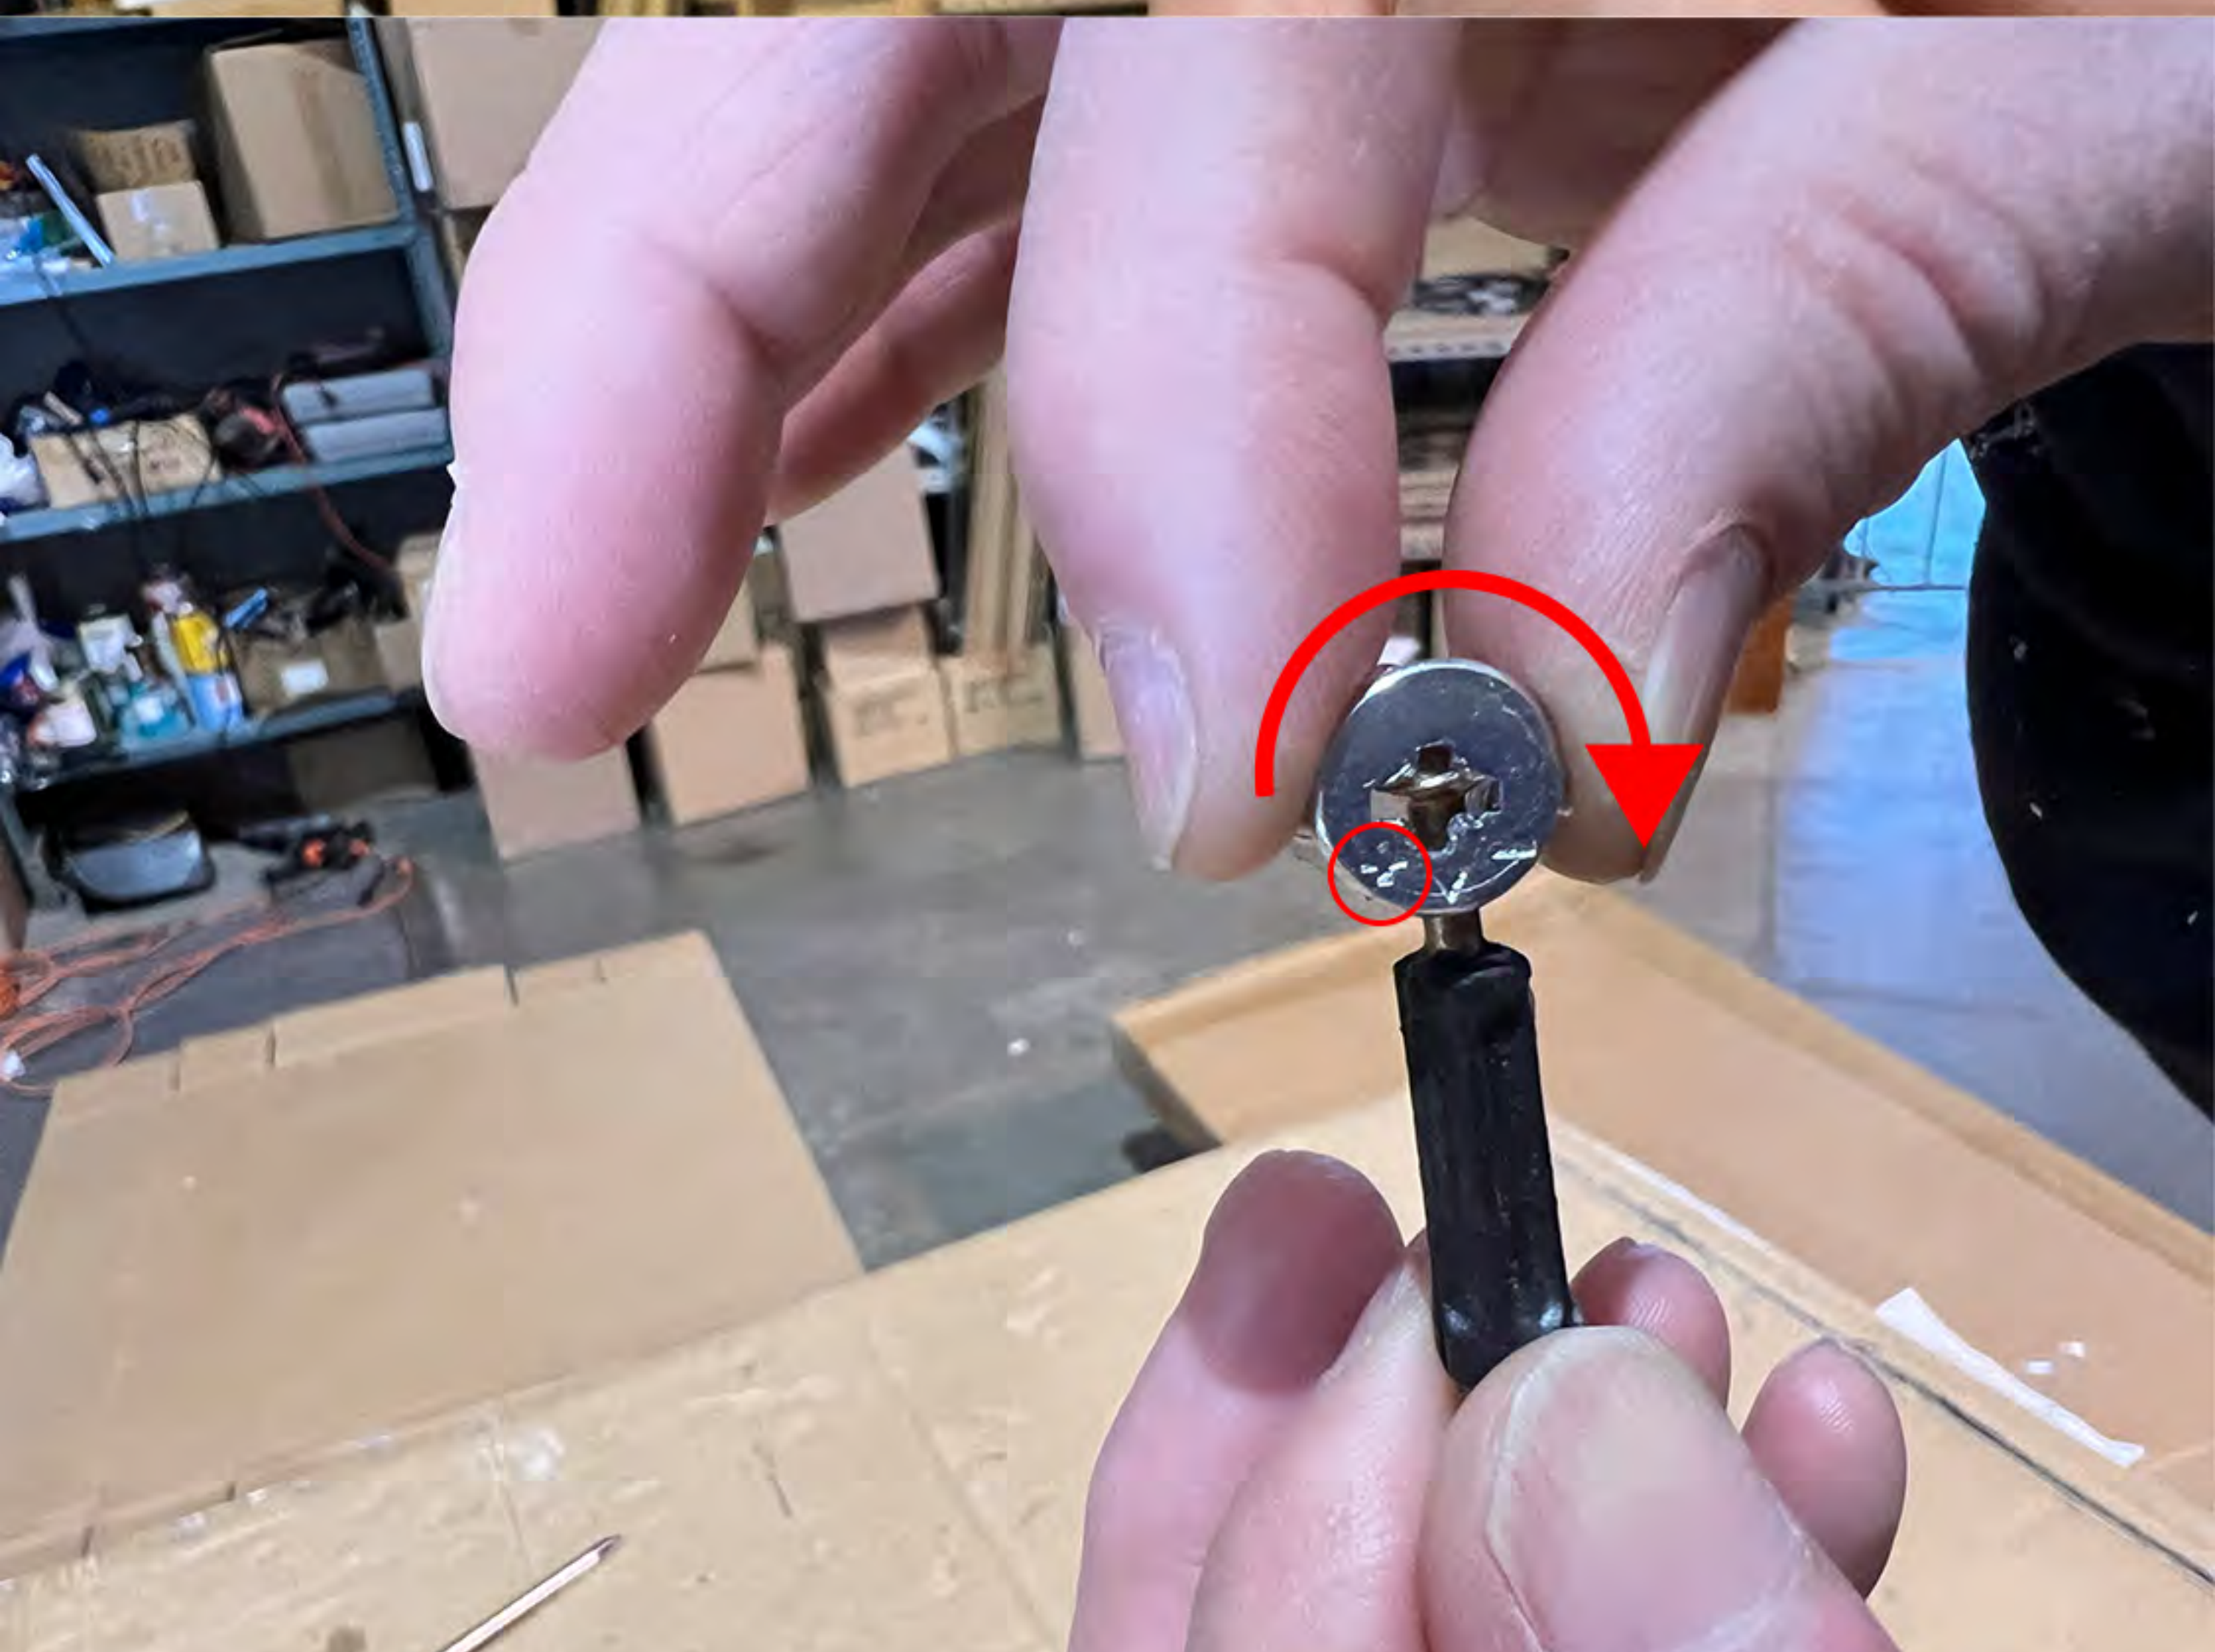

Instructions for using eccentric bolts:


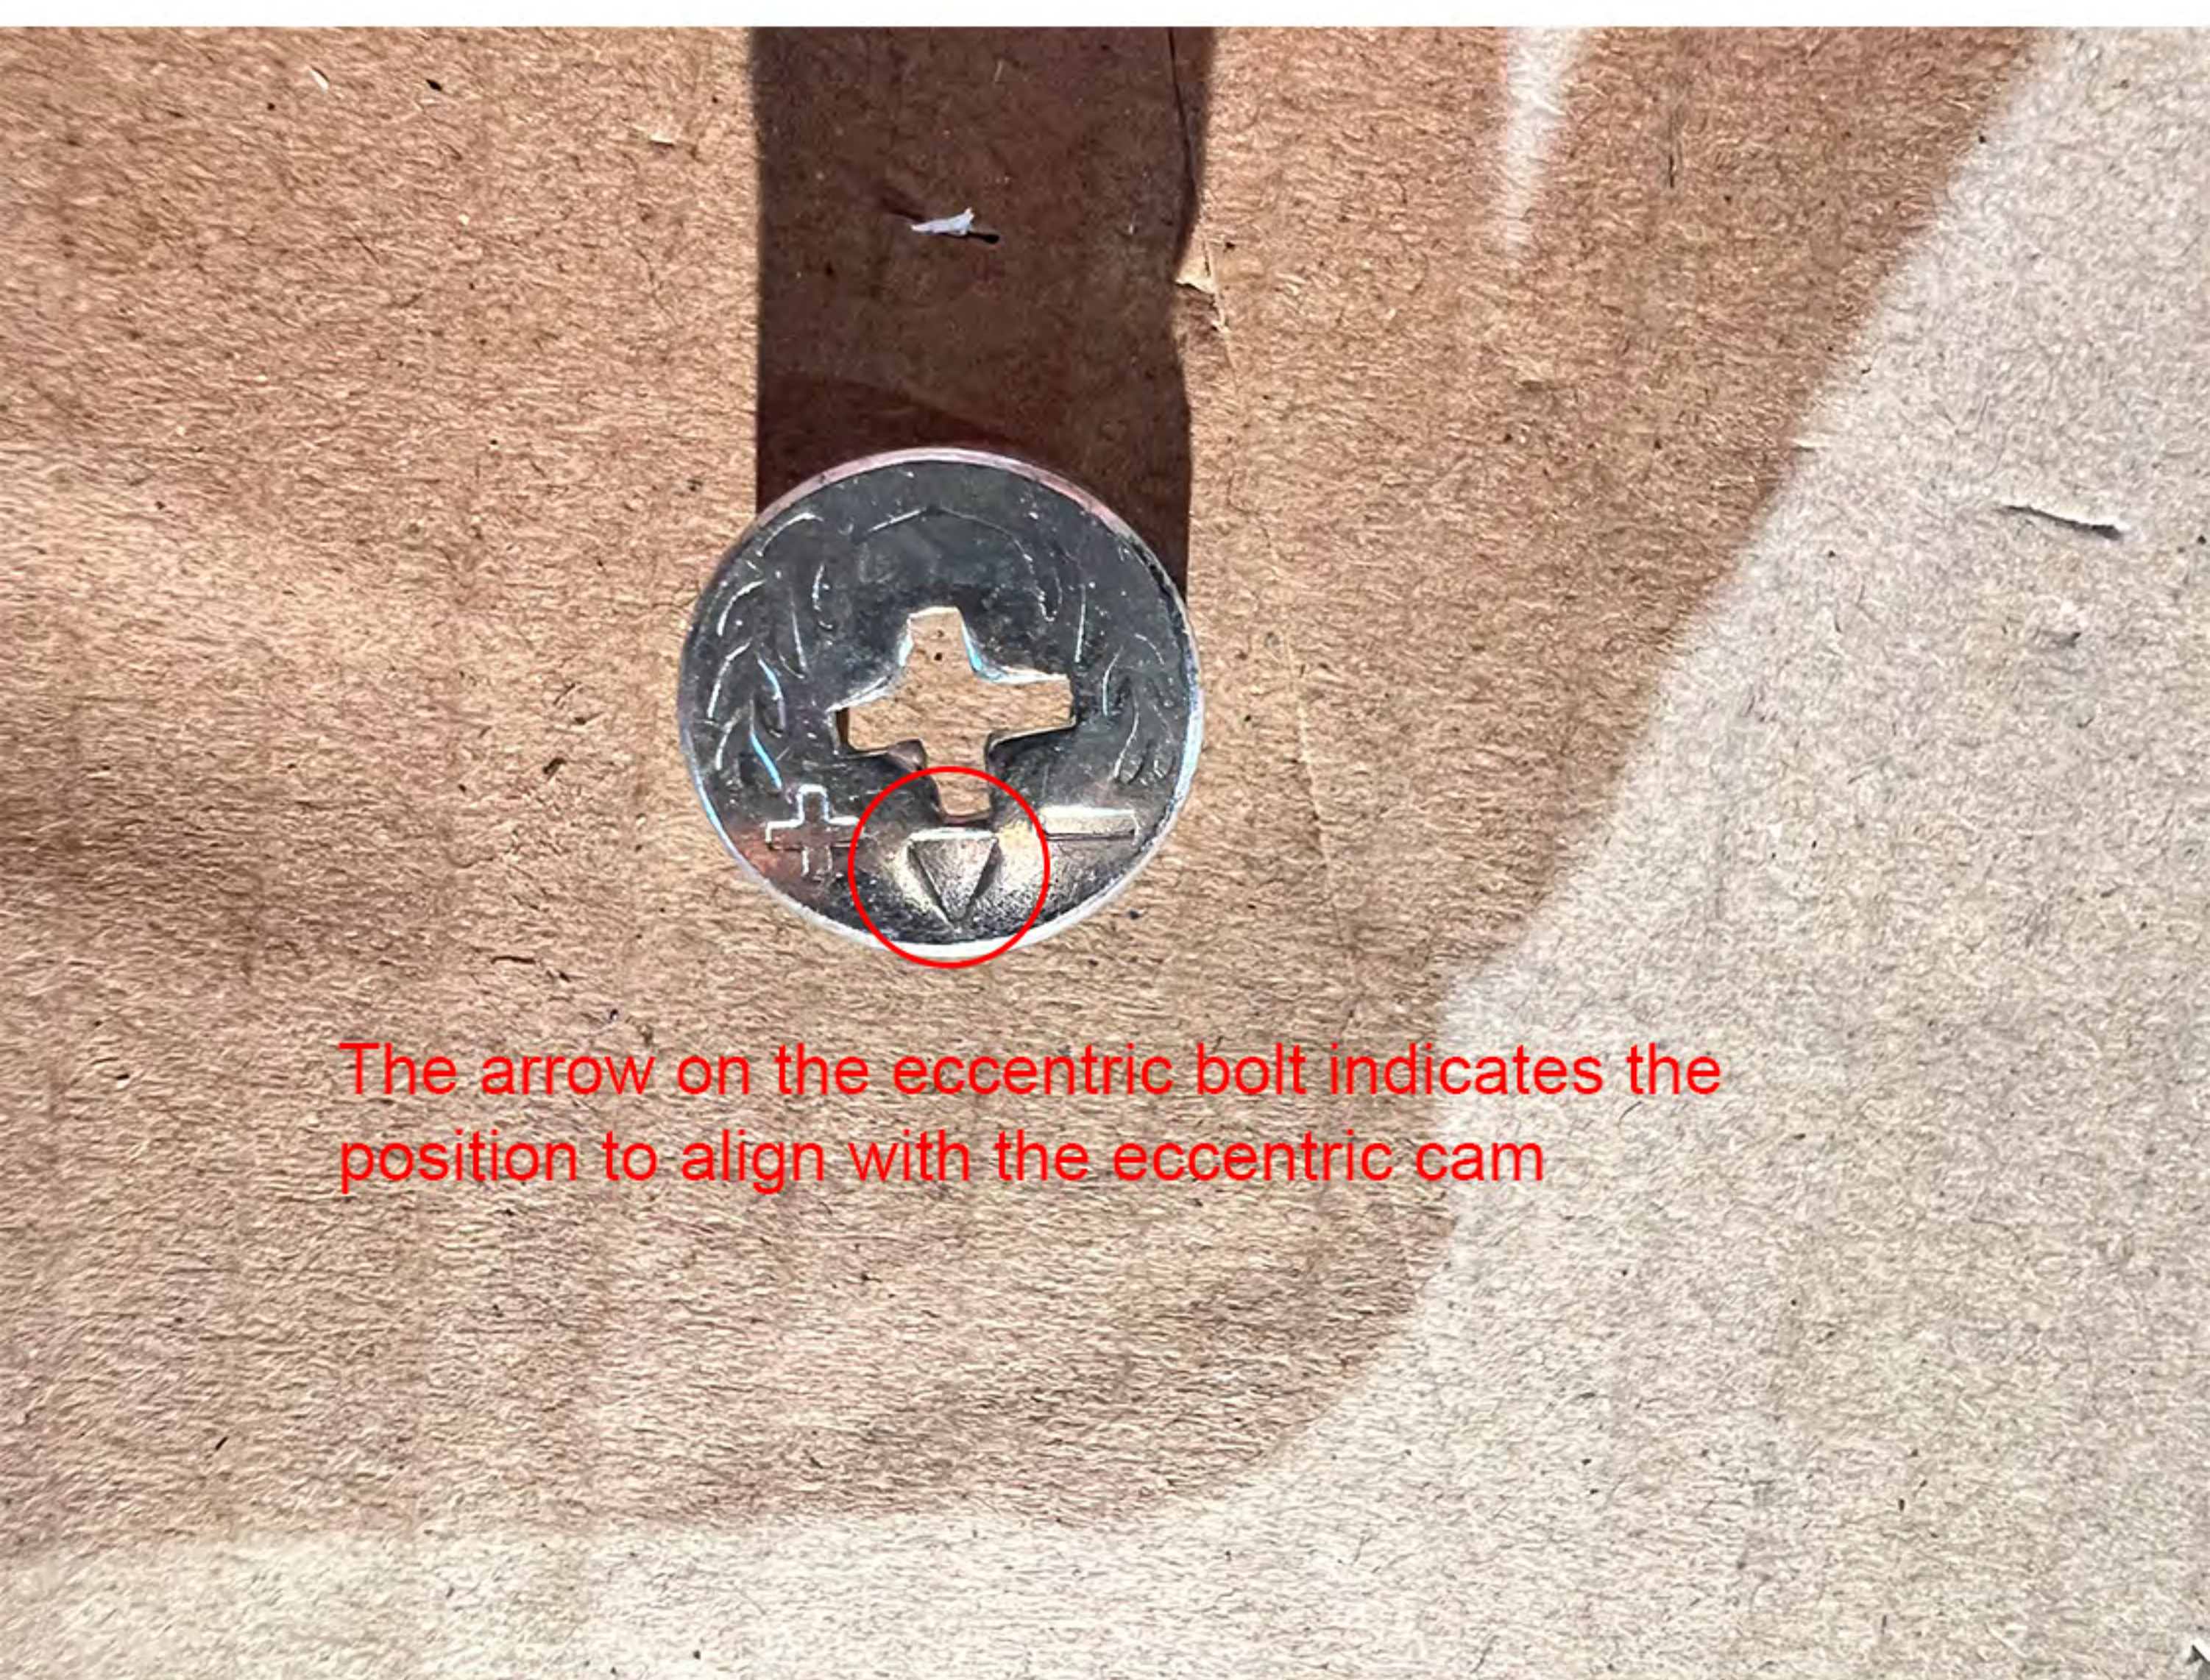


Example

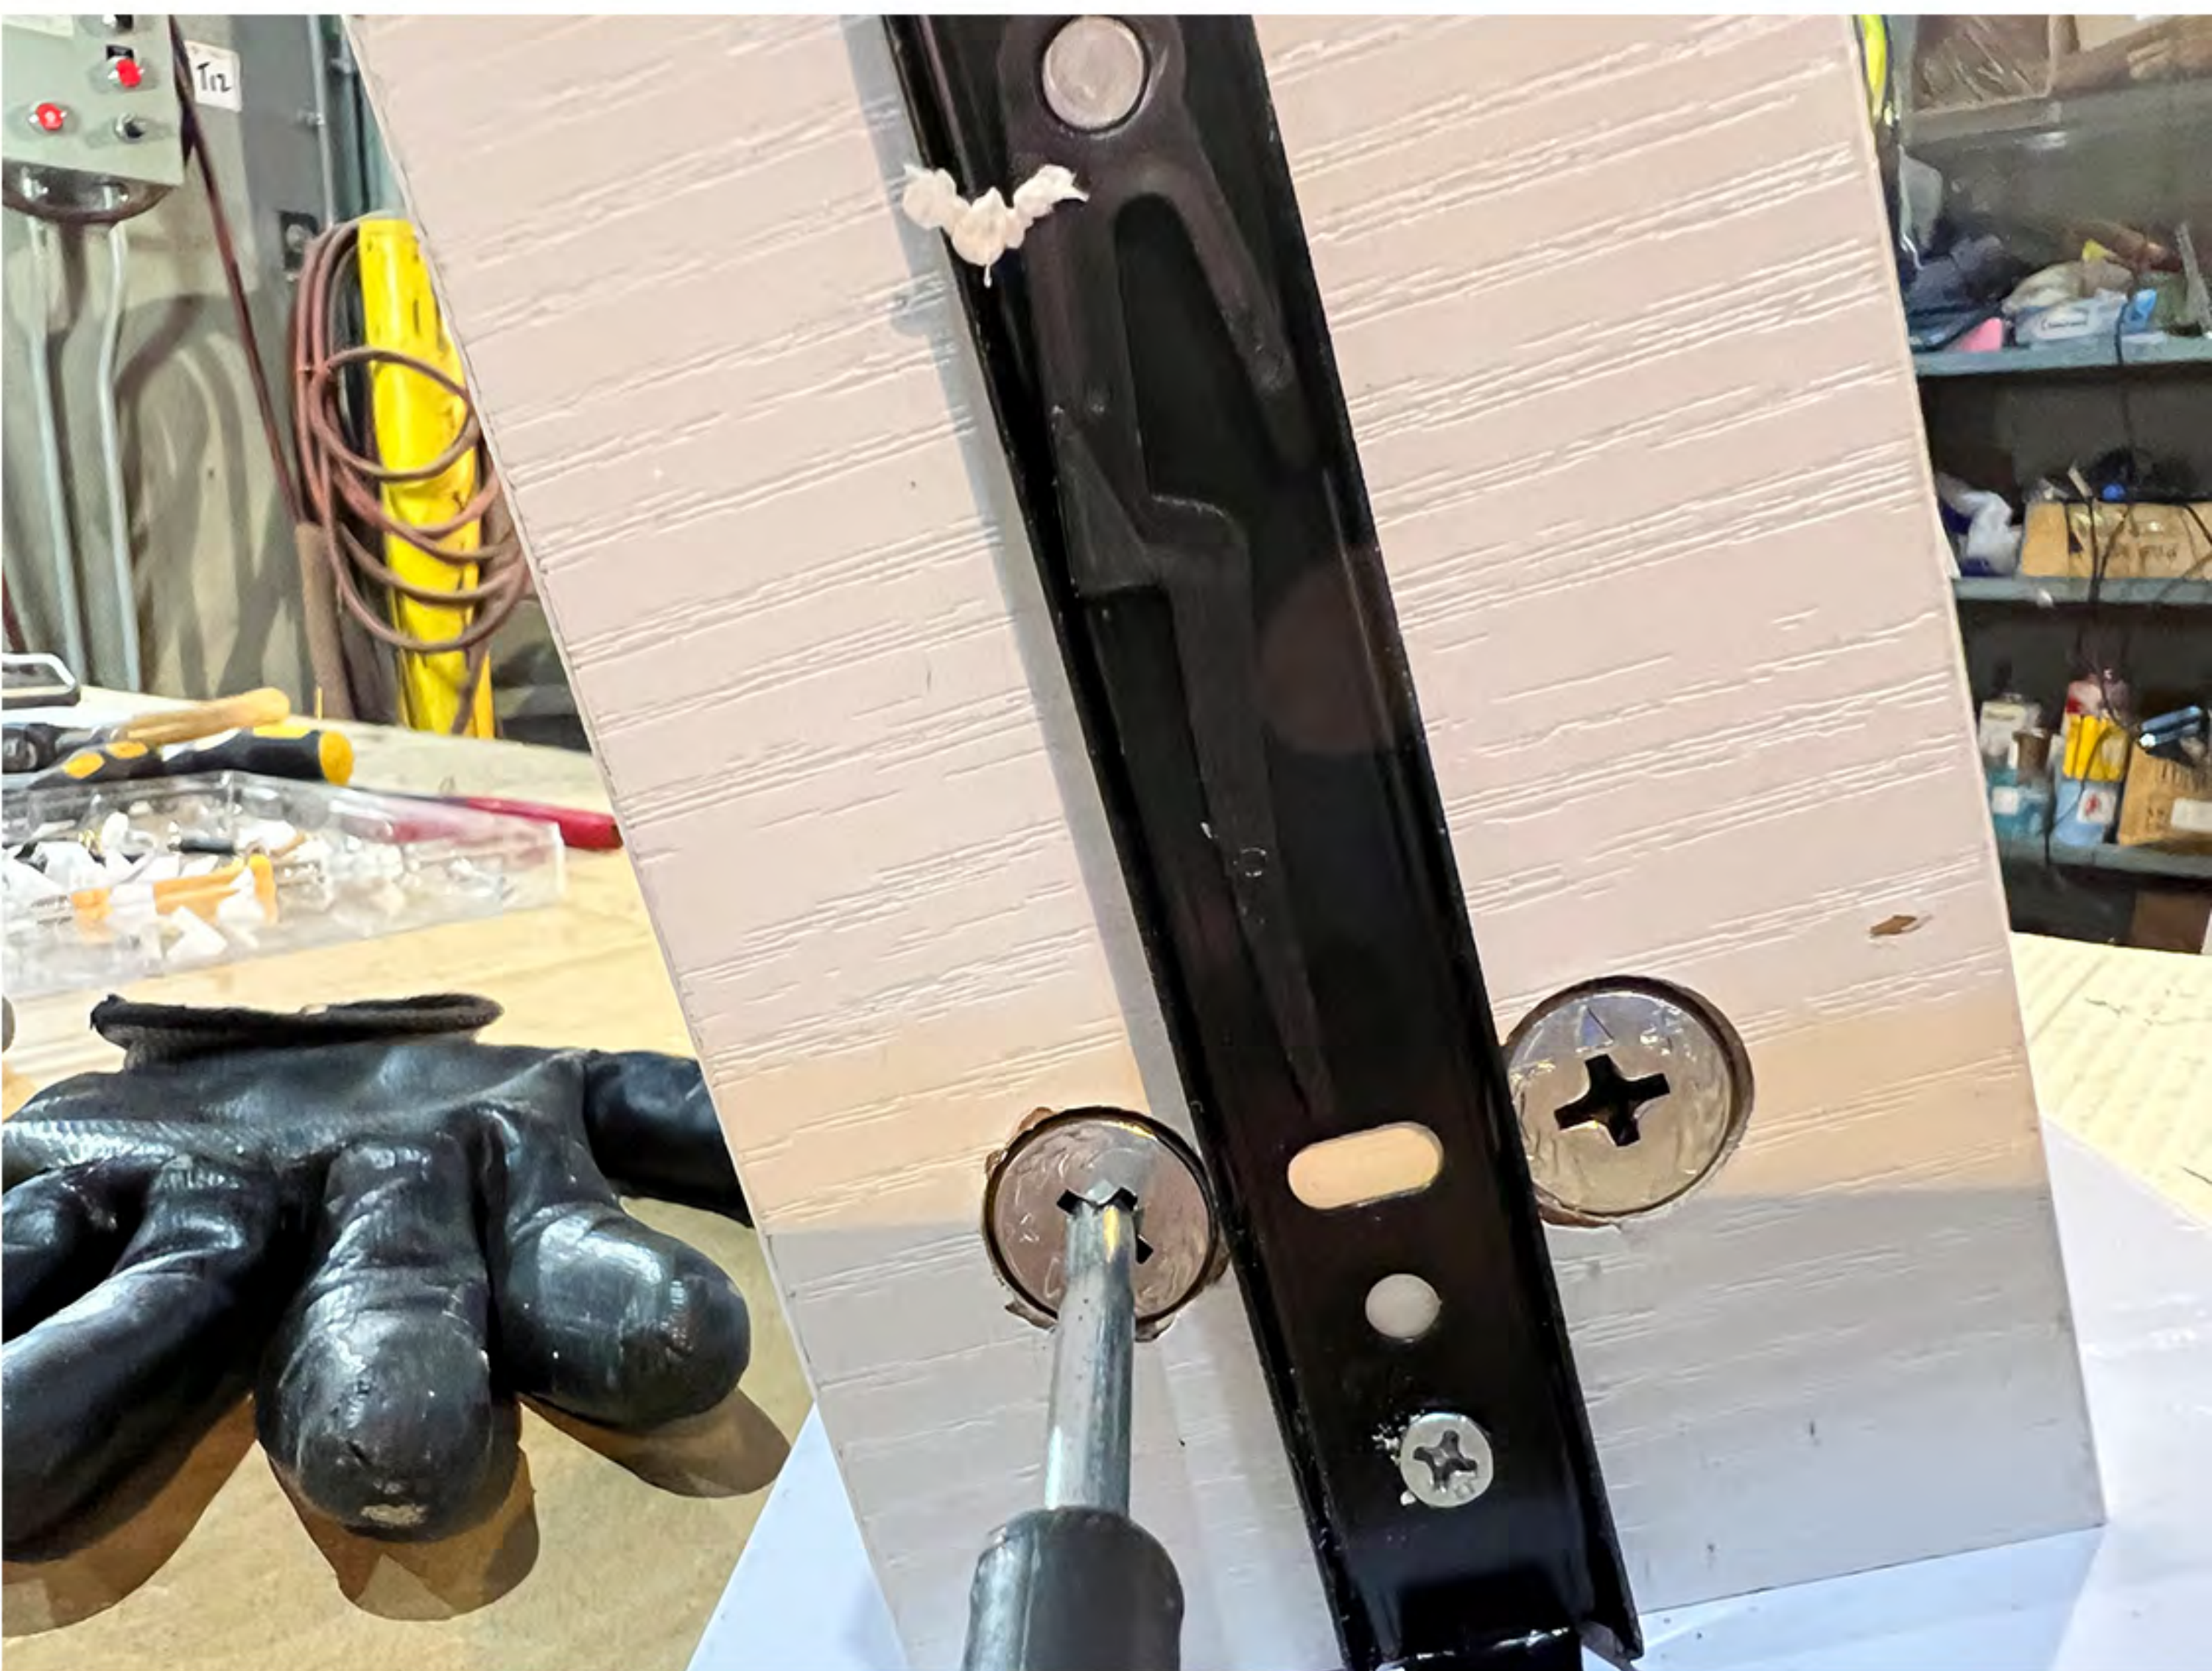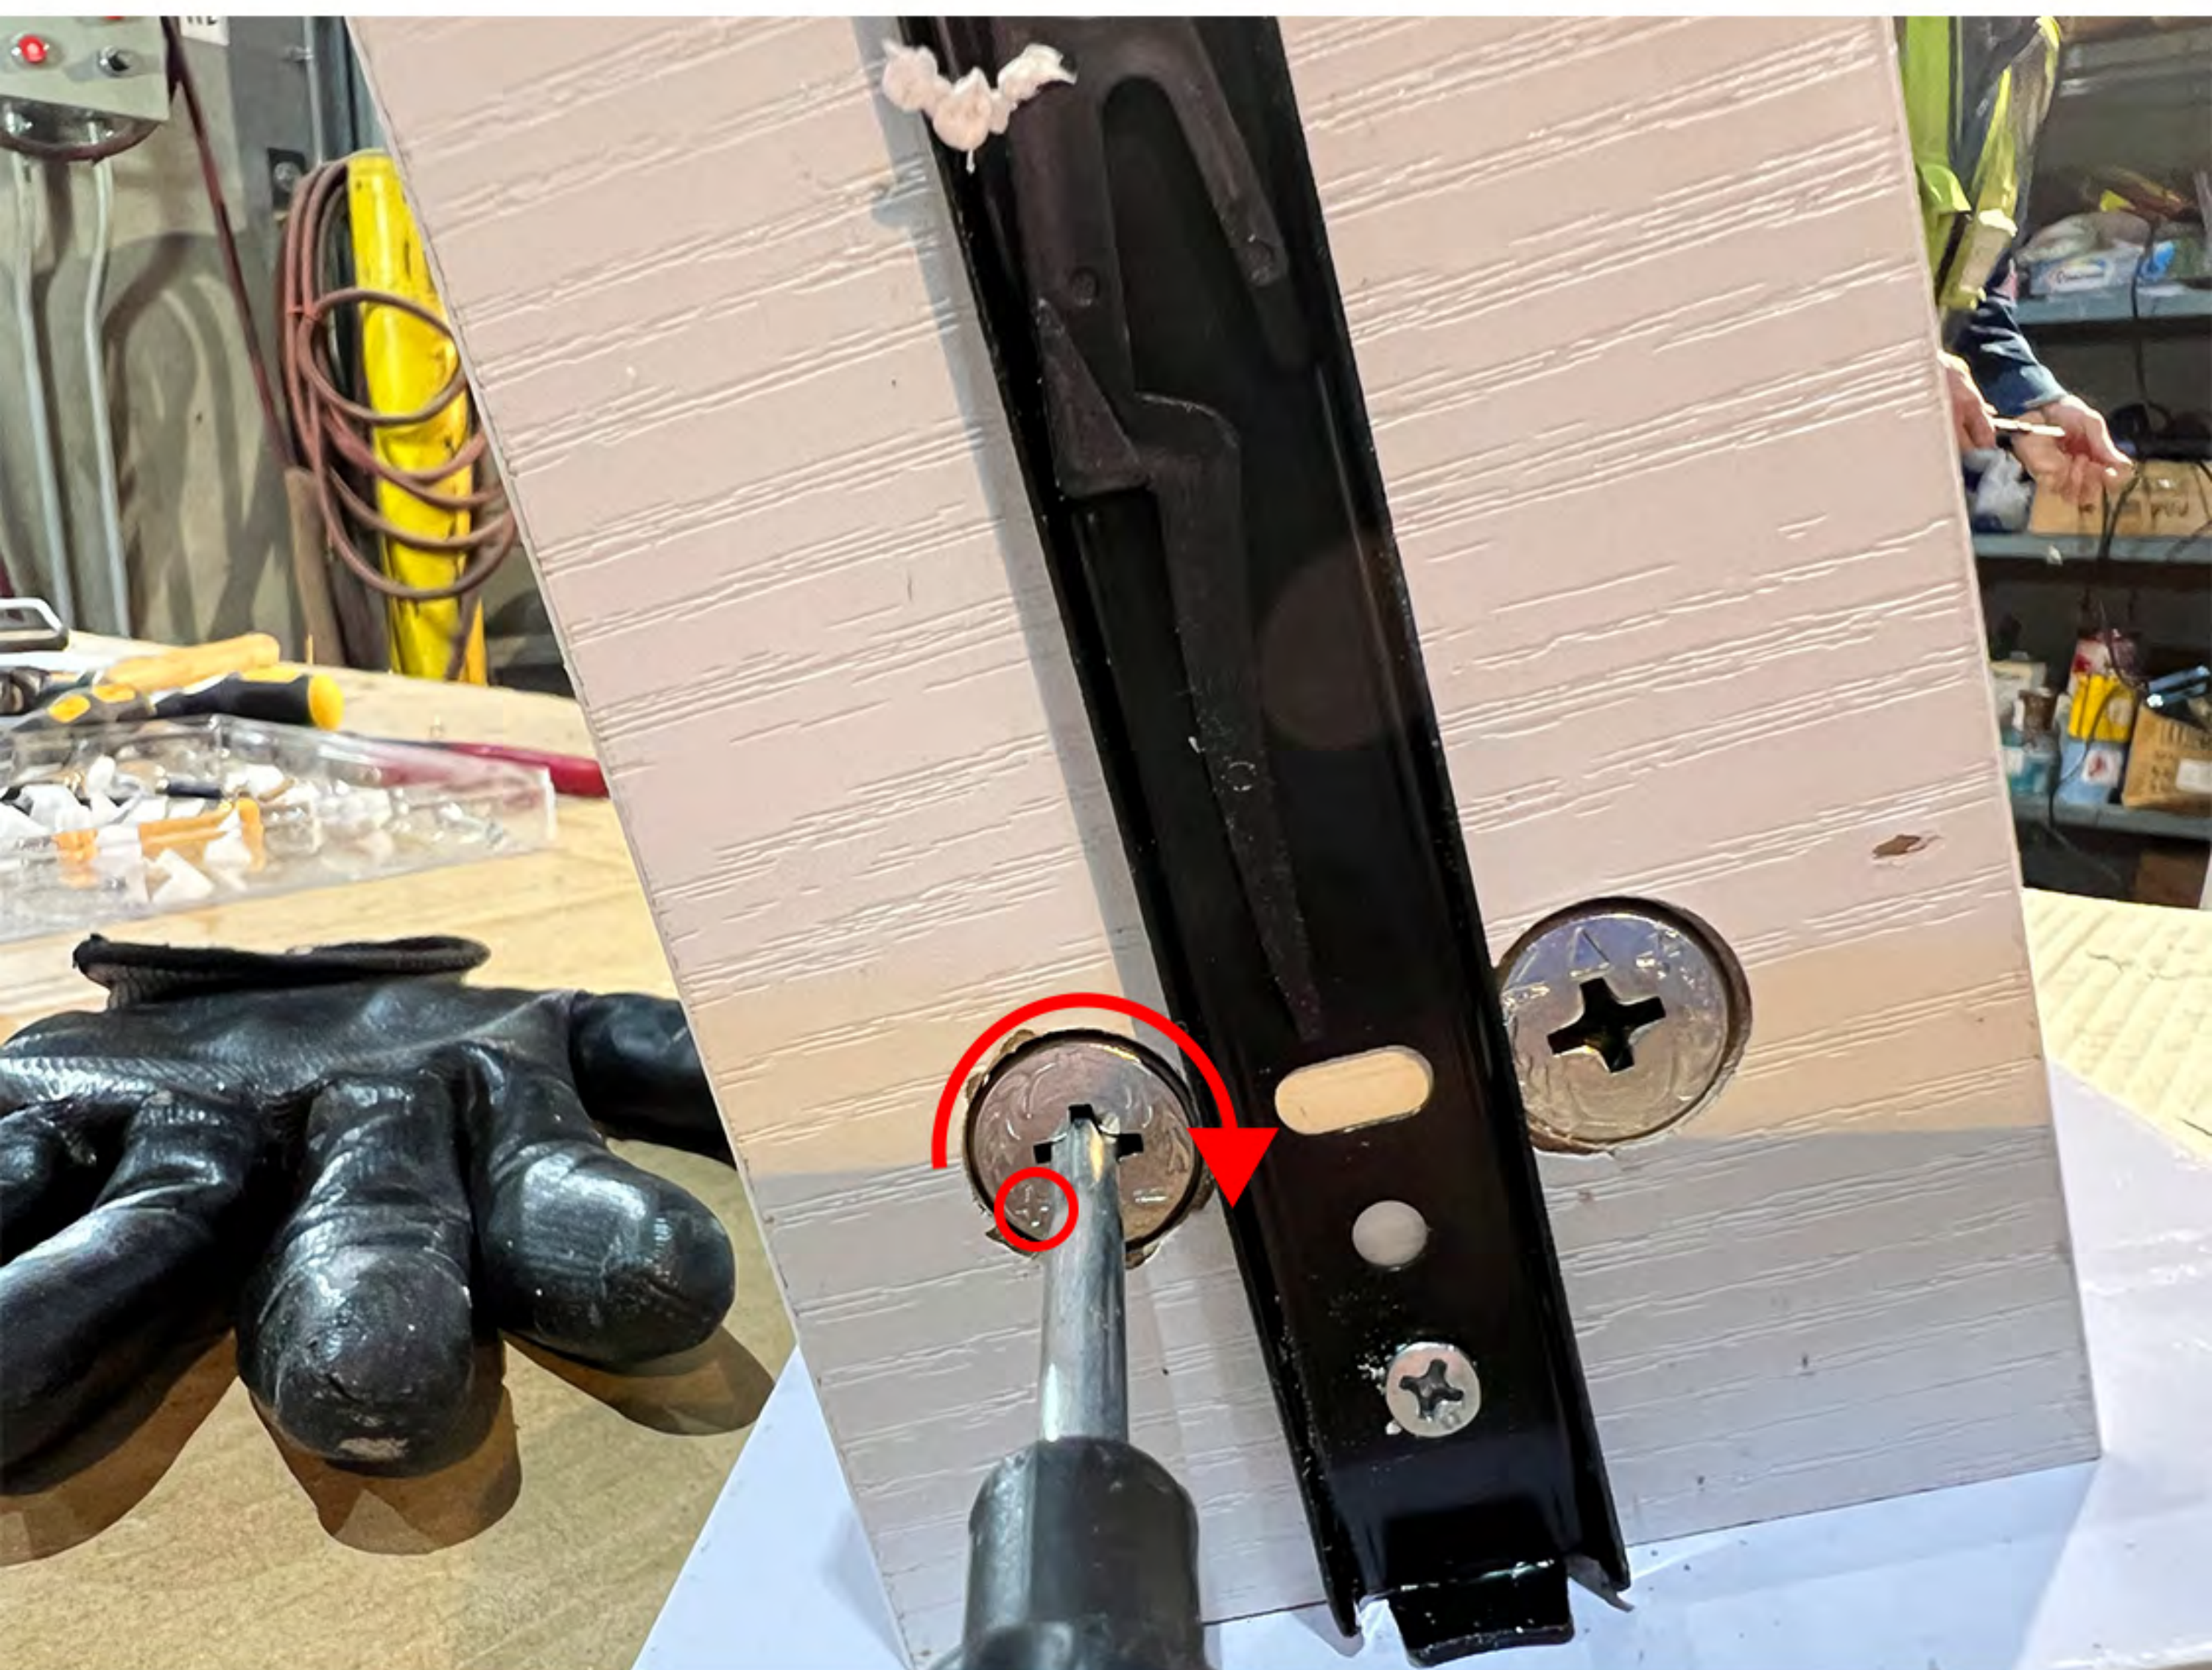



Door Panel Adjustment

Door gap is too big

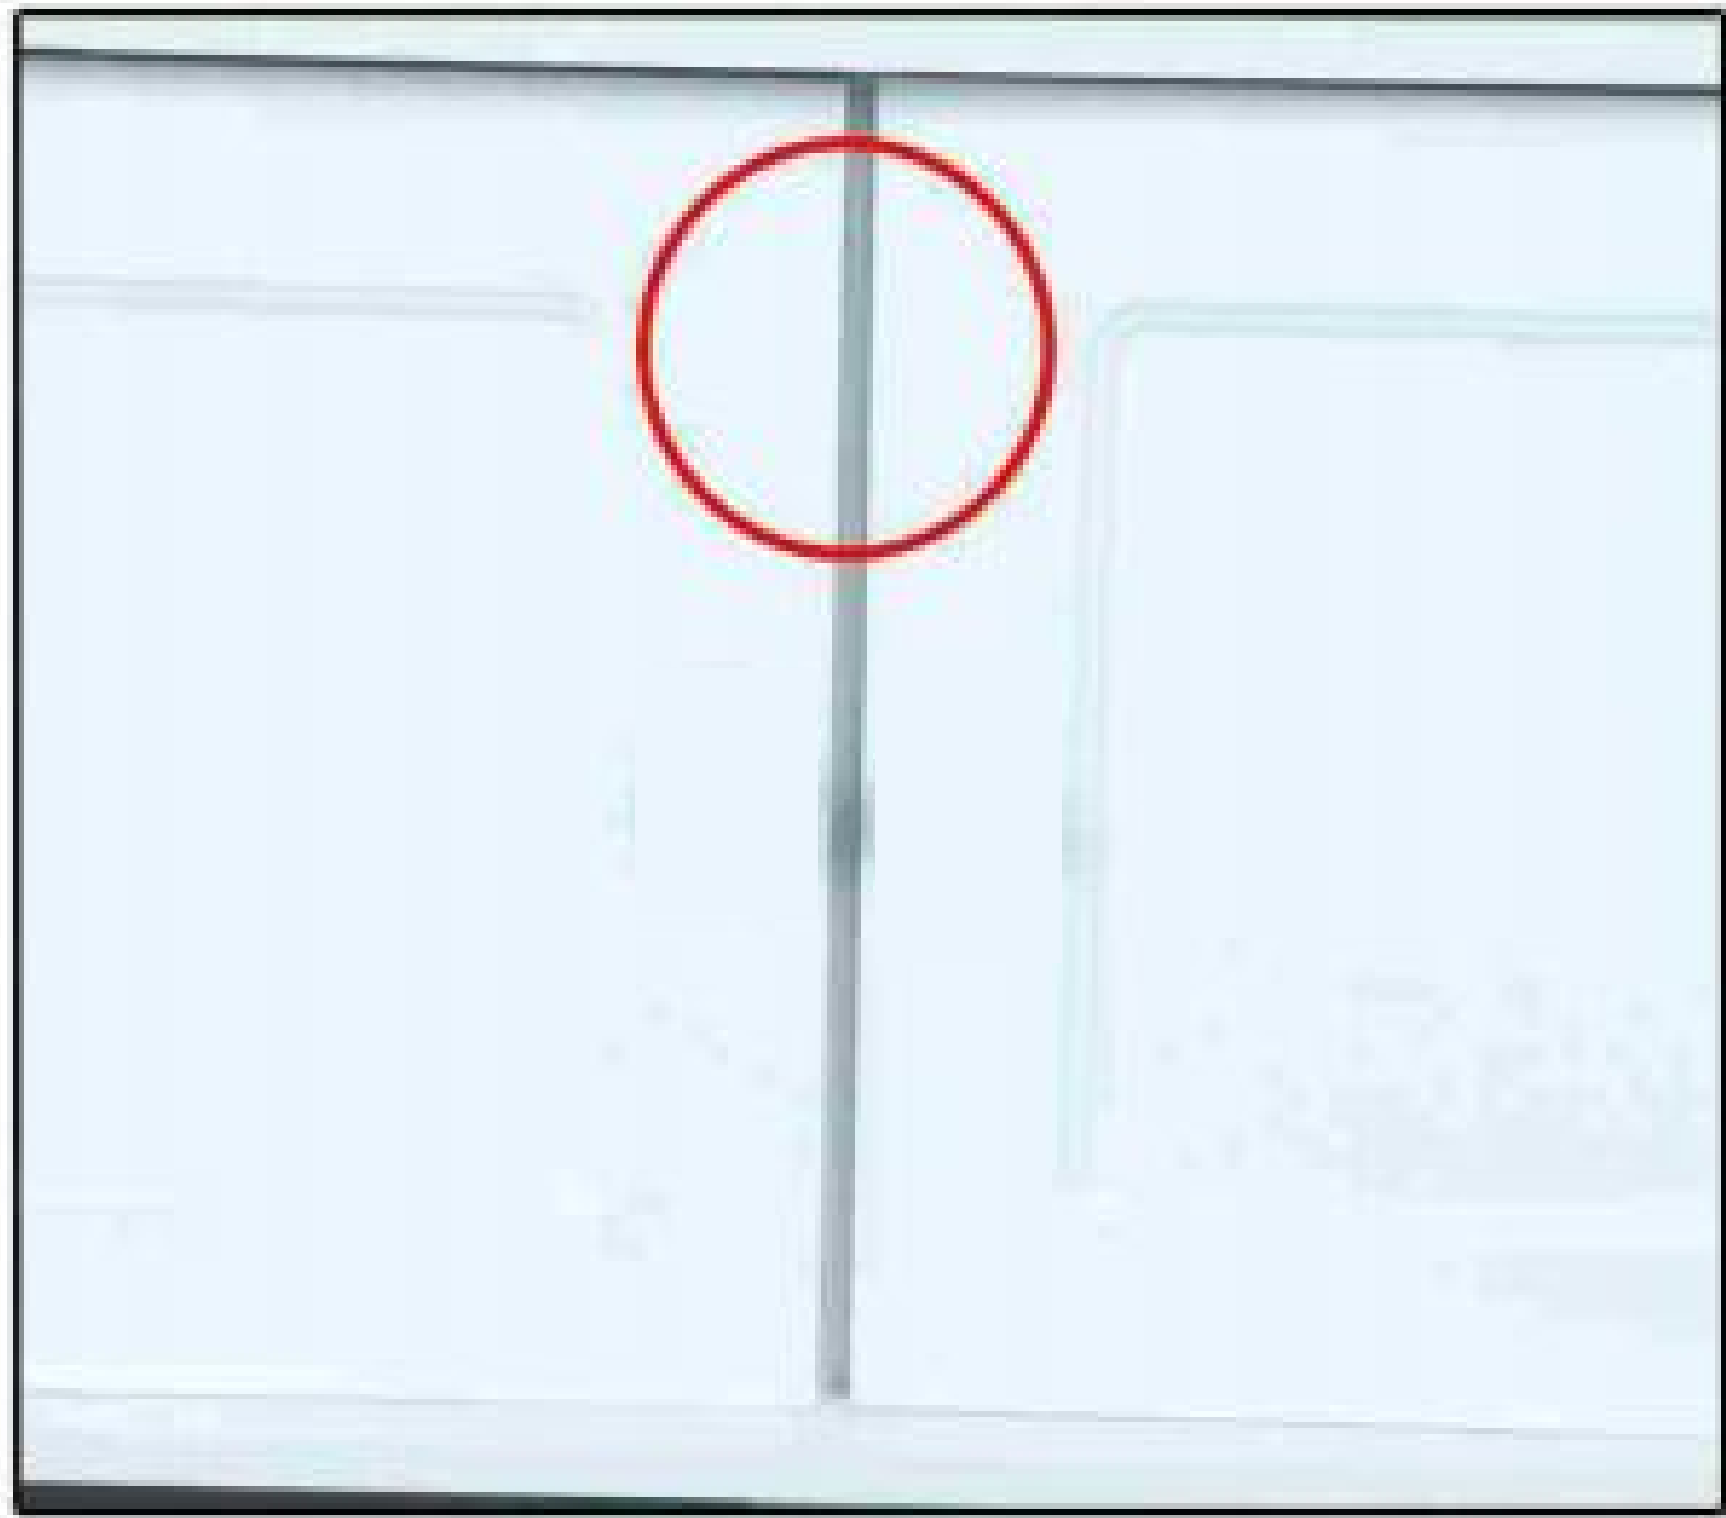



As shown in the picture, the screw that the screwdriver points to is used to adjust the door panel to move left and right, and turning it clockwise is to adjust the door panel to move toward the center.

The gap between the door panel and the side panel is too large

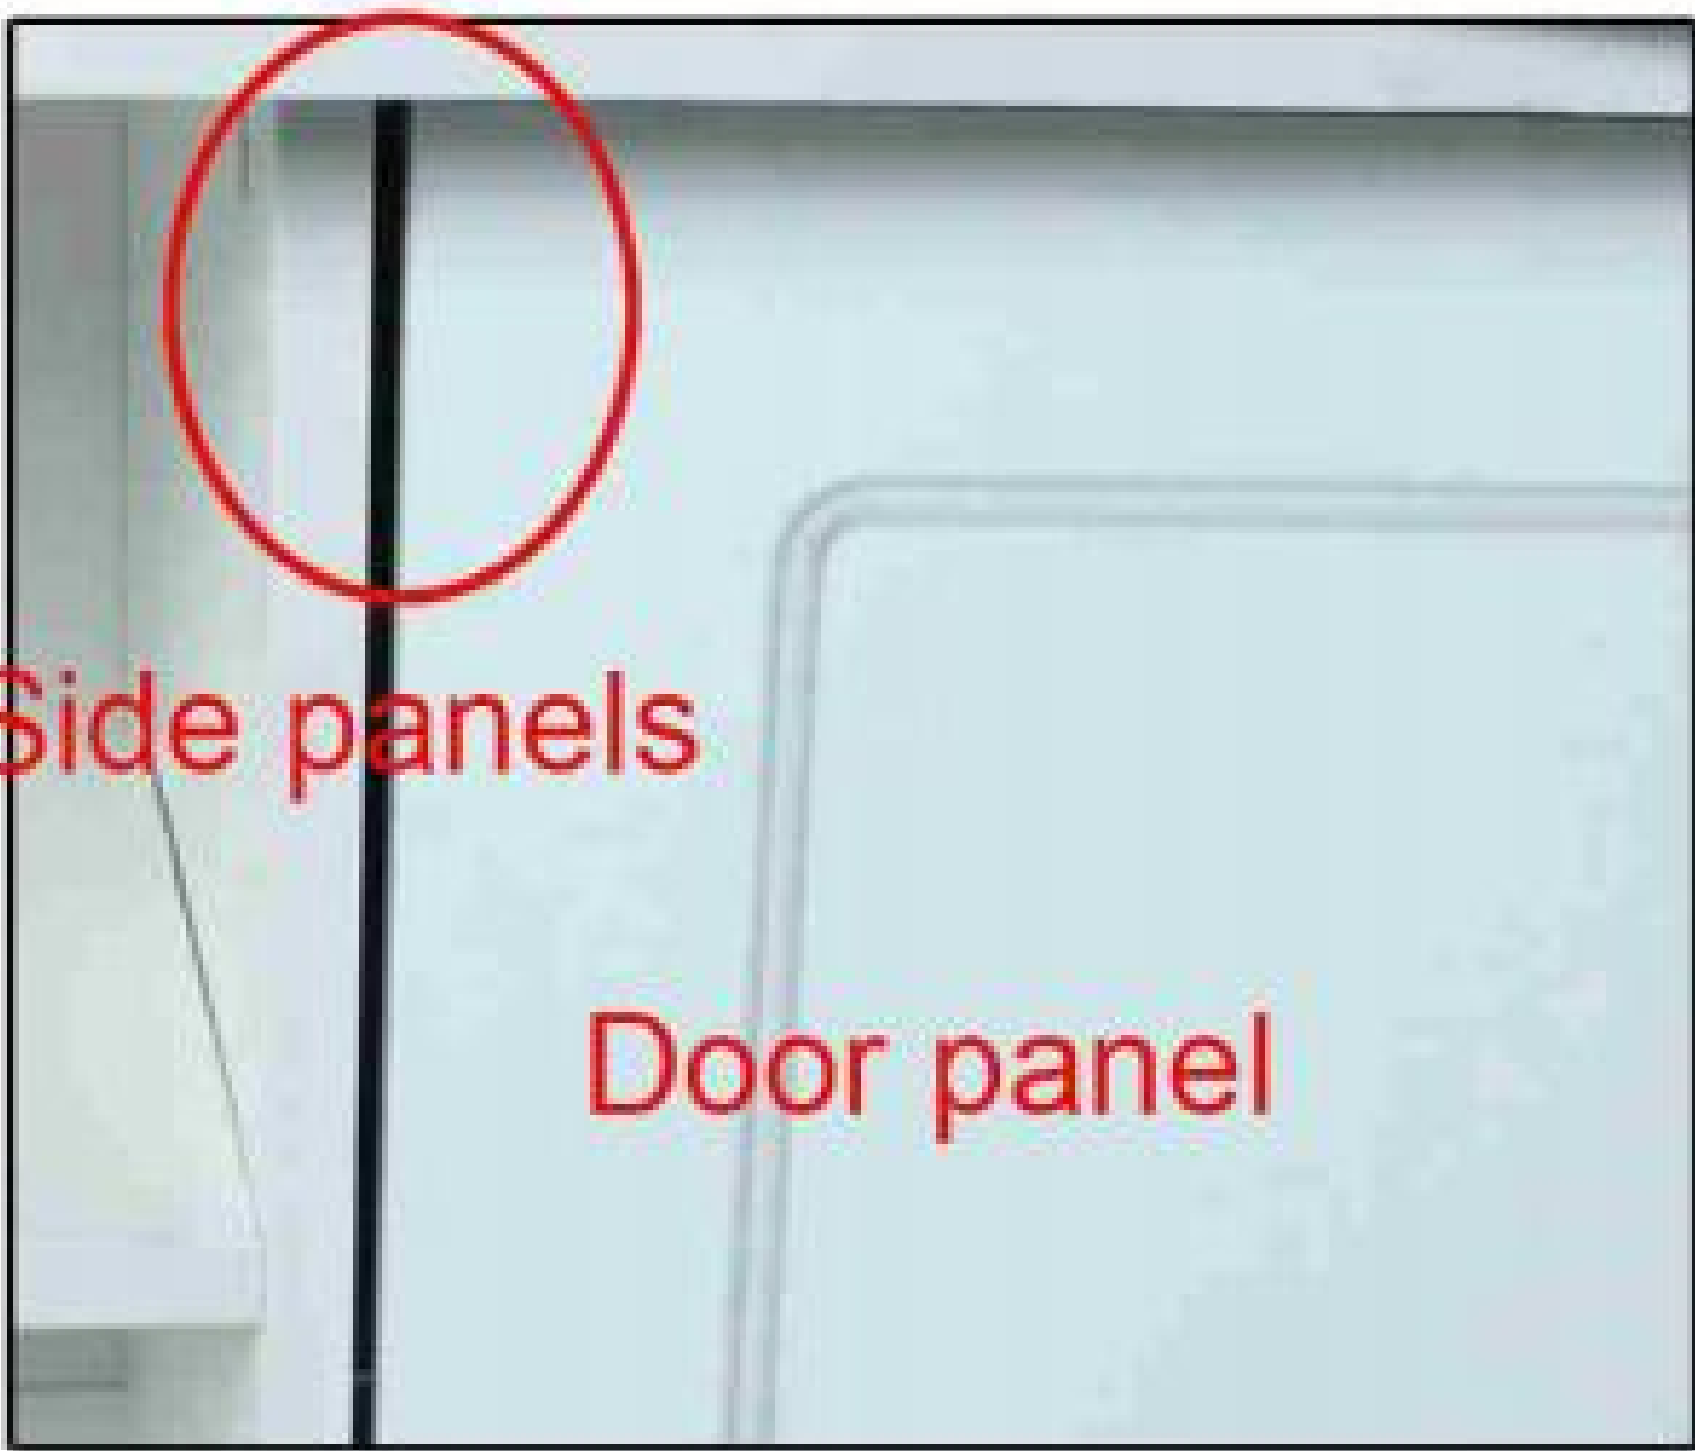

As shown in the figure, loosen the screw that the screwdriver points to, push the door panel in or pull it out, and then tighten it to solve the above problem.

Uneven door panel

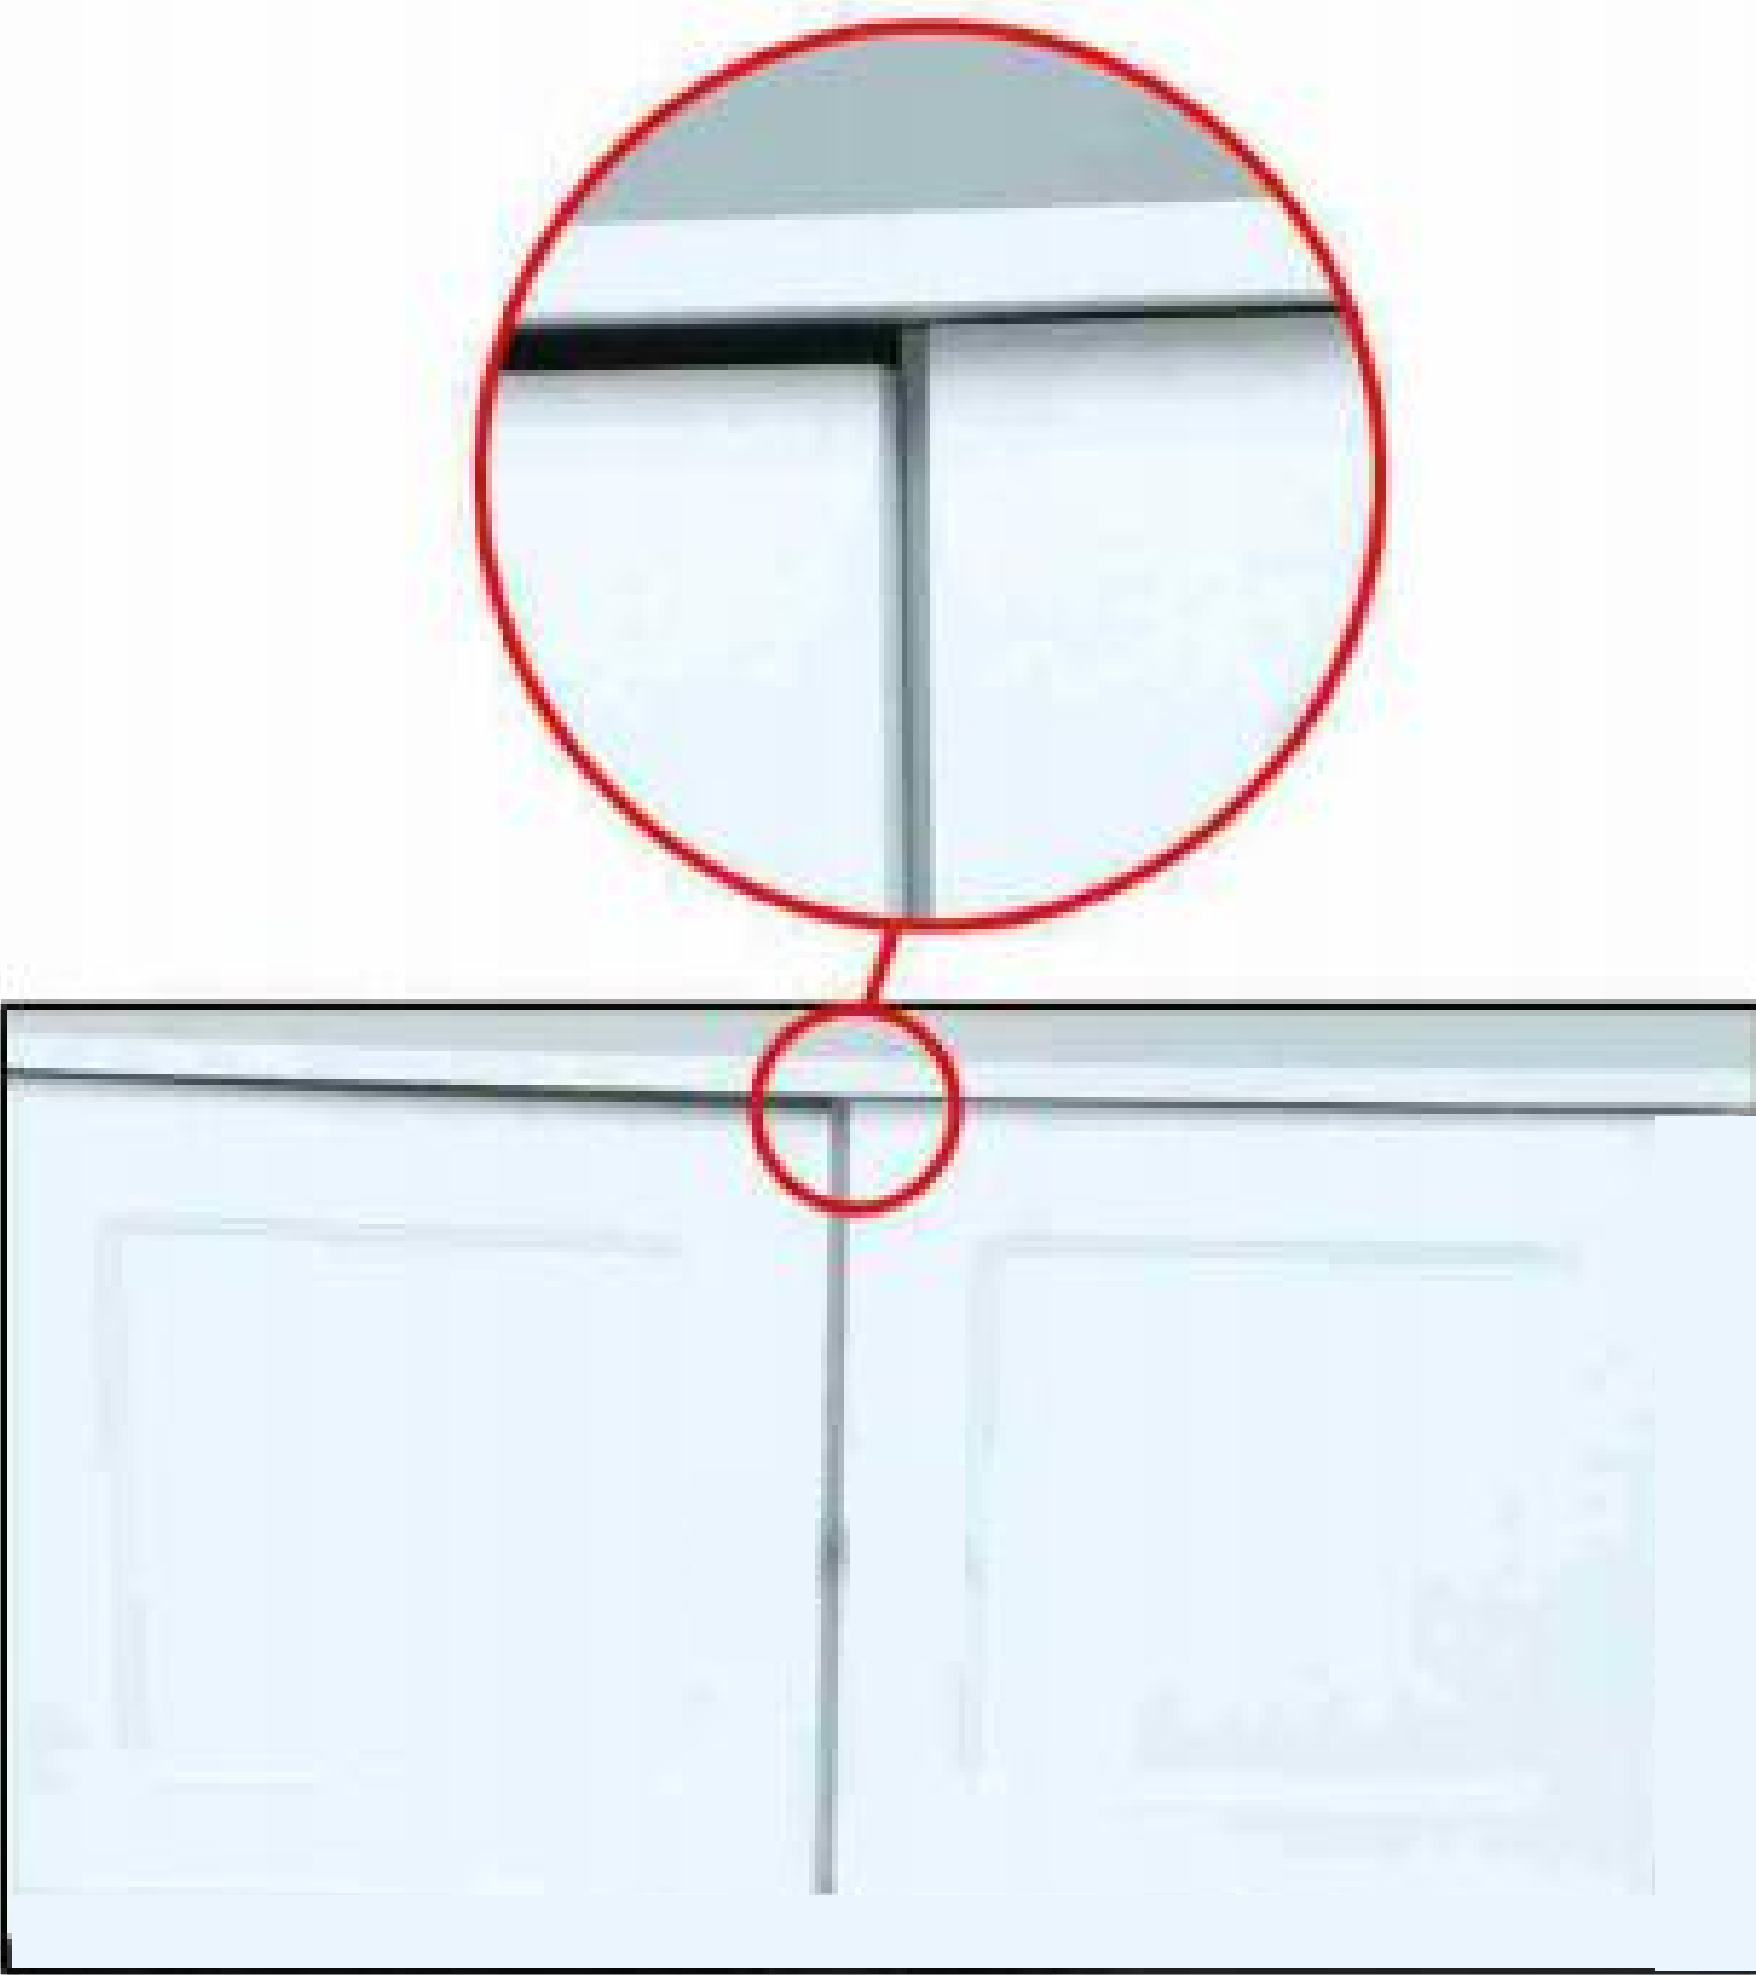


As shown in the figure, loosen the screw that the screwdriver points to, push the lower door panel and hinge upward, and then tighten the screw. Push the upper door panel and hinge downward, and then tighten the screw.

Hardware List




Please be sure to use a manual screwdriver and refrain from using an electric drill.


Panel List

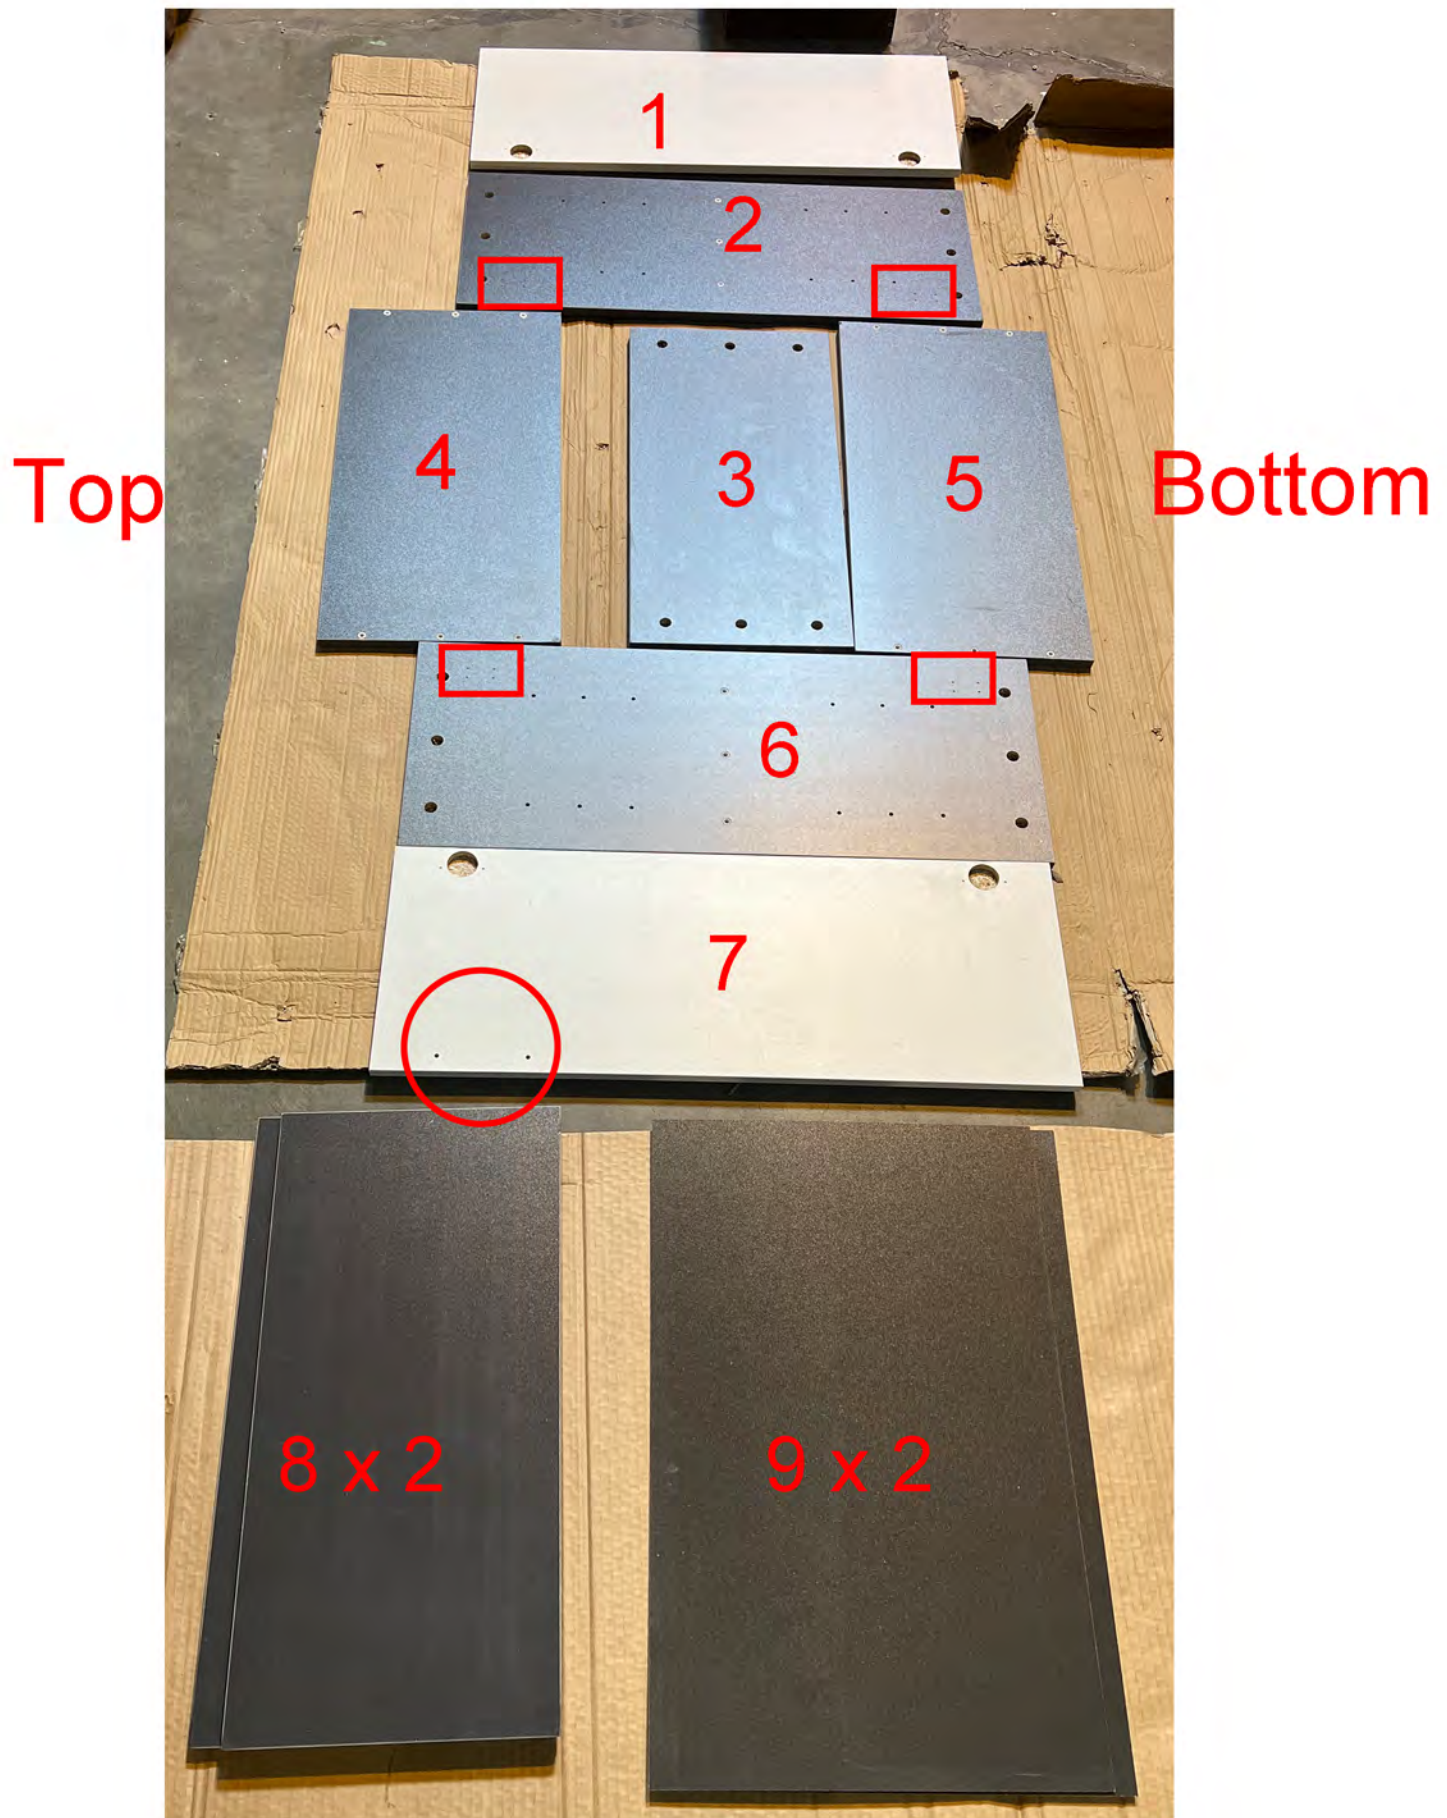

Pay attention to the pre-drilled holes on the panels and ensure correct positioning during assembly.

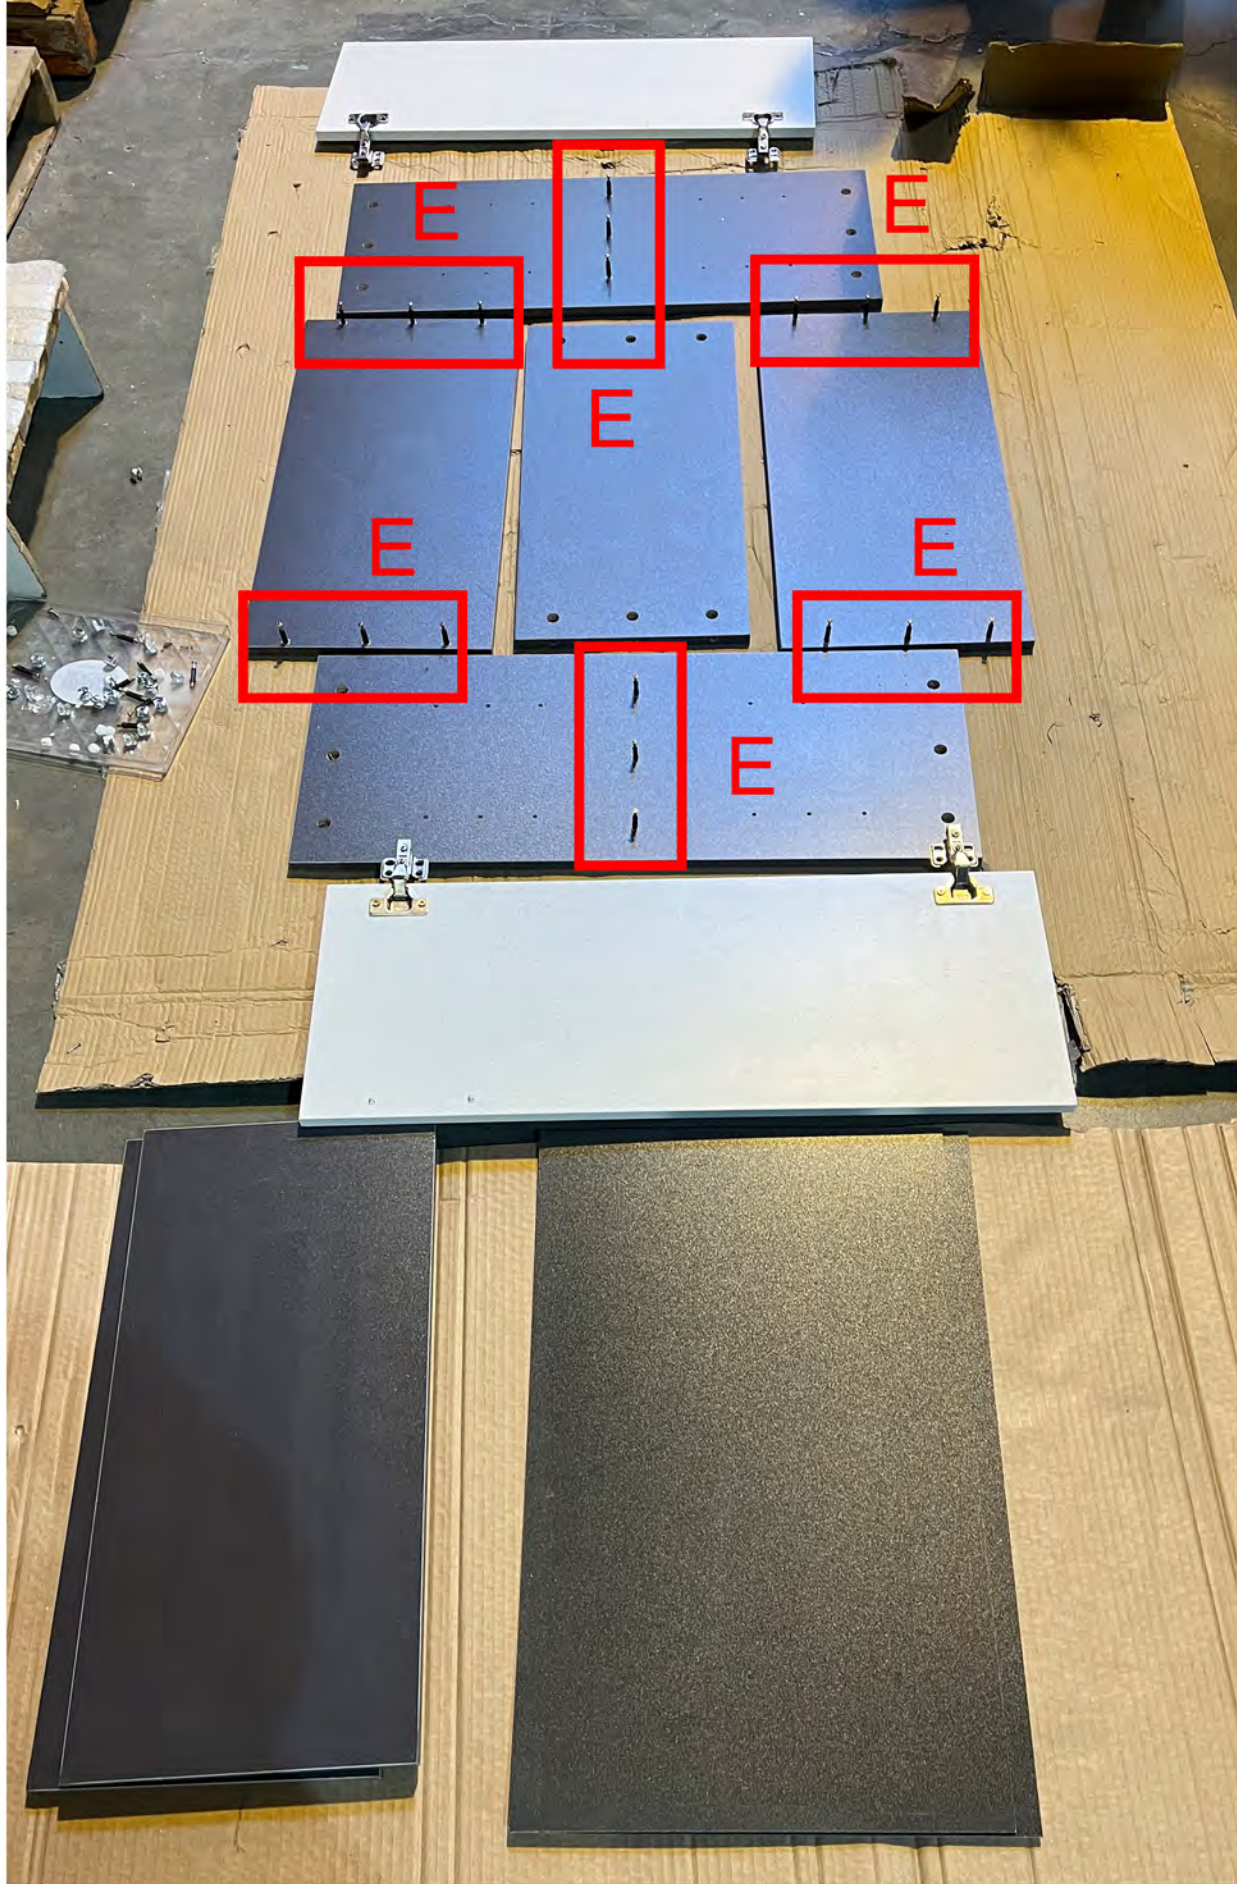

Tighten E into all white pre-installed inserts. Do not overtighten—stop once resistance is felt and the fitting is secure without looseness. Ensure vertical installation as much as possible.

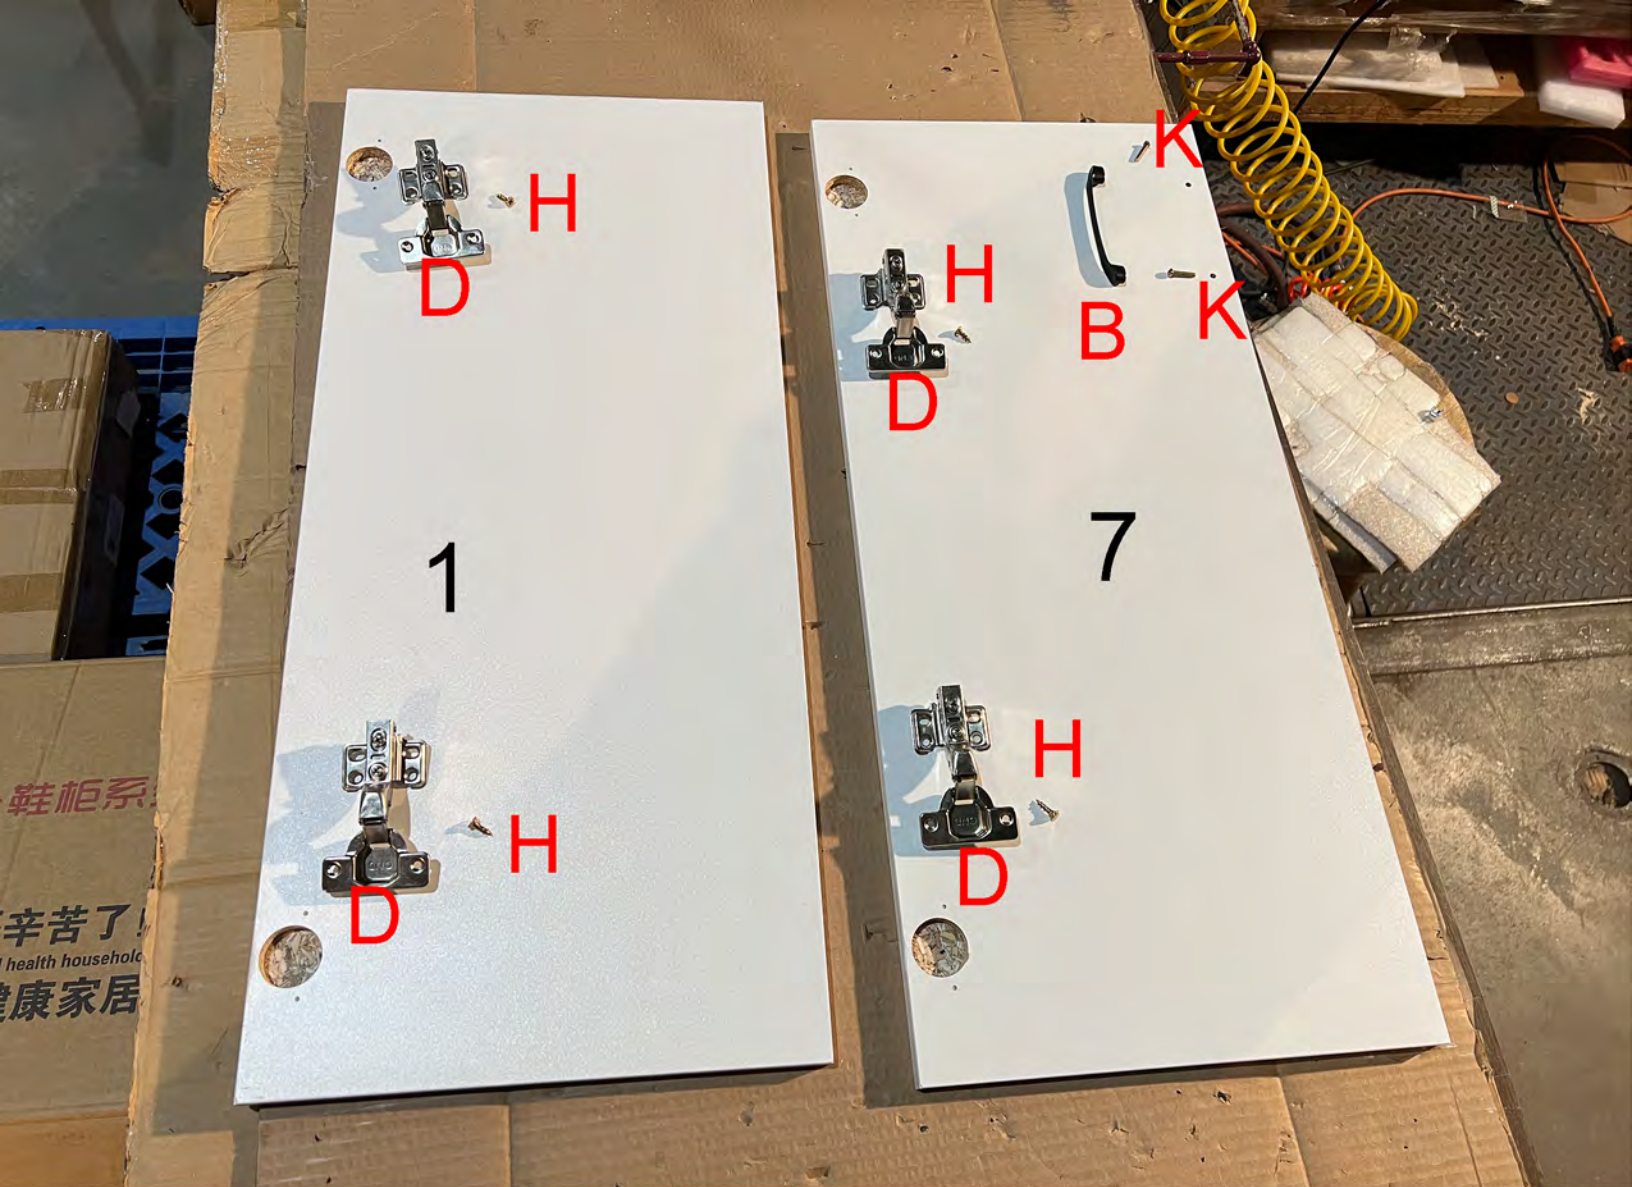

Panels 7, attach B using K. **Install B on the outer-facing side.**






Attach D to Panels 1 & 7 using H

It is recommended not to fully tighten part H at this stage—lightly fasten it first, and fully tighten it at the final step.



When connecting the panels, make sure the side with the small pre-drilled holes is facing down.

The connected panels should form a flat, even surface. If any unevenness or misalignment occurs, rotate or flip the panels to locate the correct positioning.

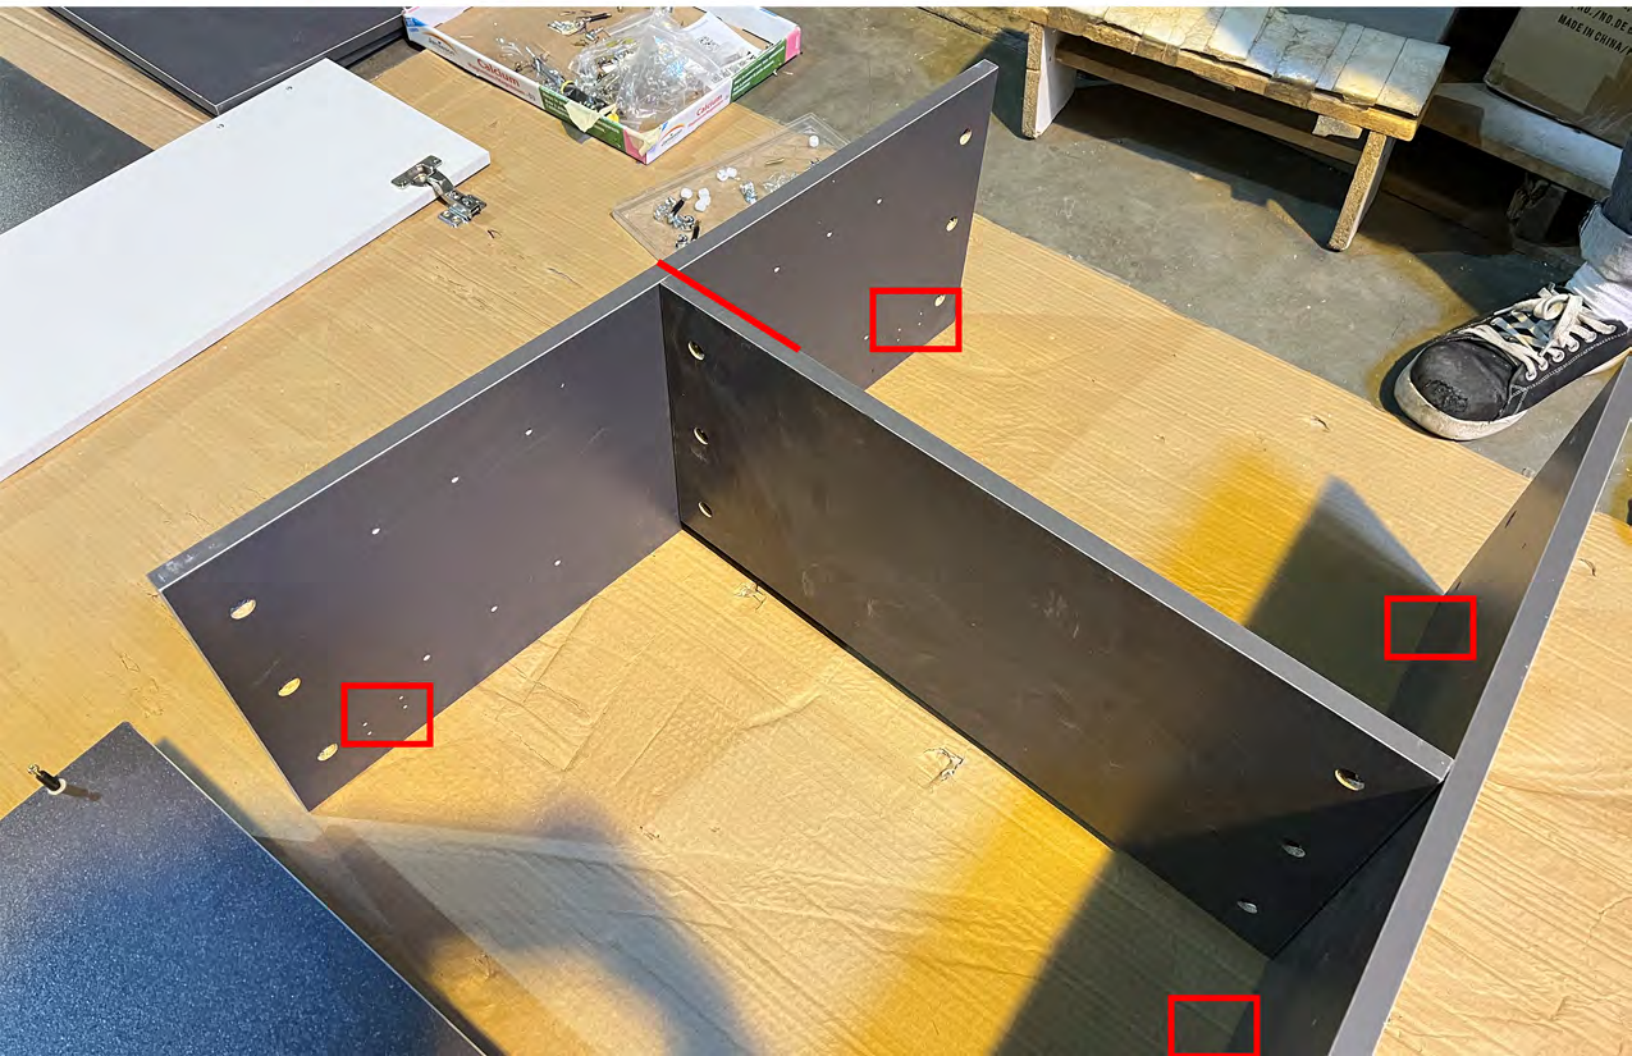



Secure part F into the large pre-drilled holes.
Refer to the "Instructions for Using Eccentric Bolts" for detailed guidance.






Inspect the bottom for gaps. If none are visible, verify that all panels are oriented correctly.




1/2"

Leave about a 0.5-inch gap between each leg and the edge of the panel.

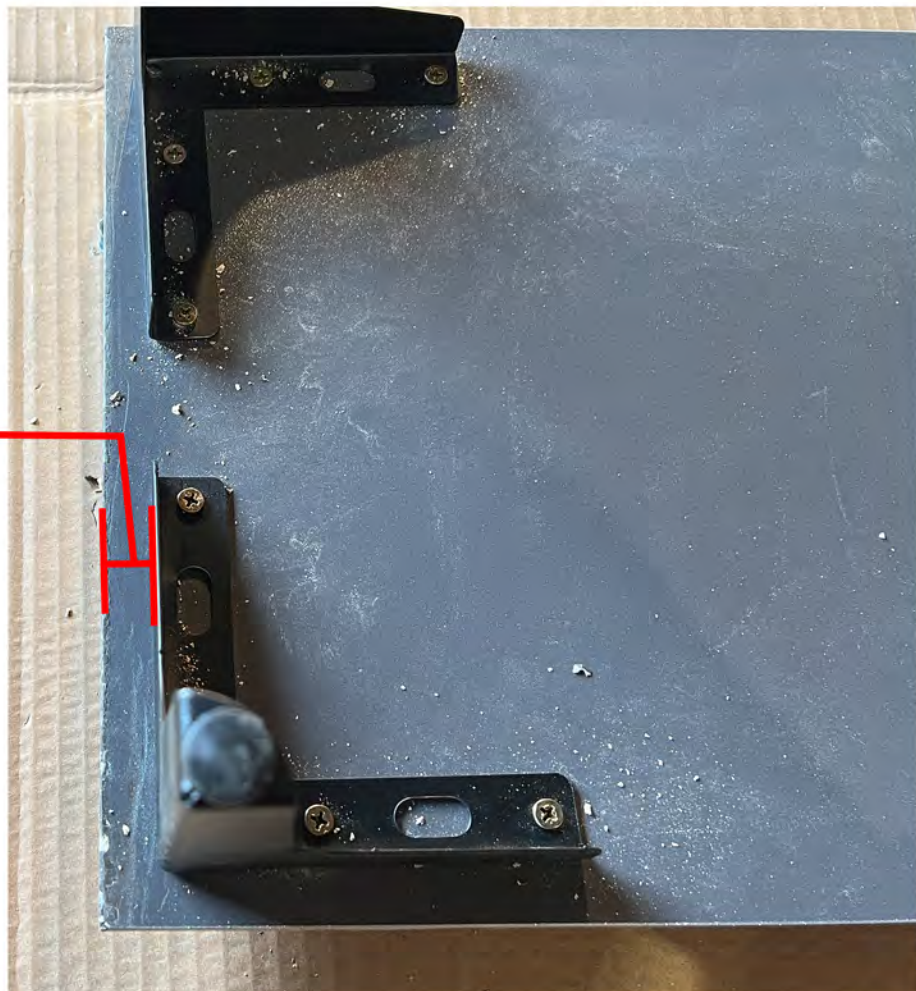


Top

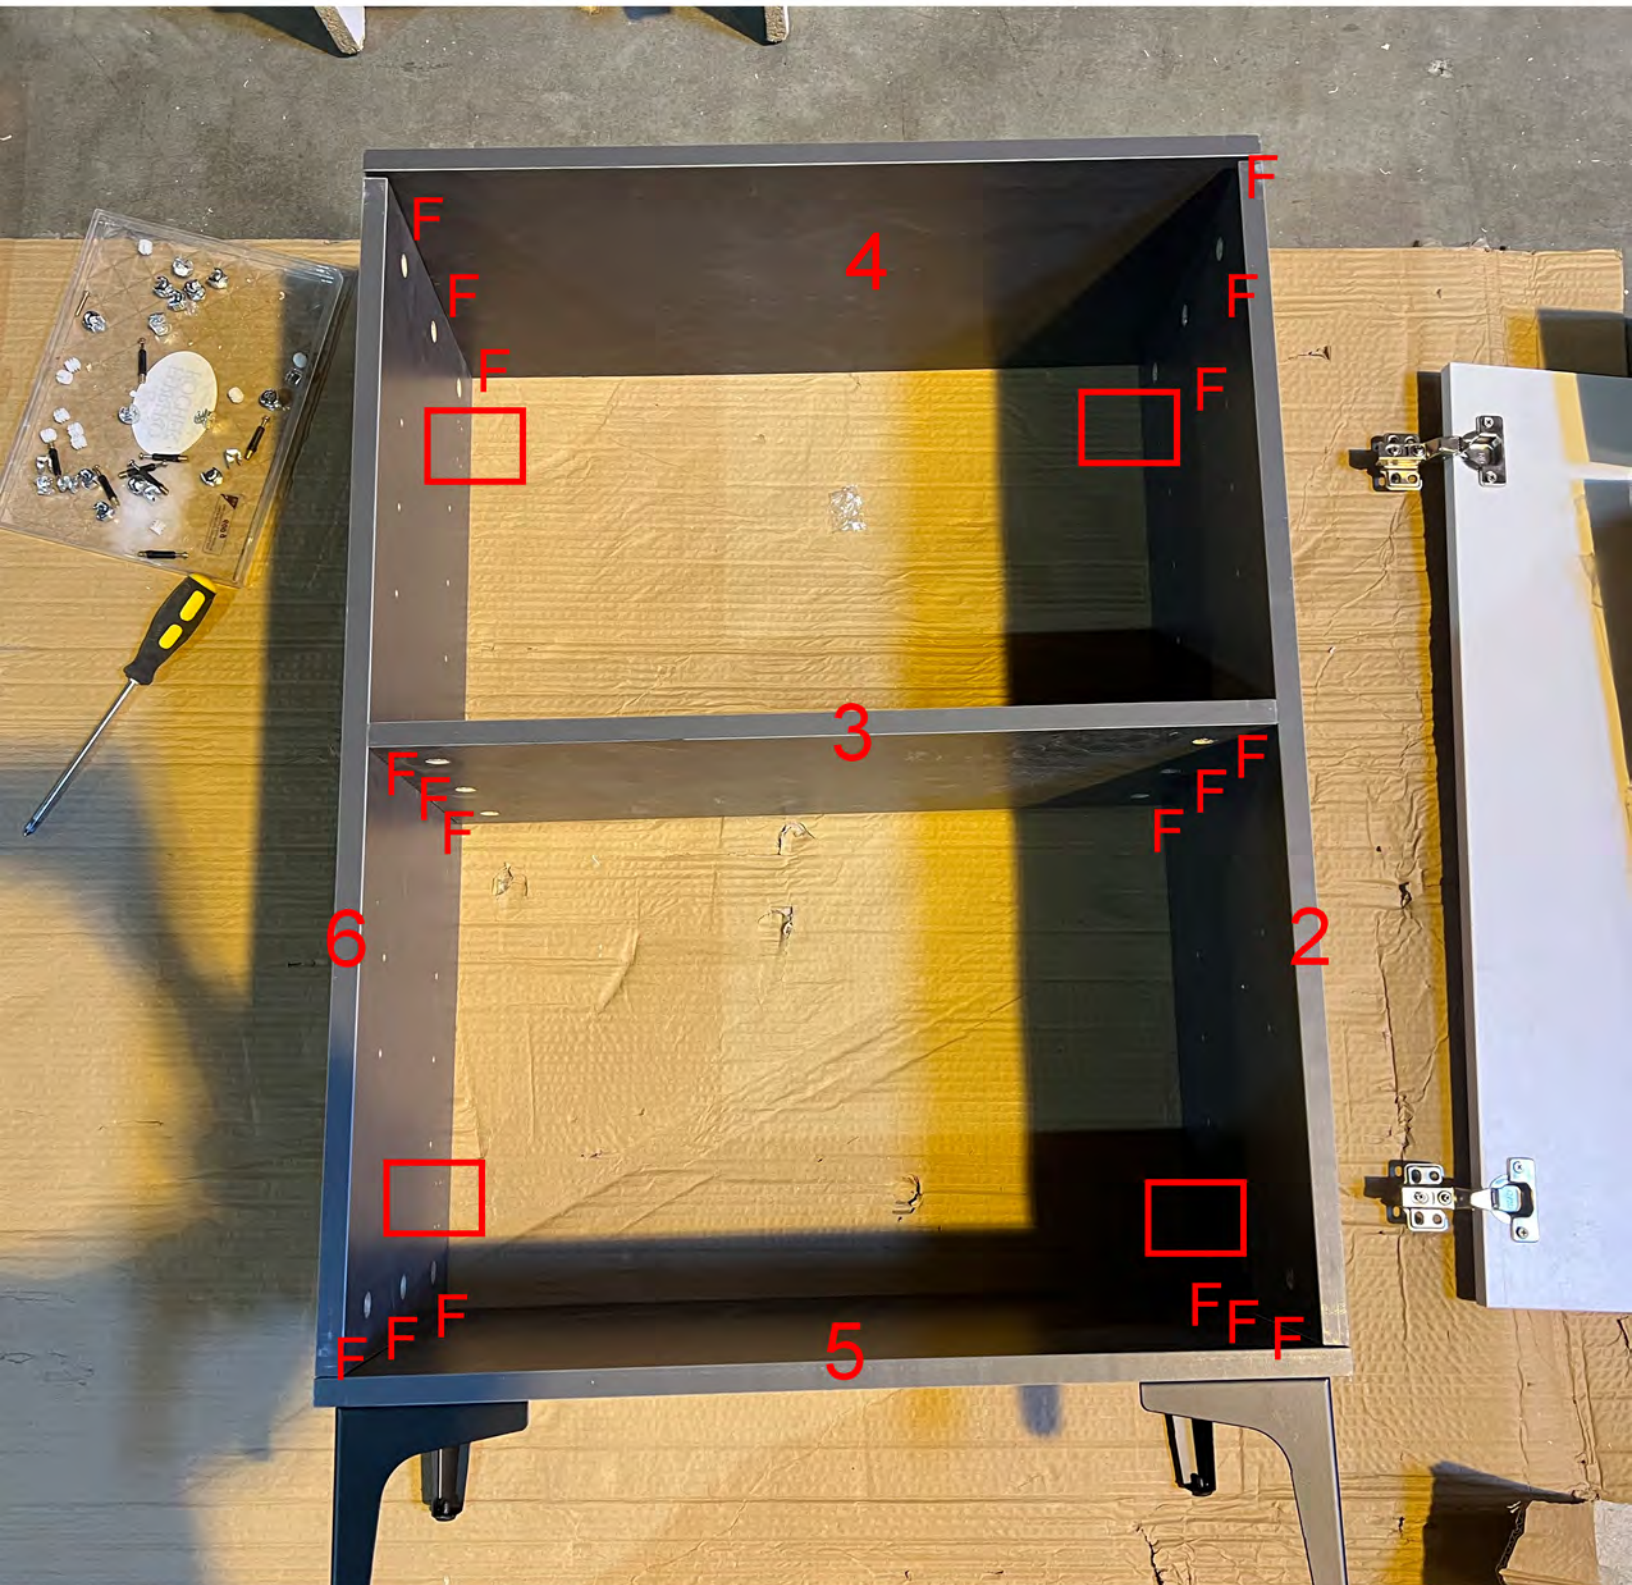

Bottom


Lock all large pre-drilled circular holes using F.

When connecting the panels, make sure the side with the small pre-drilled holes is facing down.

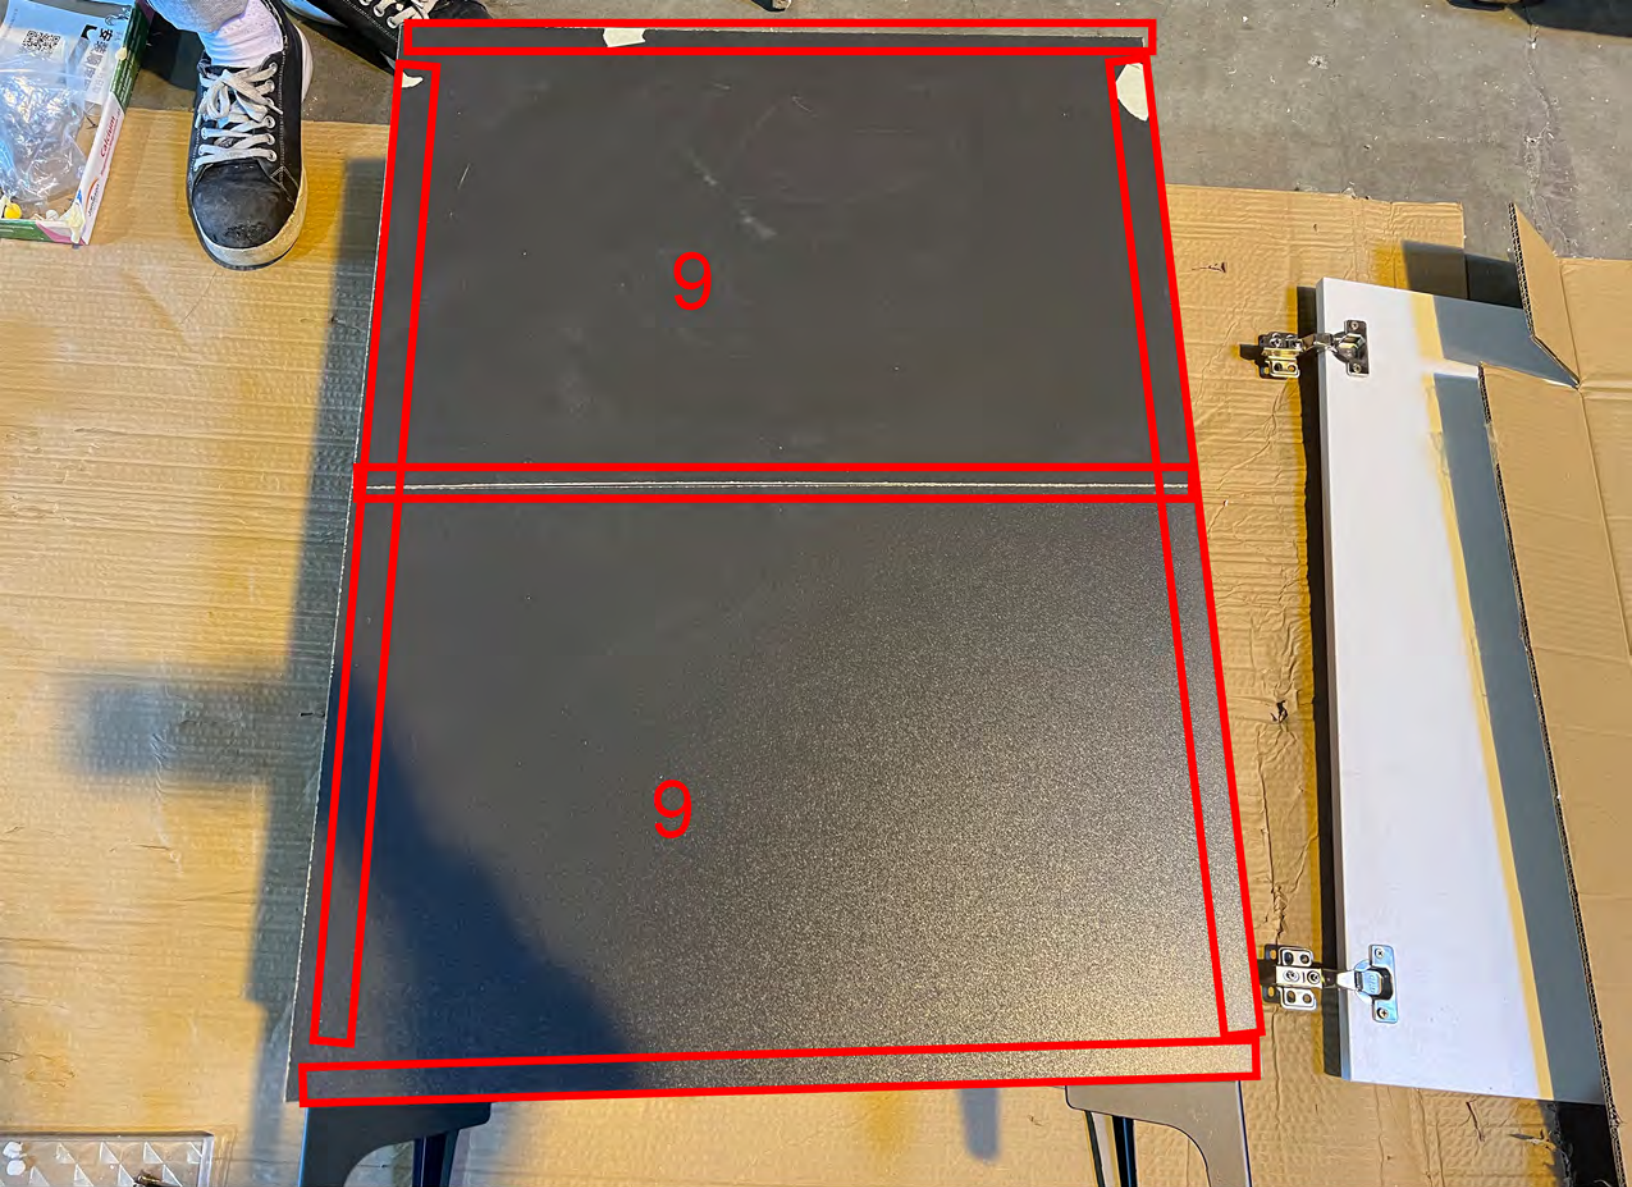



Place 9 (the back panel) in the correct position, fully covering the back side of the cabinet. Make sure to leave enough space along the edges for proper fastening. 9 x 2 should be installed using the same procedure.



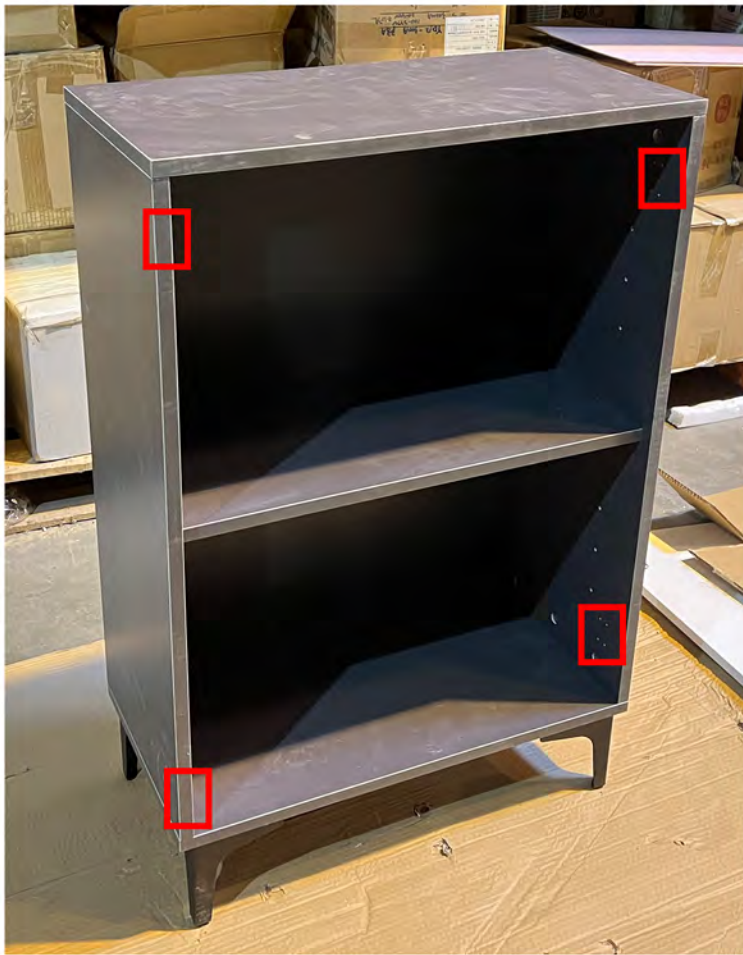

Gently stand the cabinet up and prepare to install Panels 1 & 7 Make sure the side with the small holes faces outward.

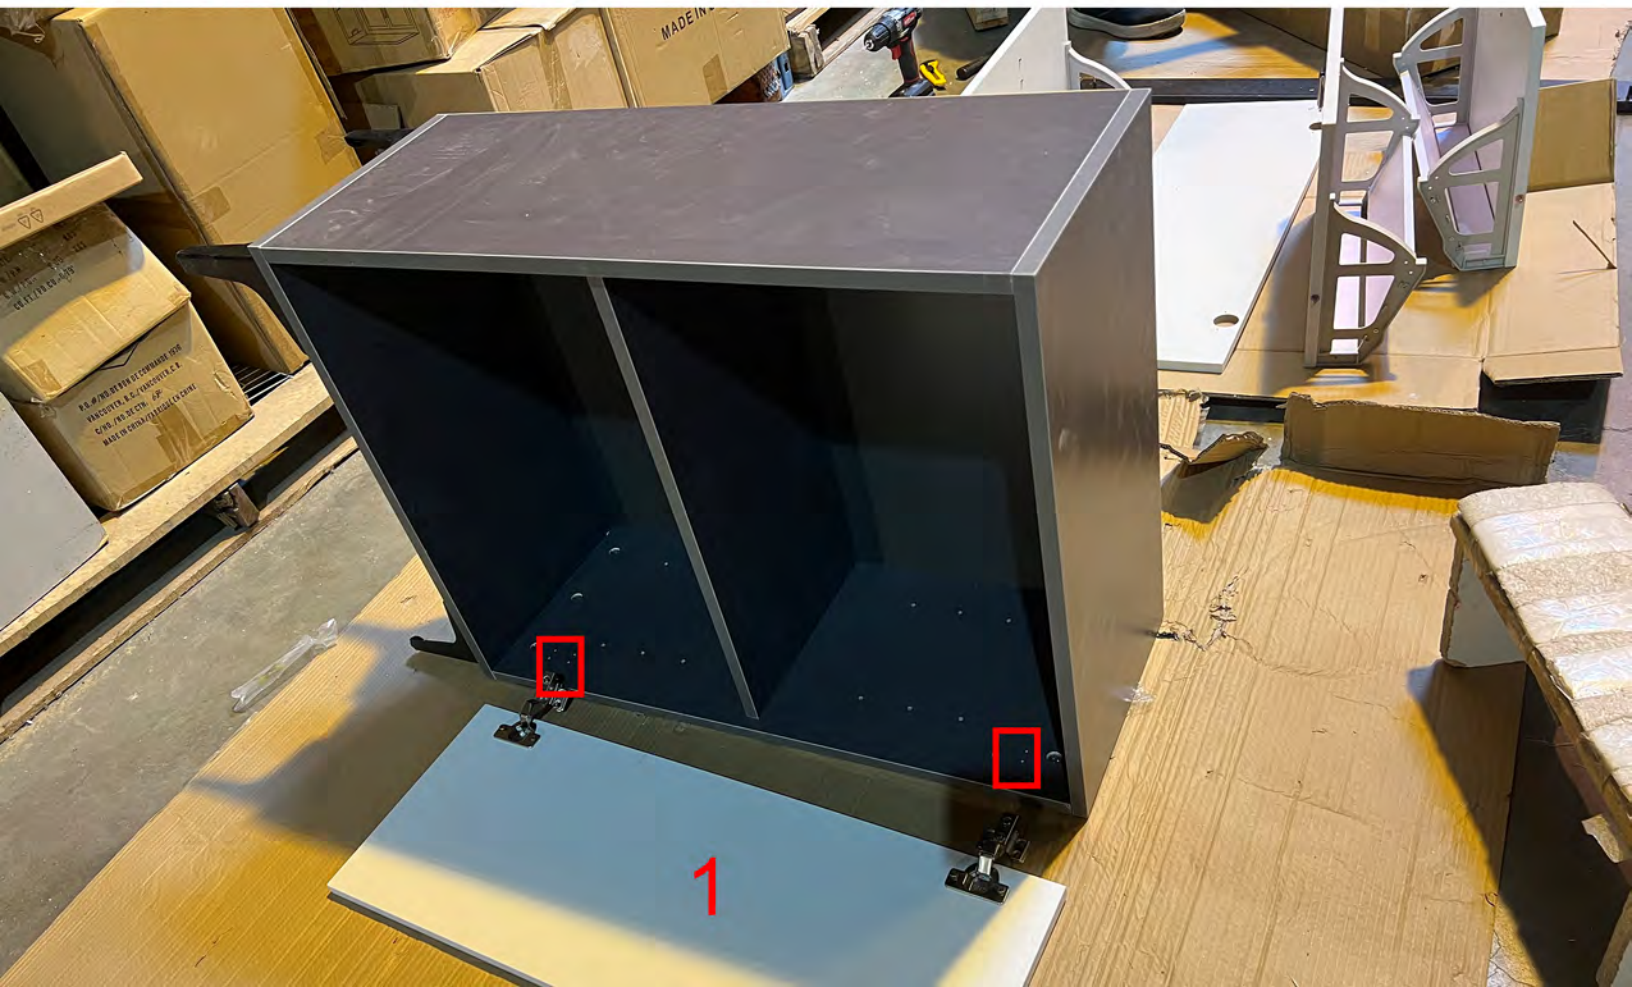

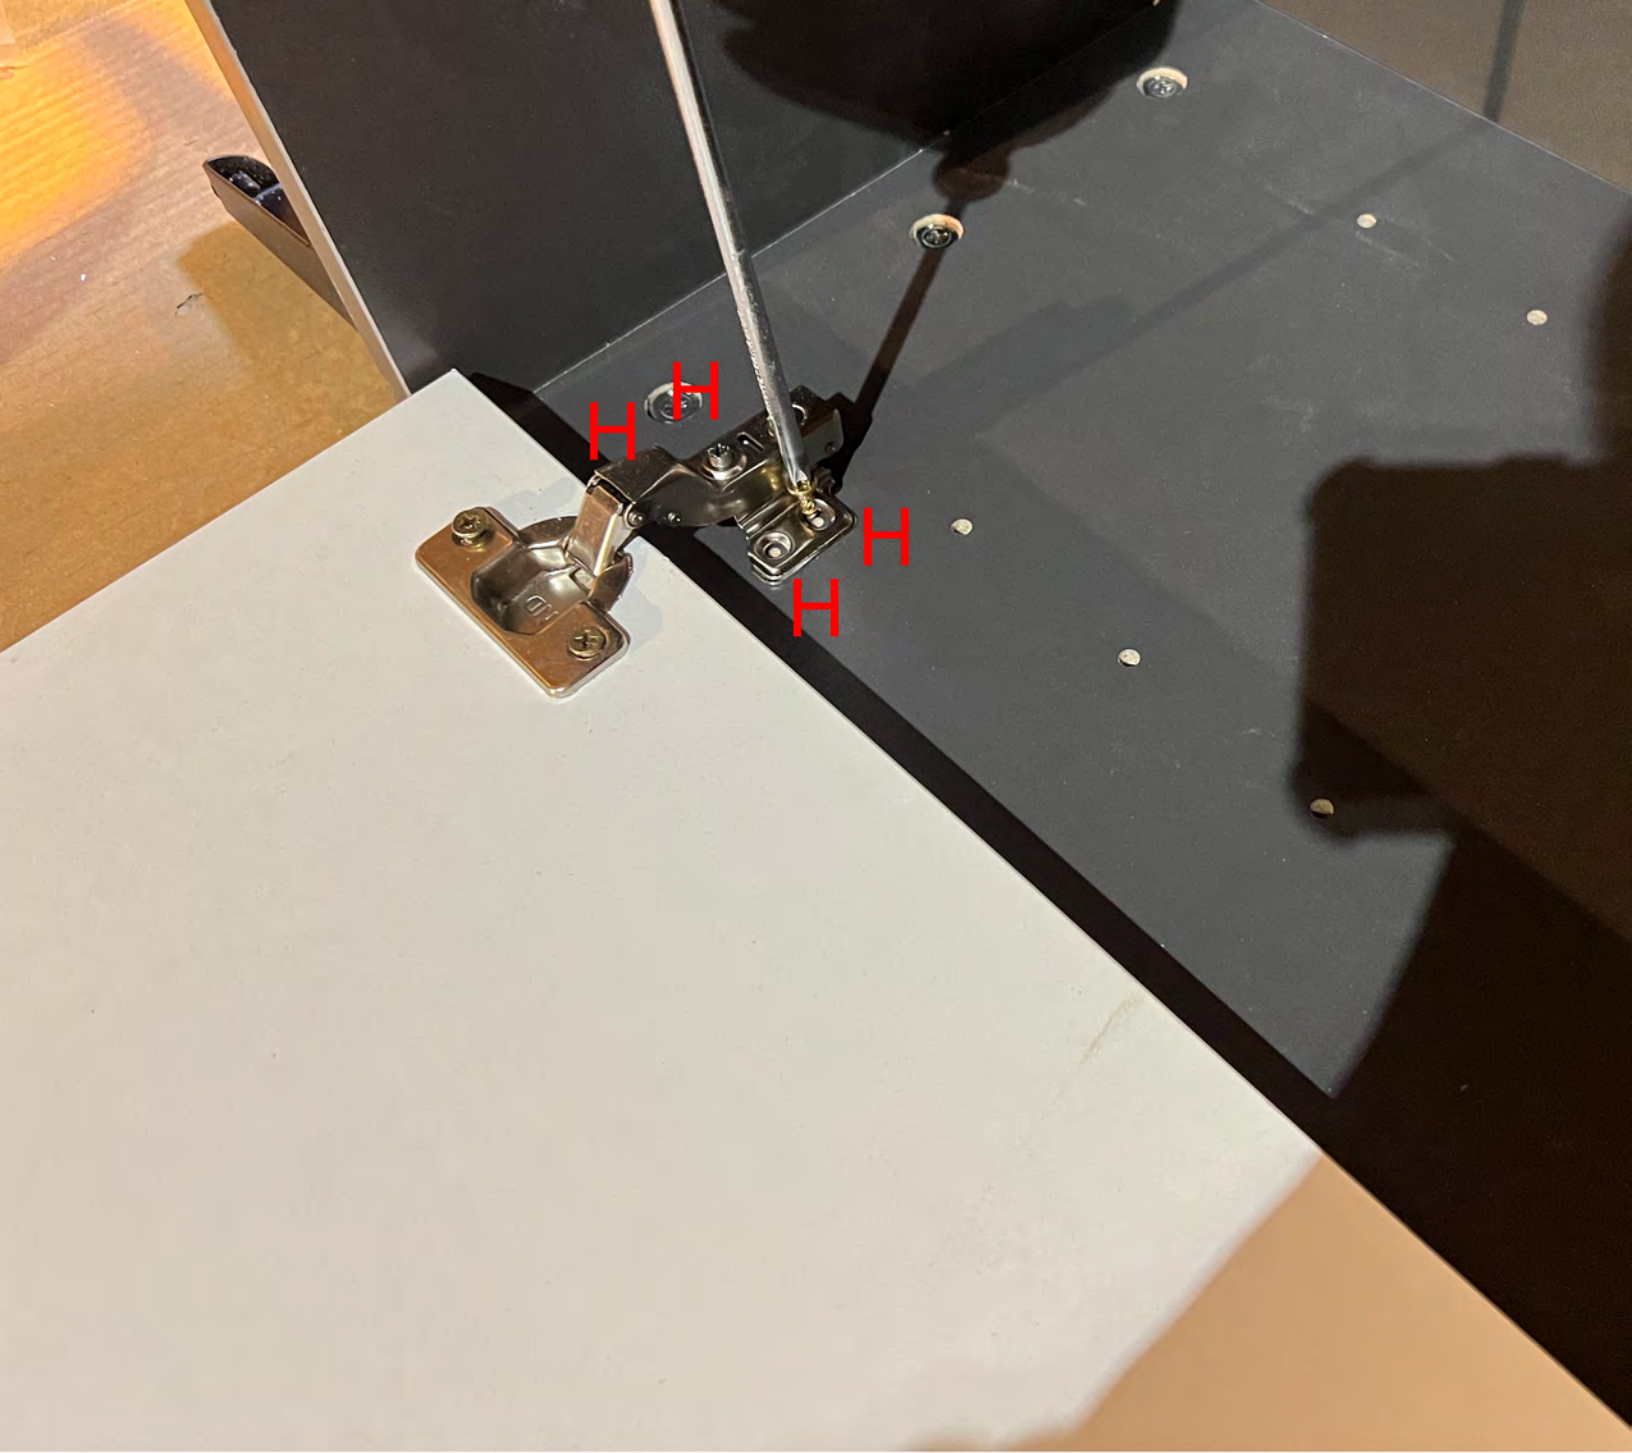


Line up the four holes on the hinge with the nearby holes on the side panel and attach it using H. You can adjust the door's height slightly—aim for even spacing rather than following the pre-drilled holes exactly.



Repeat this step until all door panels are installed.



Install part 8 as needed. Insert part I into the matching pre-drilled hole on the appropriate side panel.

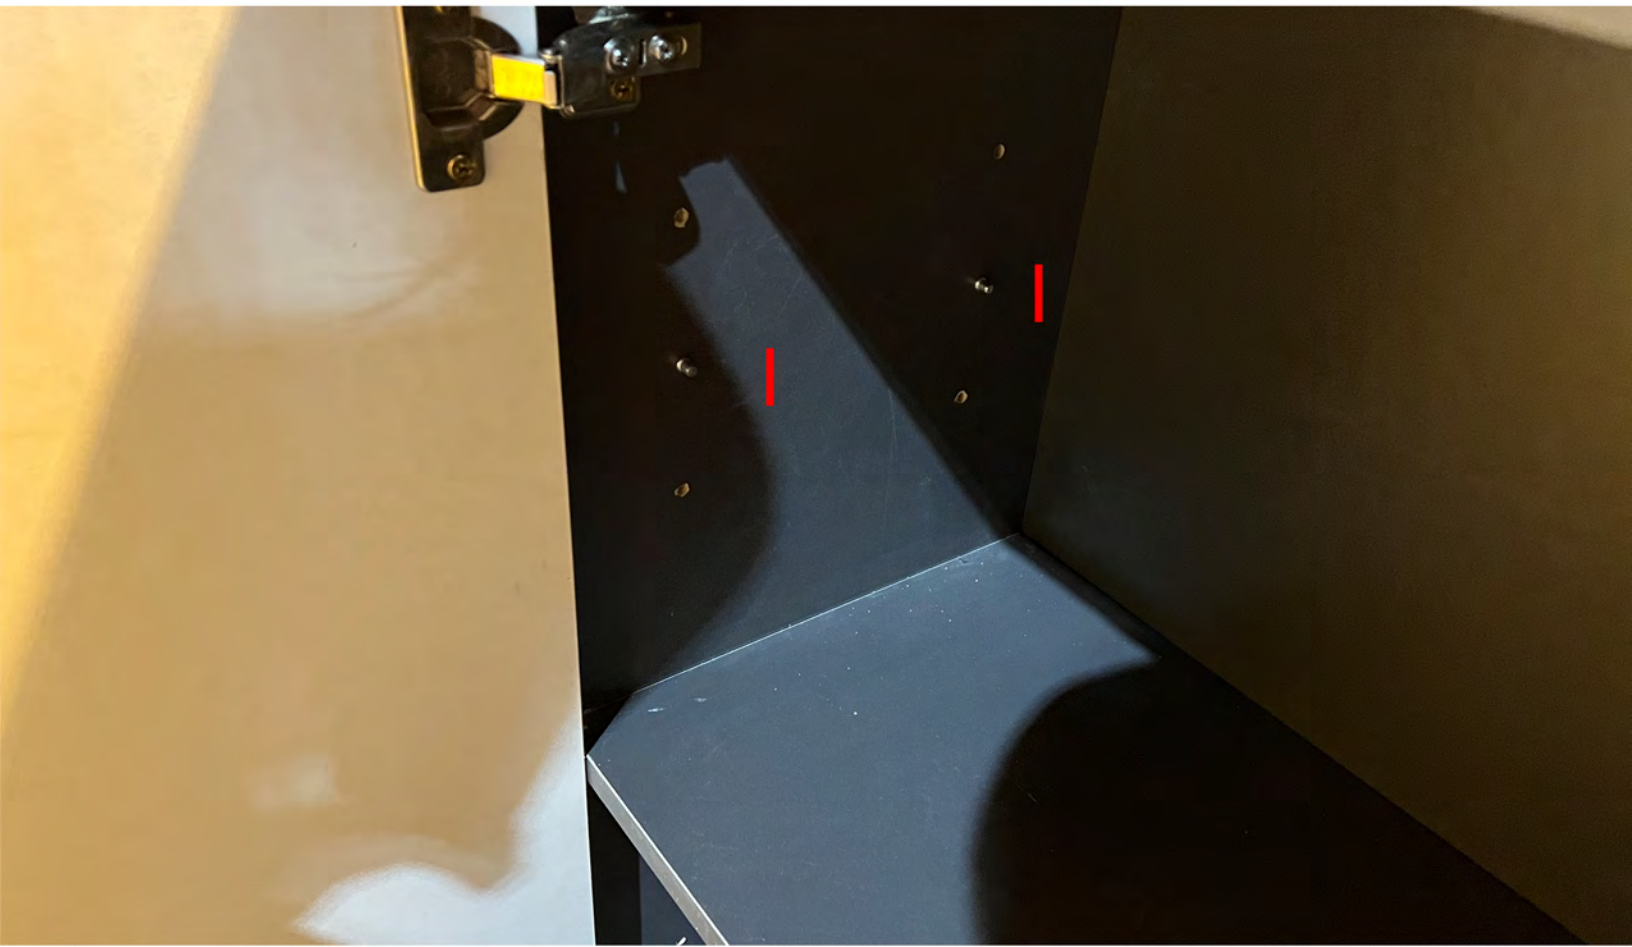



Place the shelves into position to complete the installation.



Installation Complete