

CC025 2Doors Installation Instruction

Please be sure to use a manual screwdriver and refrain from using an electric drill.




Hardware Accessories


CAUTION



TWO PERSONS LIFT & INSTALLATION


Important: This product is oversized and heavy. For safe assembly and to avoid damage, at least two people are required. When flipping or moving the item, always lift carefully. Never drag, drop, or handle it roughly.

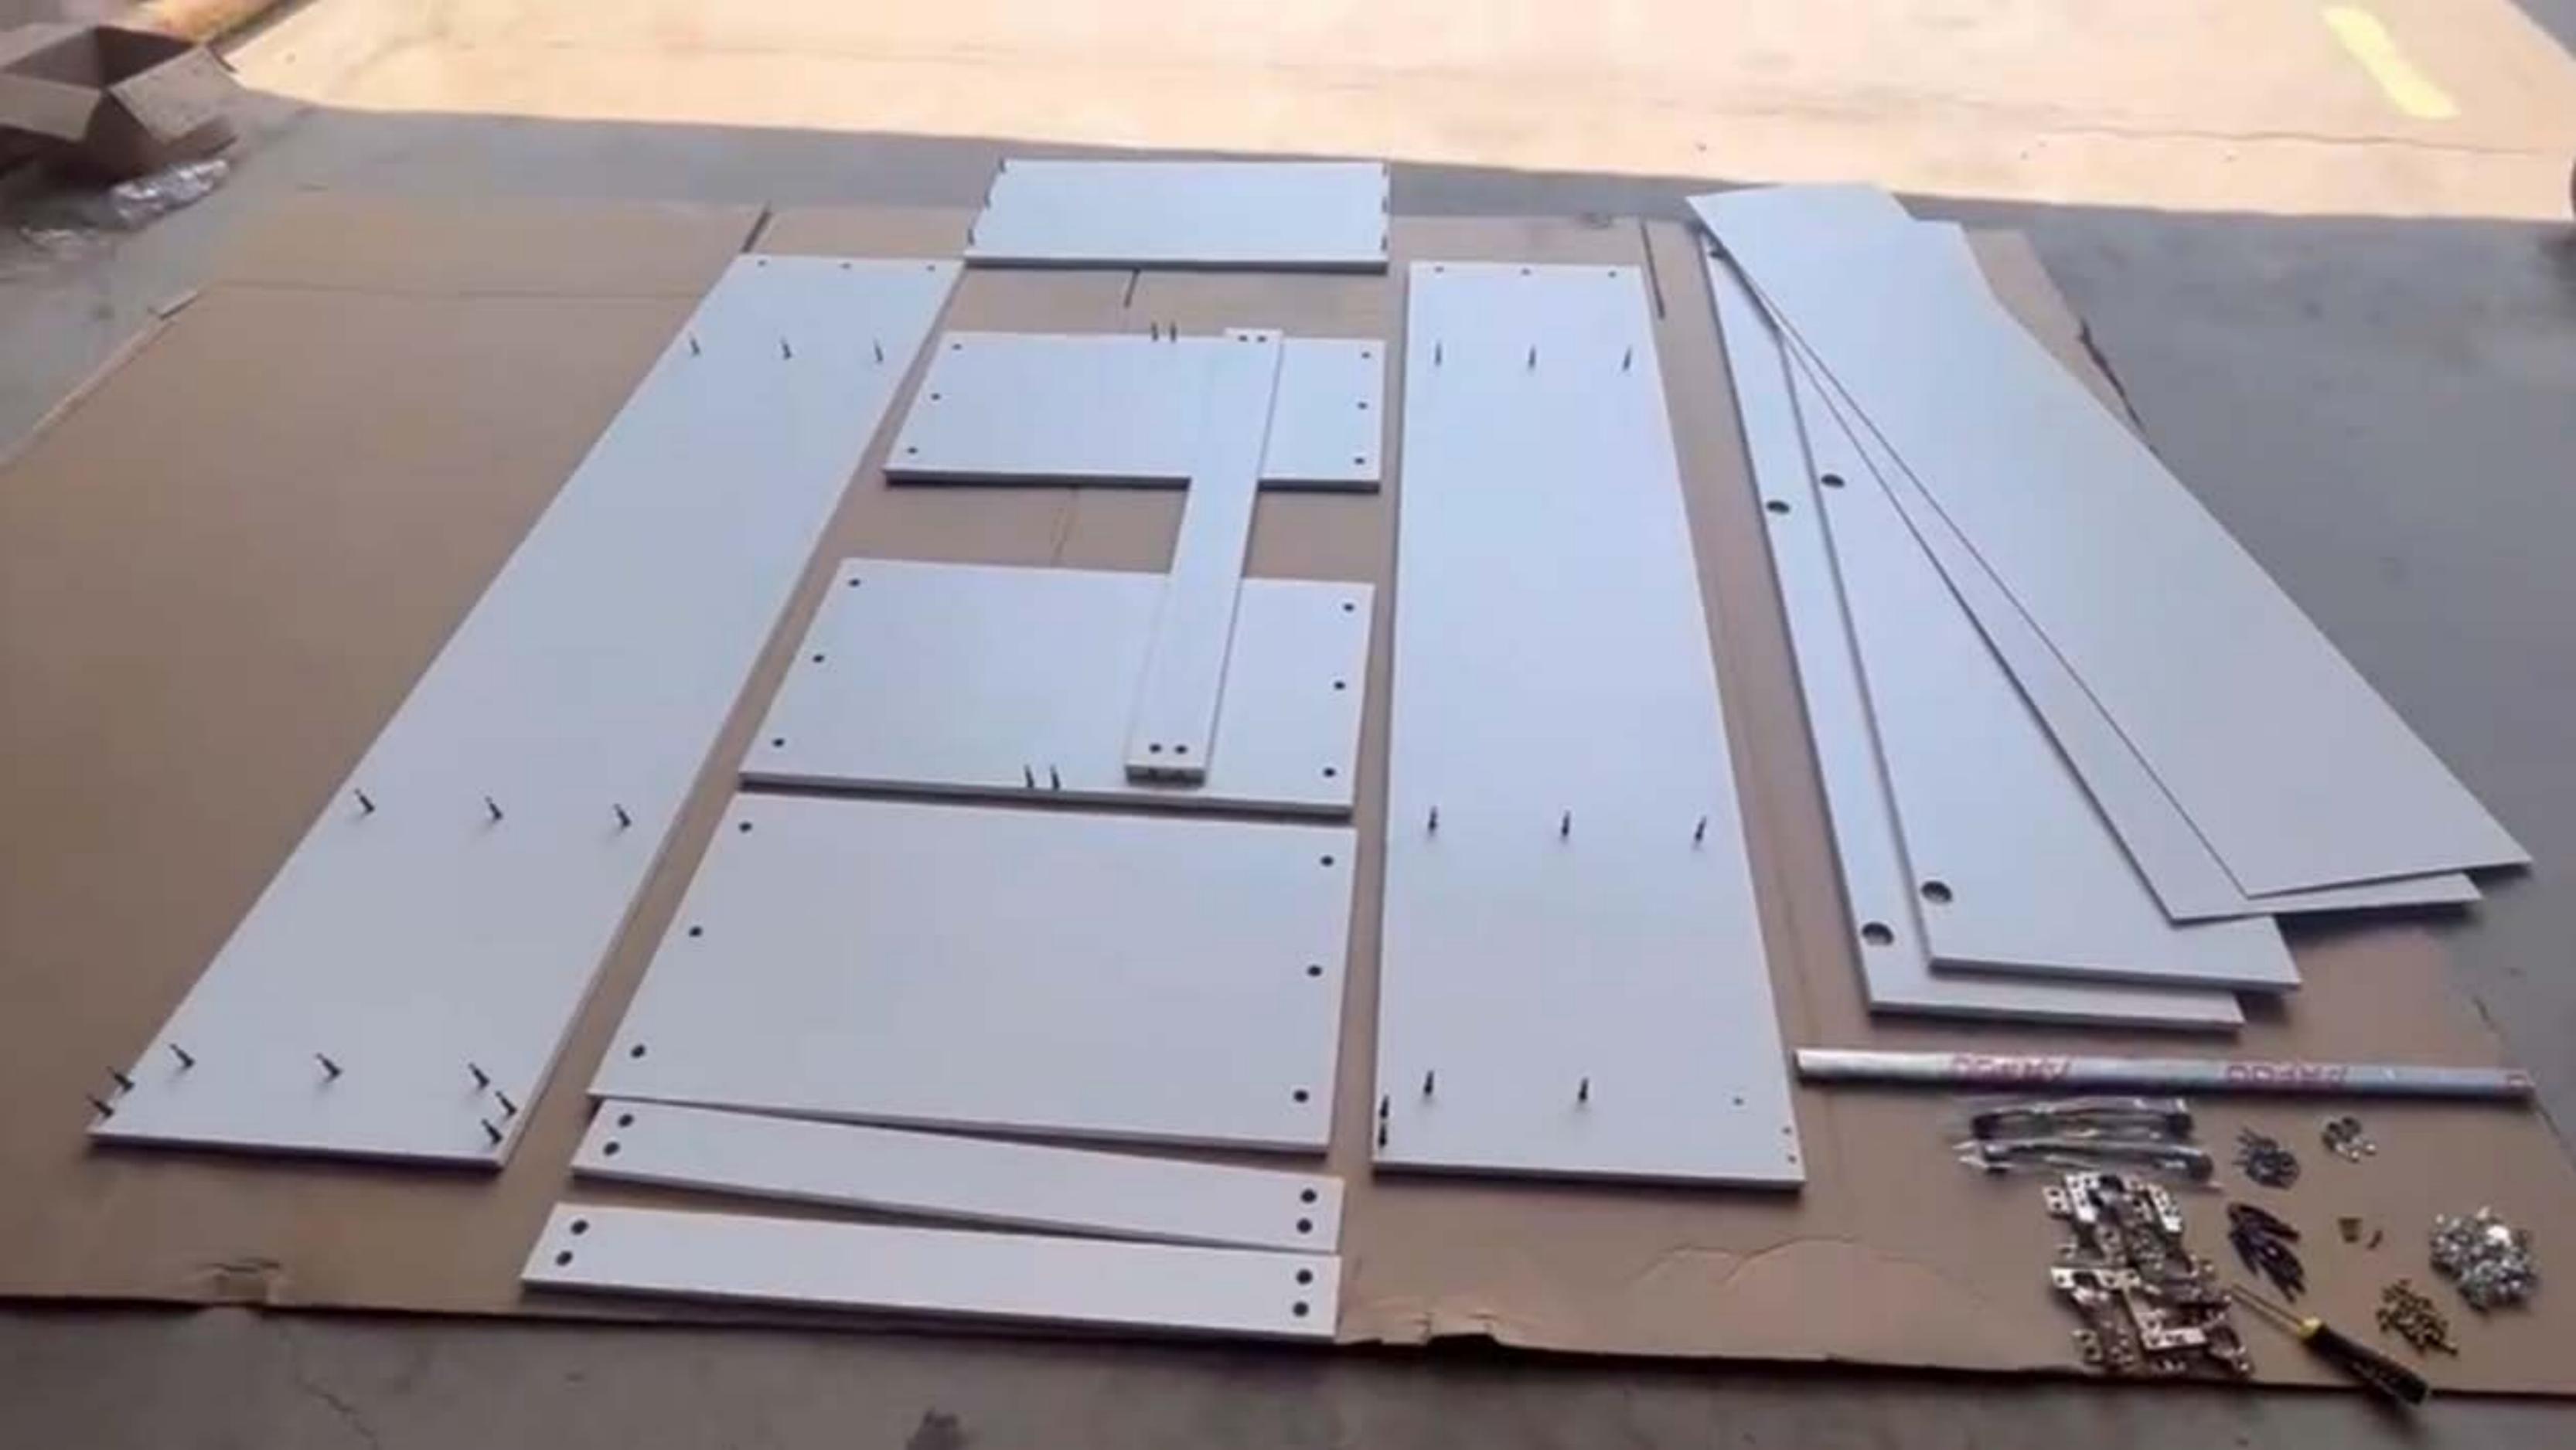

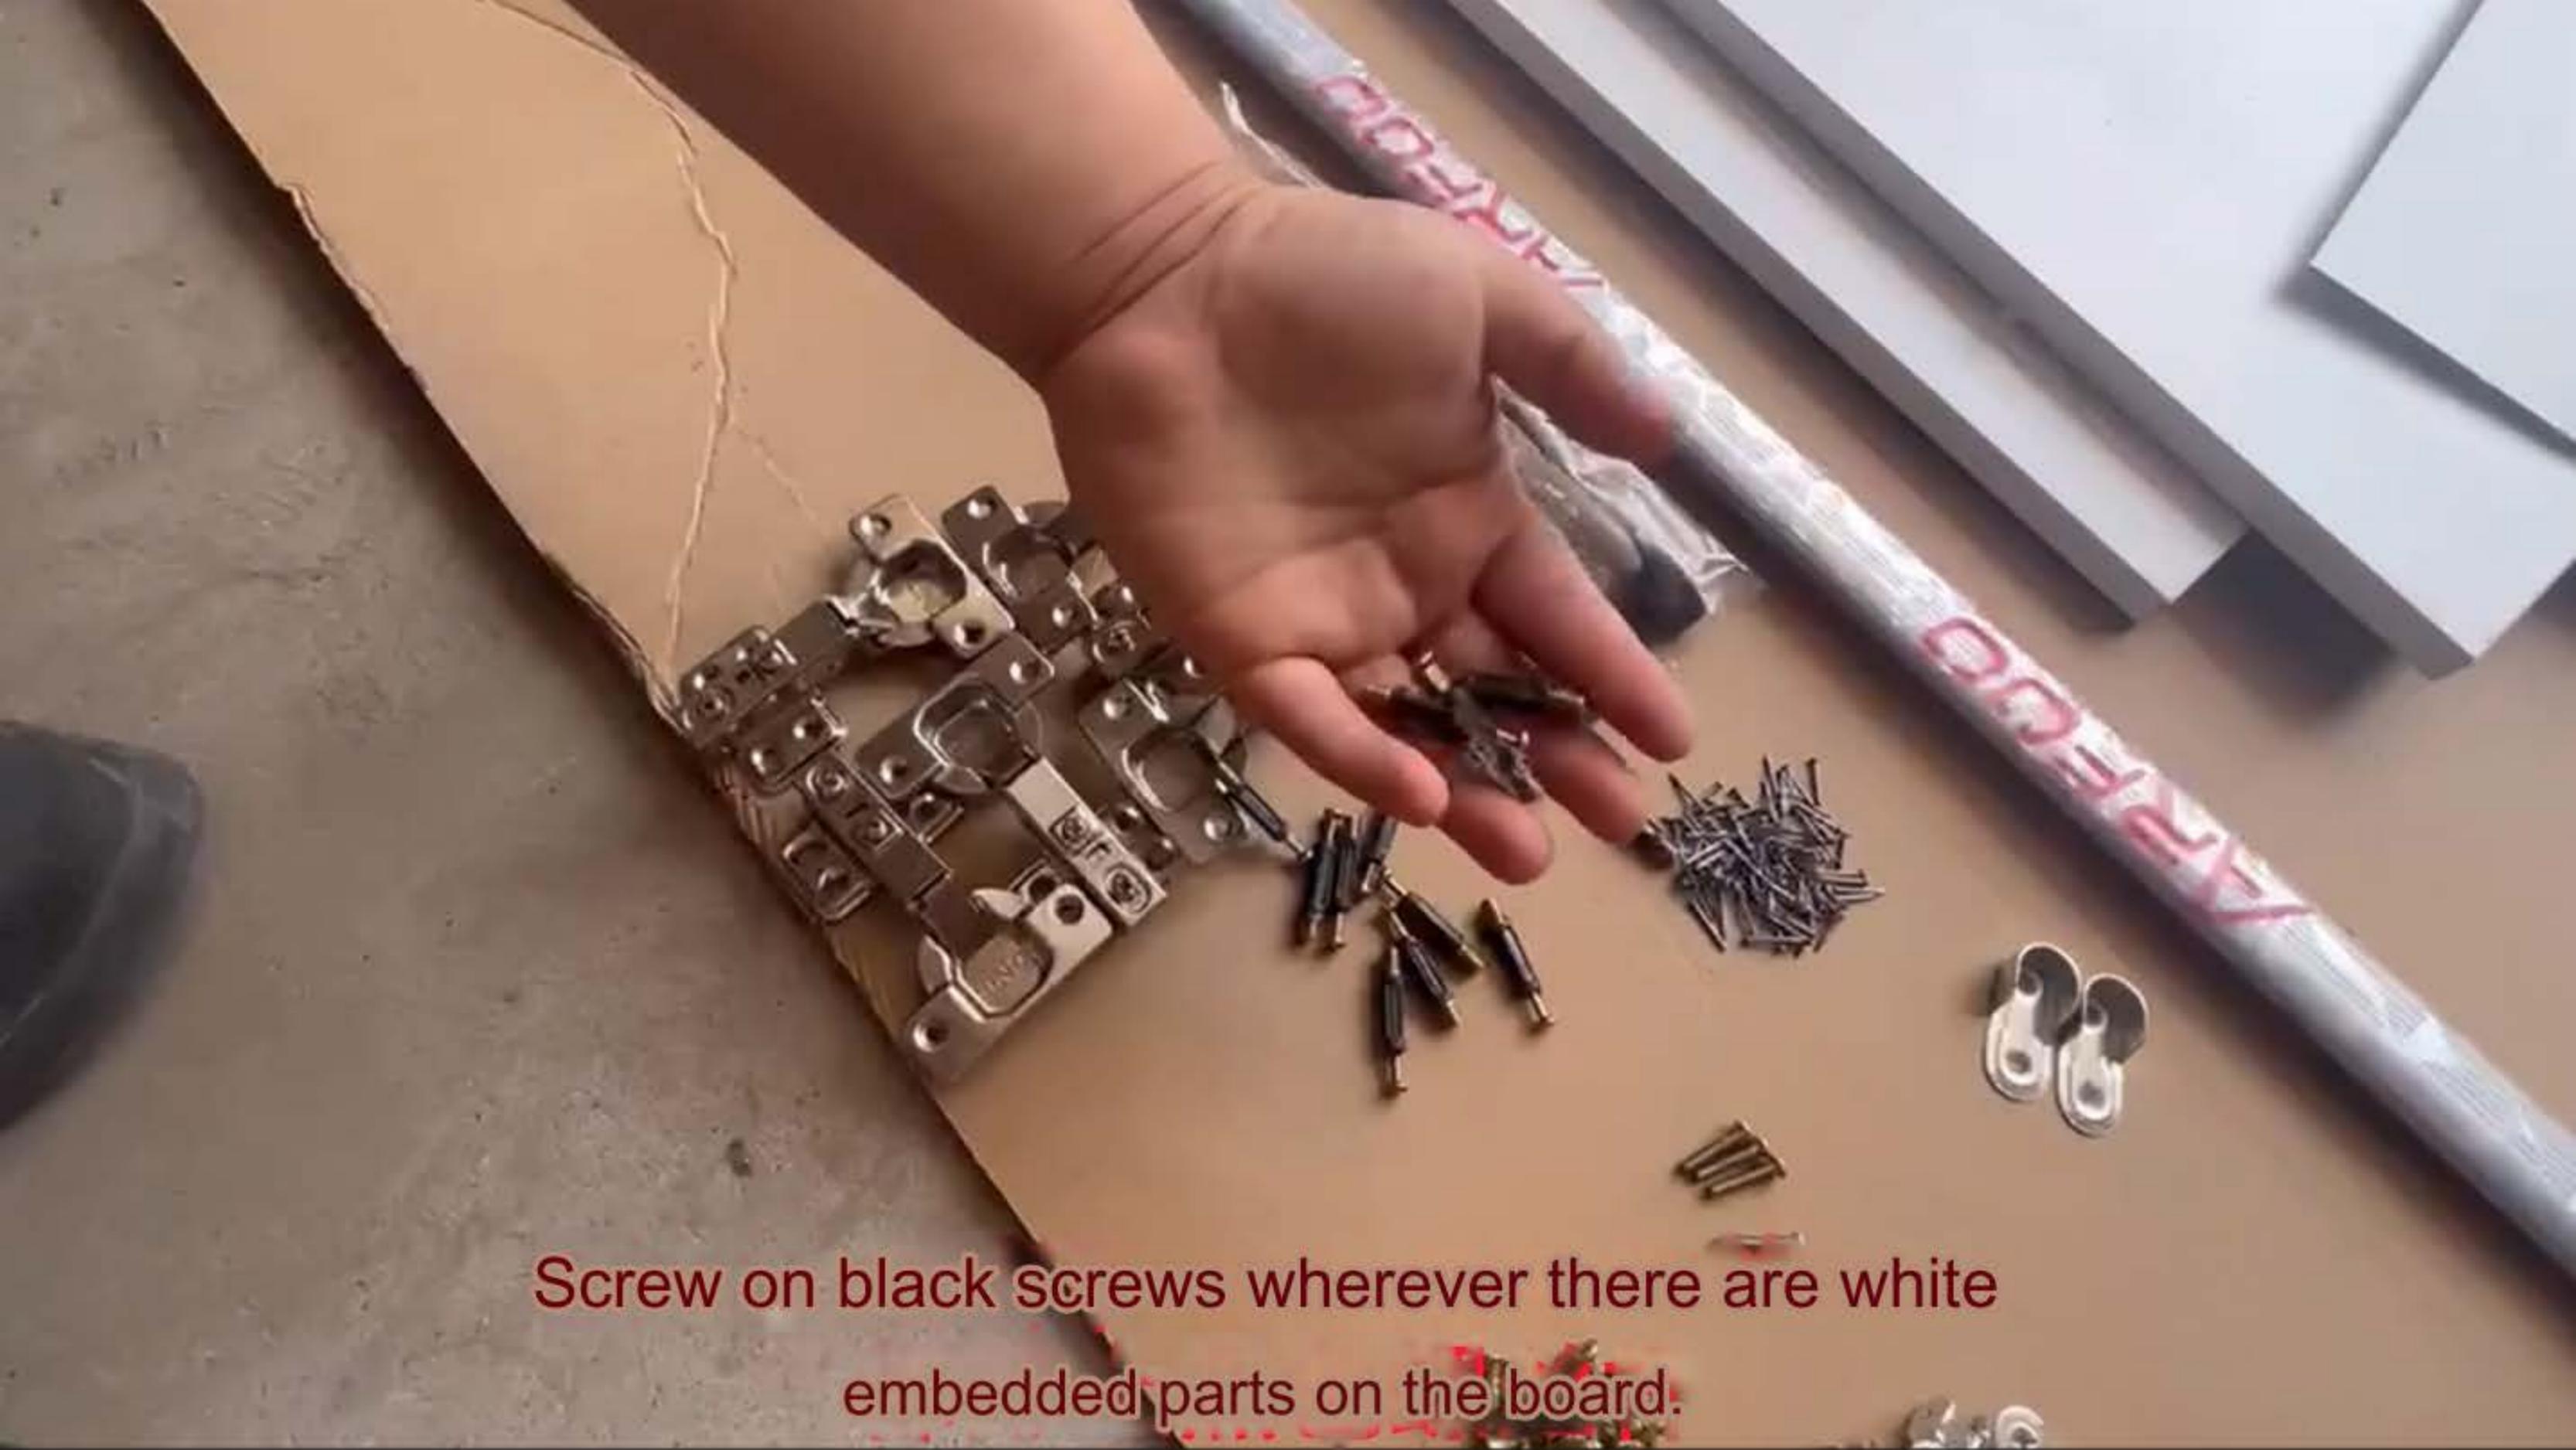A hand is shown holding several black screws. Below the hand, a metal terminal block is visible on a cardboard surface. The terminal block has several white embedded parts. To the right of the terminal block, there is a pile of small metal pins and two metal clips. The background shows a cardboard box with some pink markings.

Screw on black screws wherever there are white embedded parts on the board.



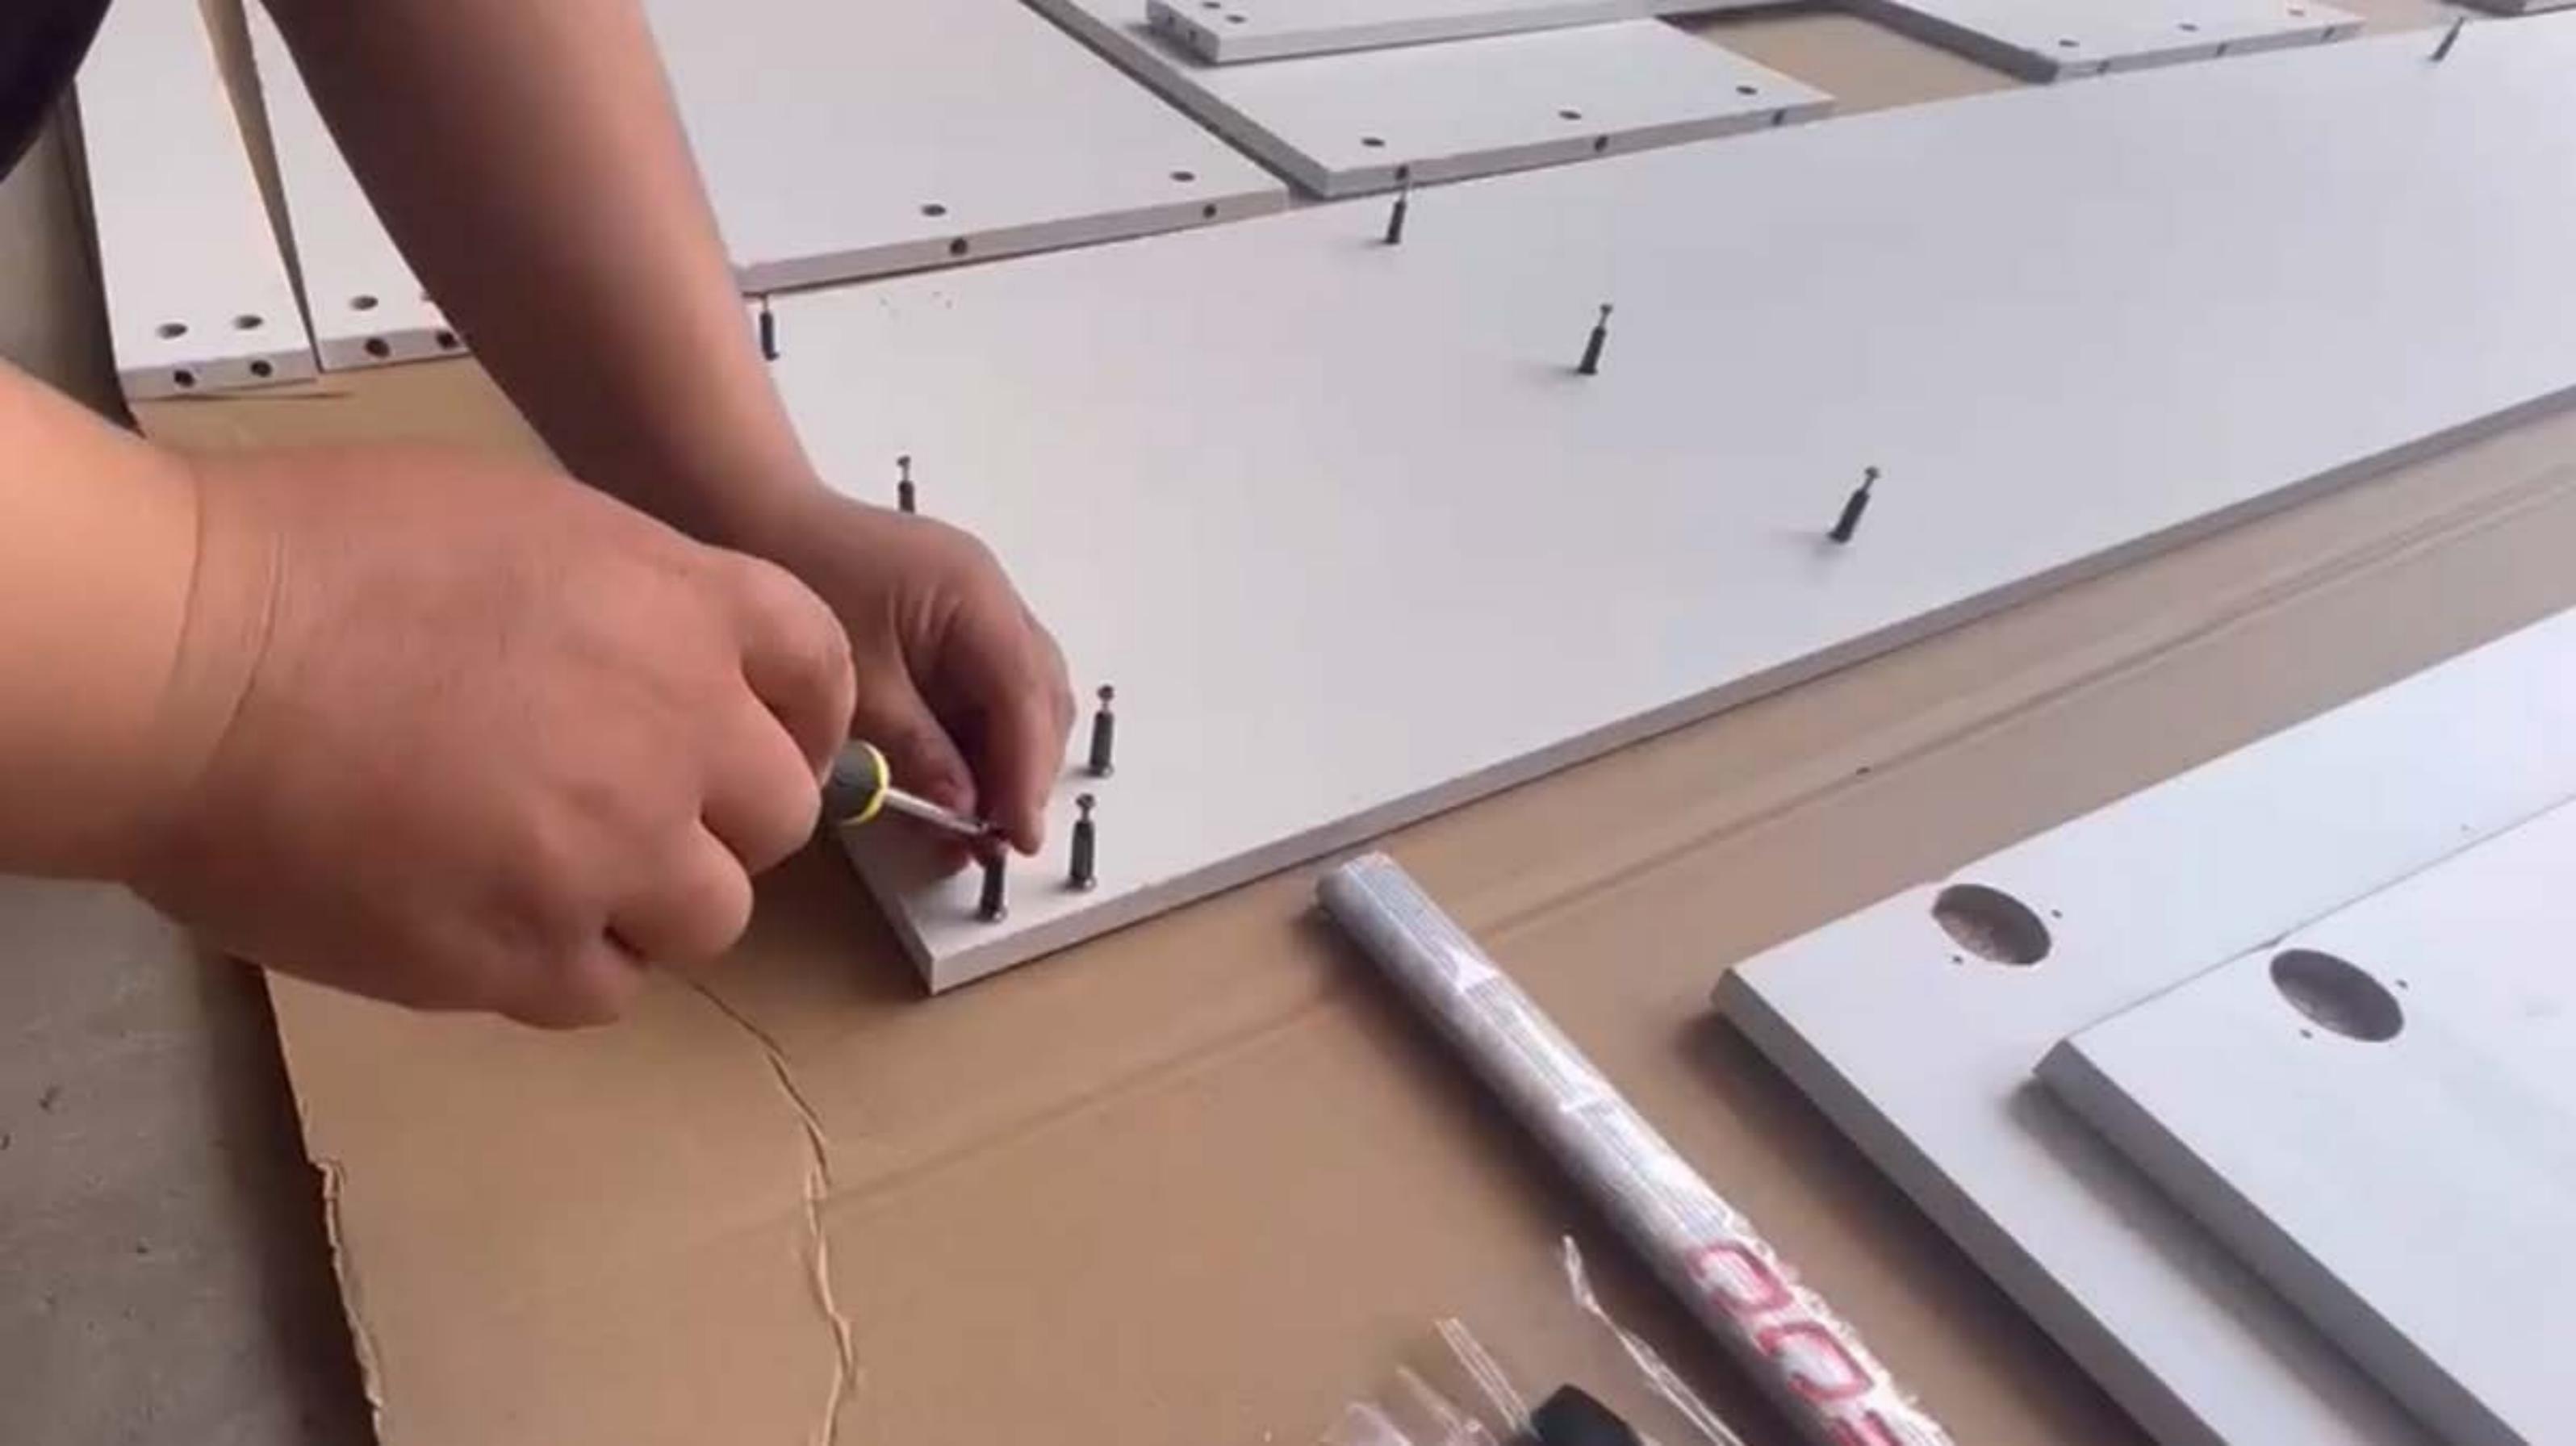



Splice the panels in sequence














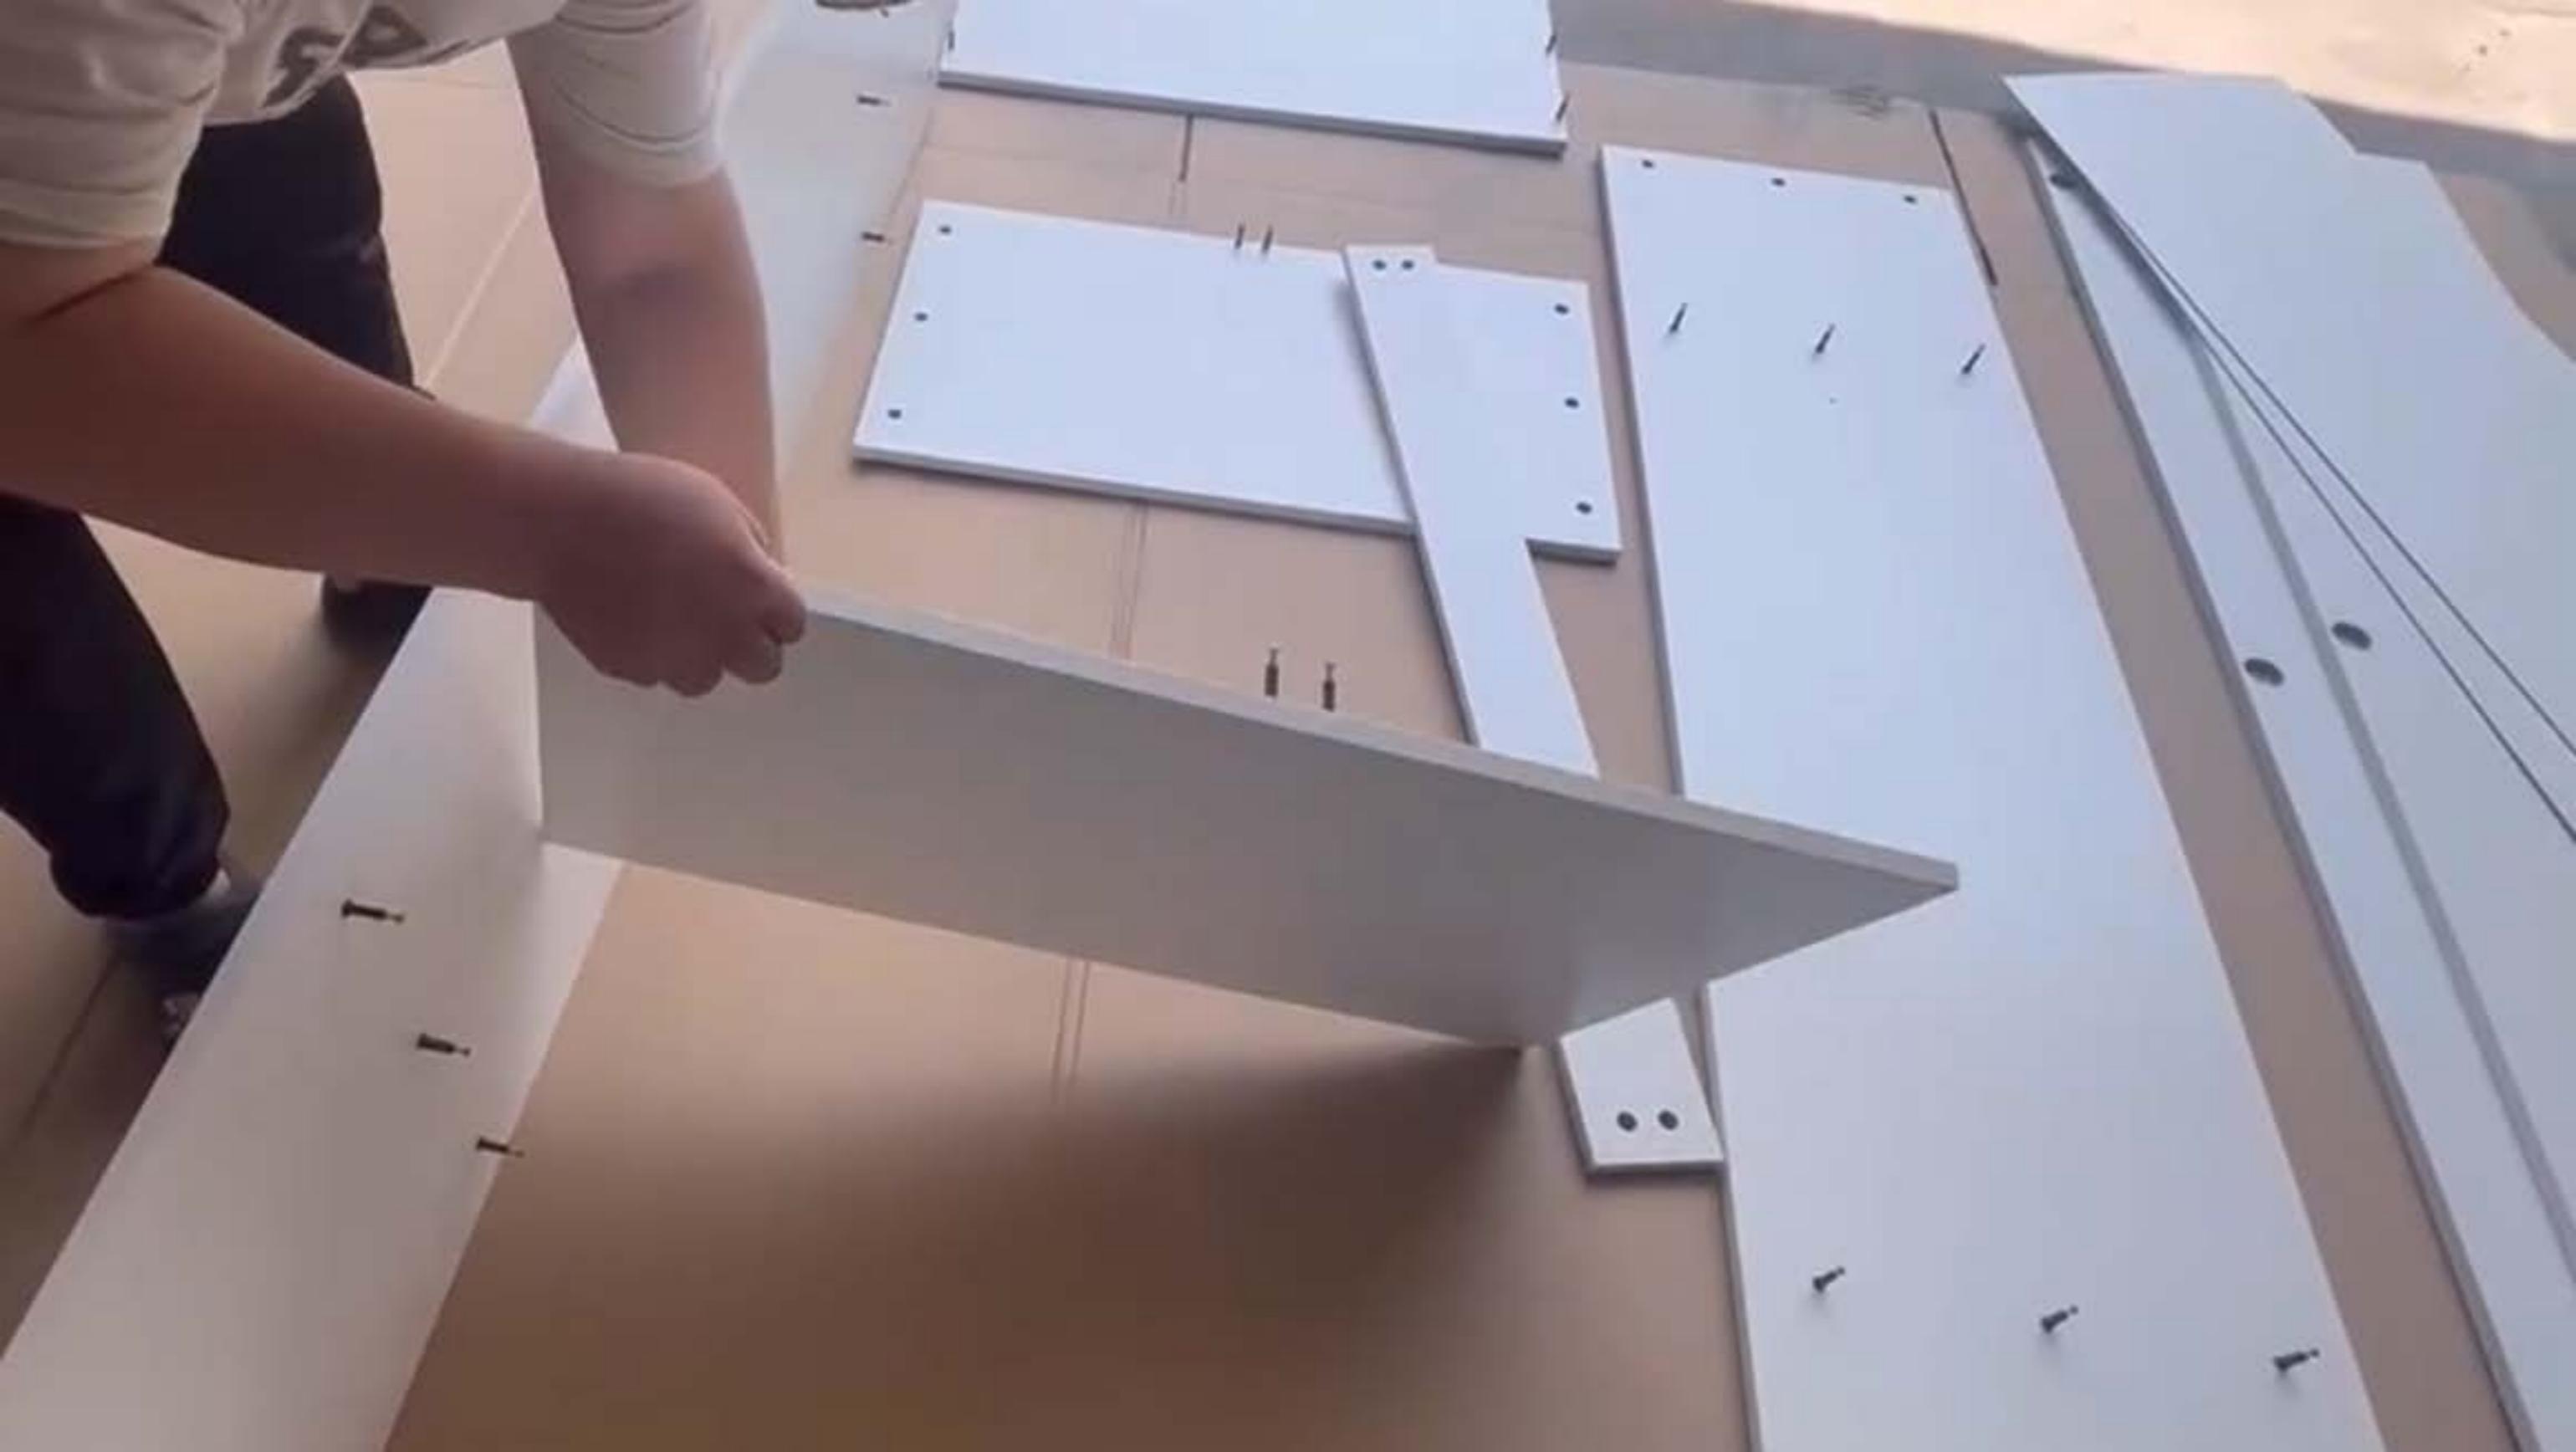




















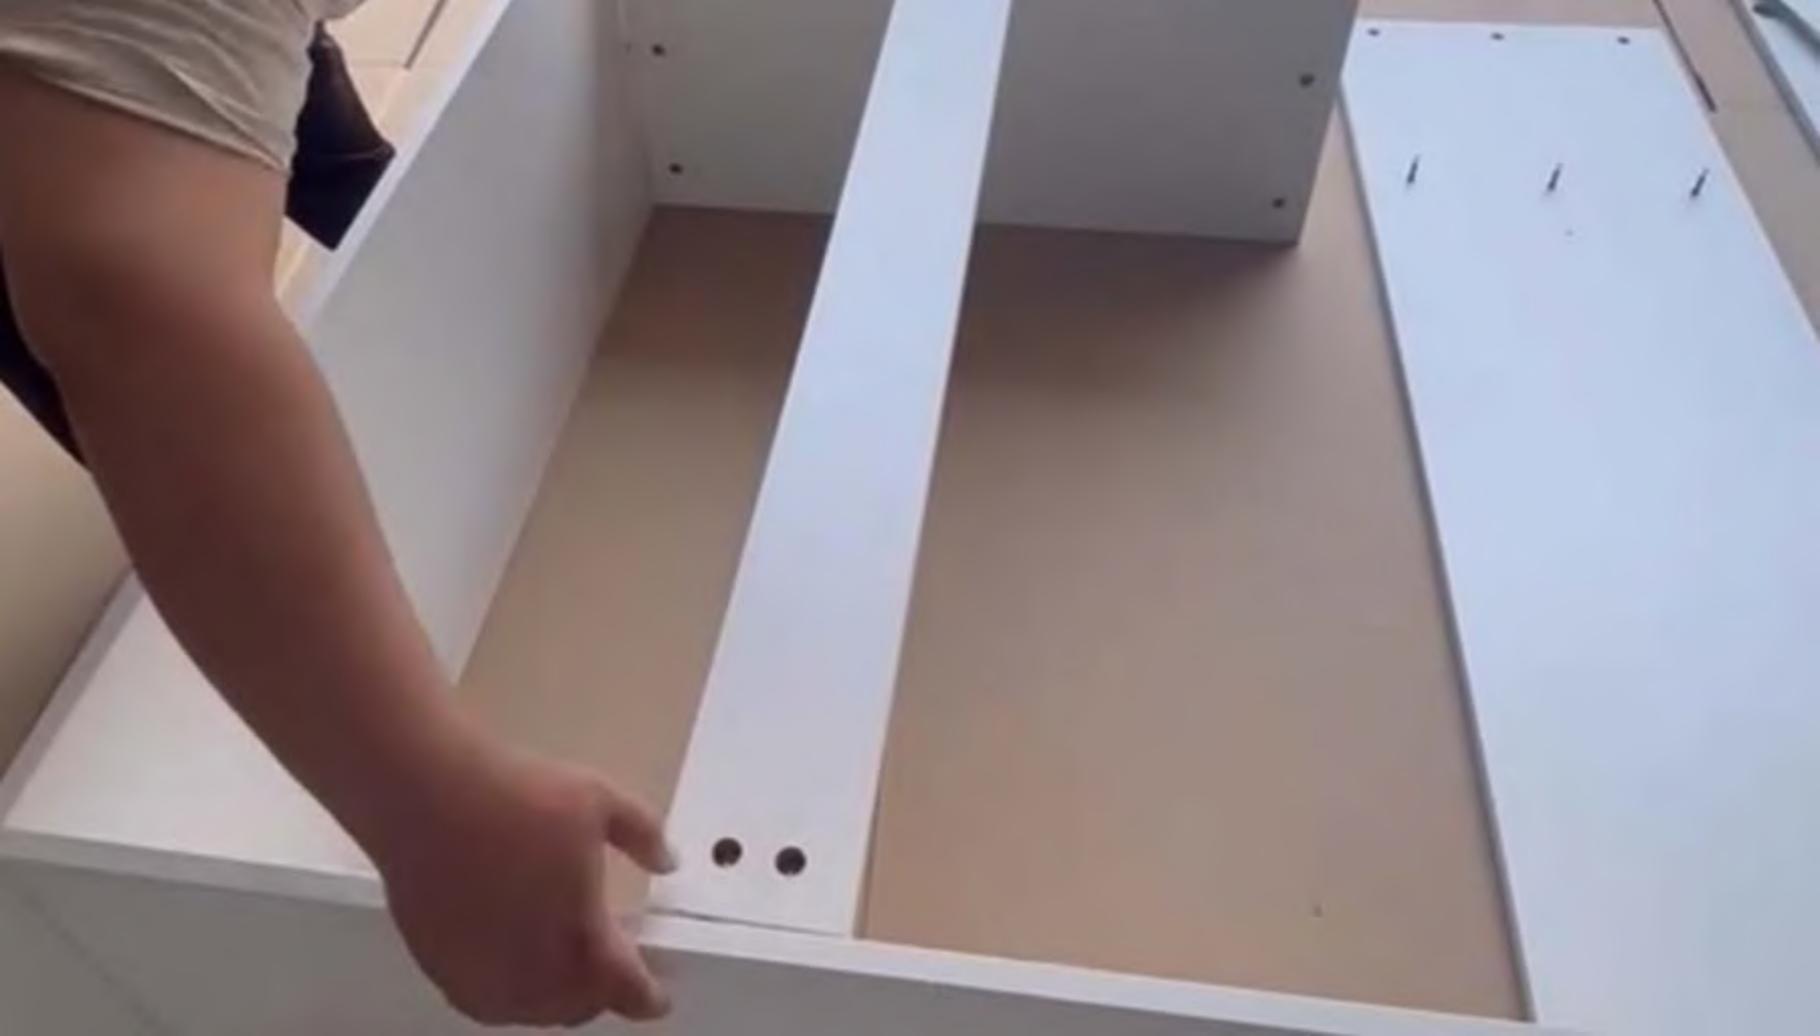














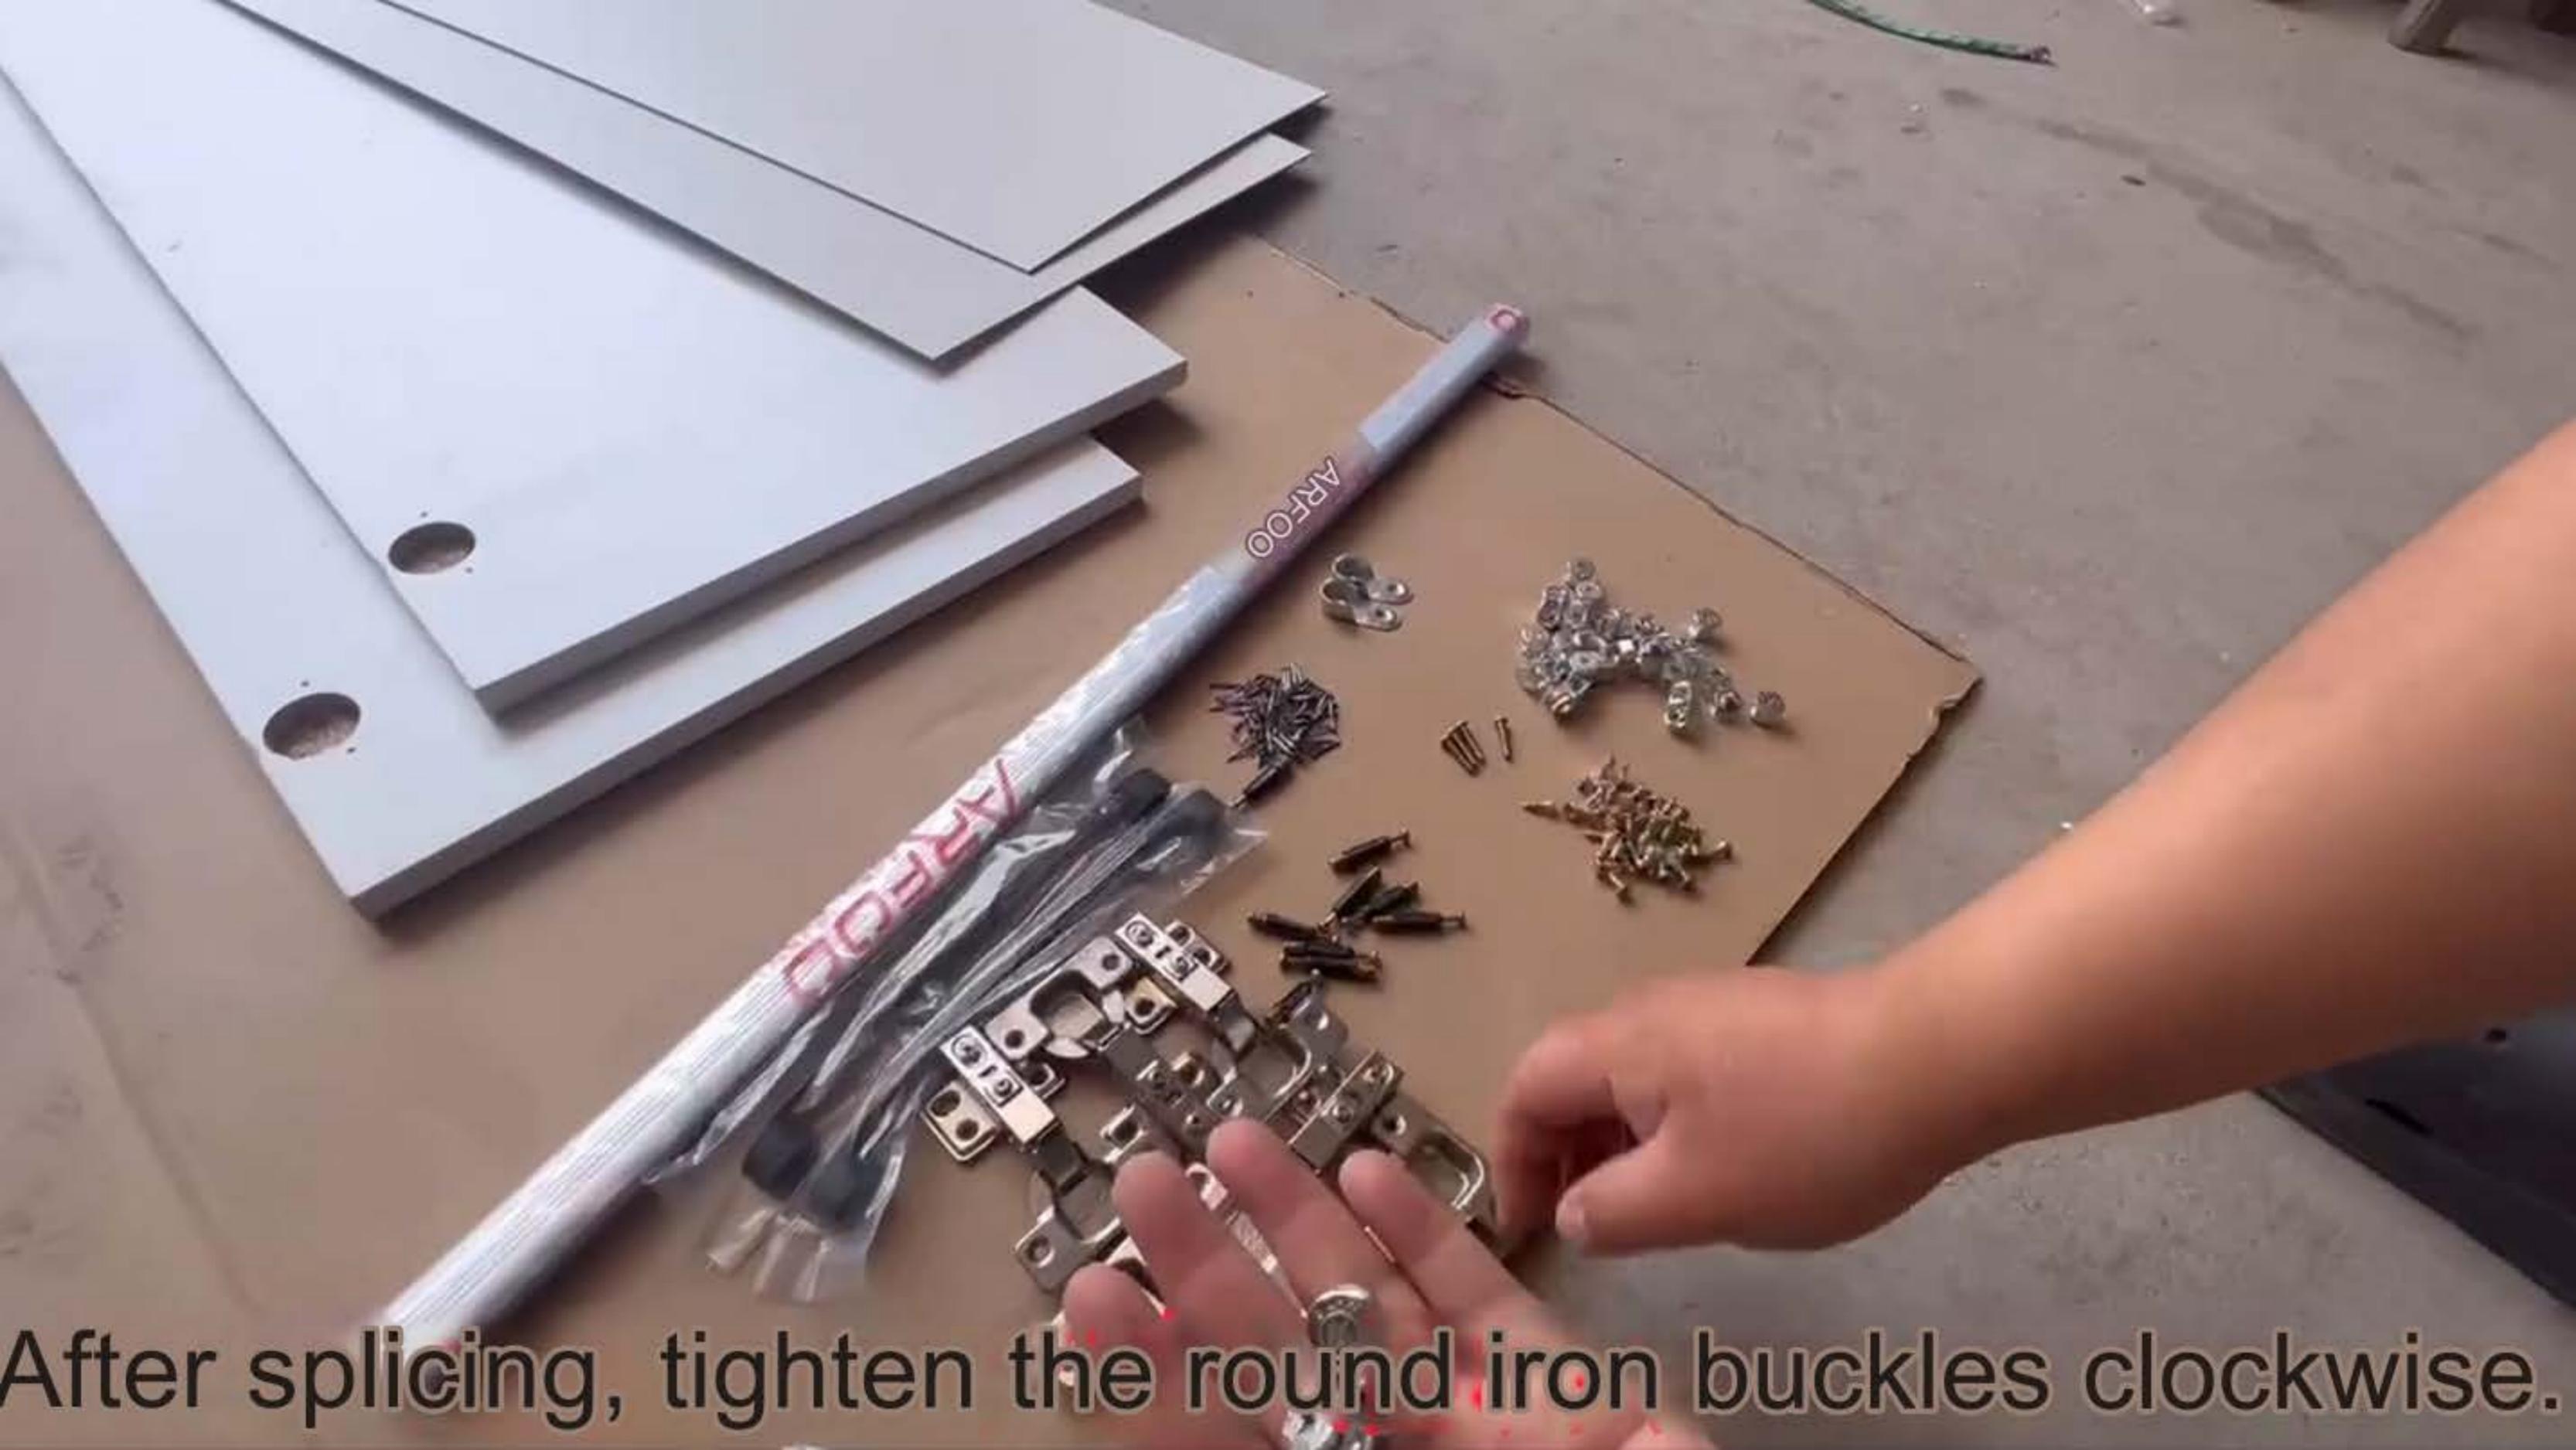

After splicing, tighten the round iron buckles clockwise.























Use a ruler to measure the diagonal distance and keep both sides almost the same




Use a ruler to measure the diagonal distance and keep both sides almost the same



Cover with a thin backing plate facing the sky




Cover the thin back plate and align

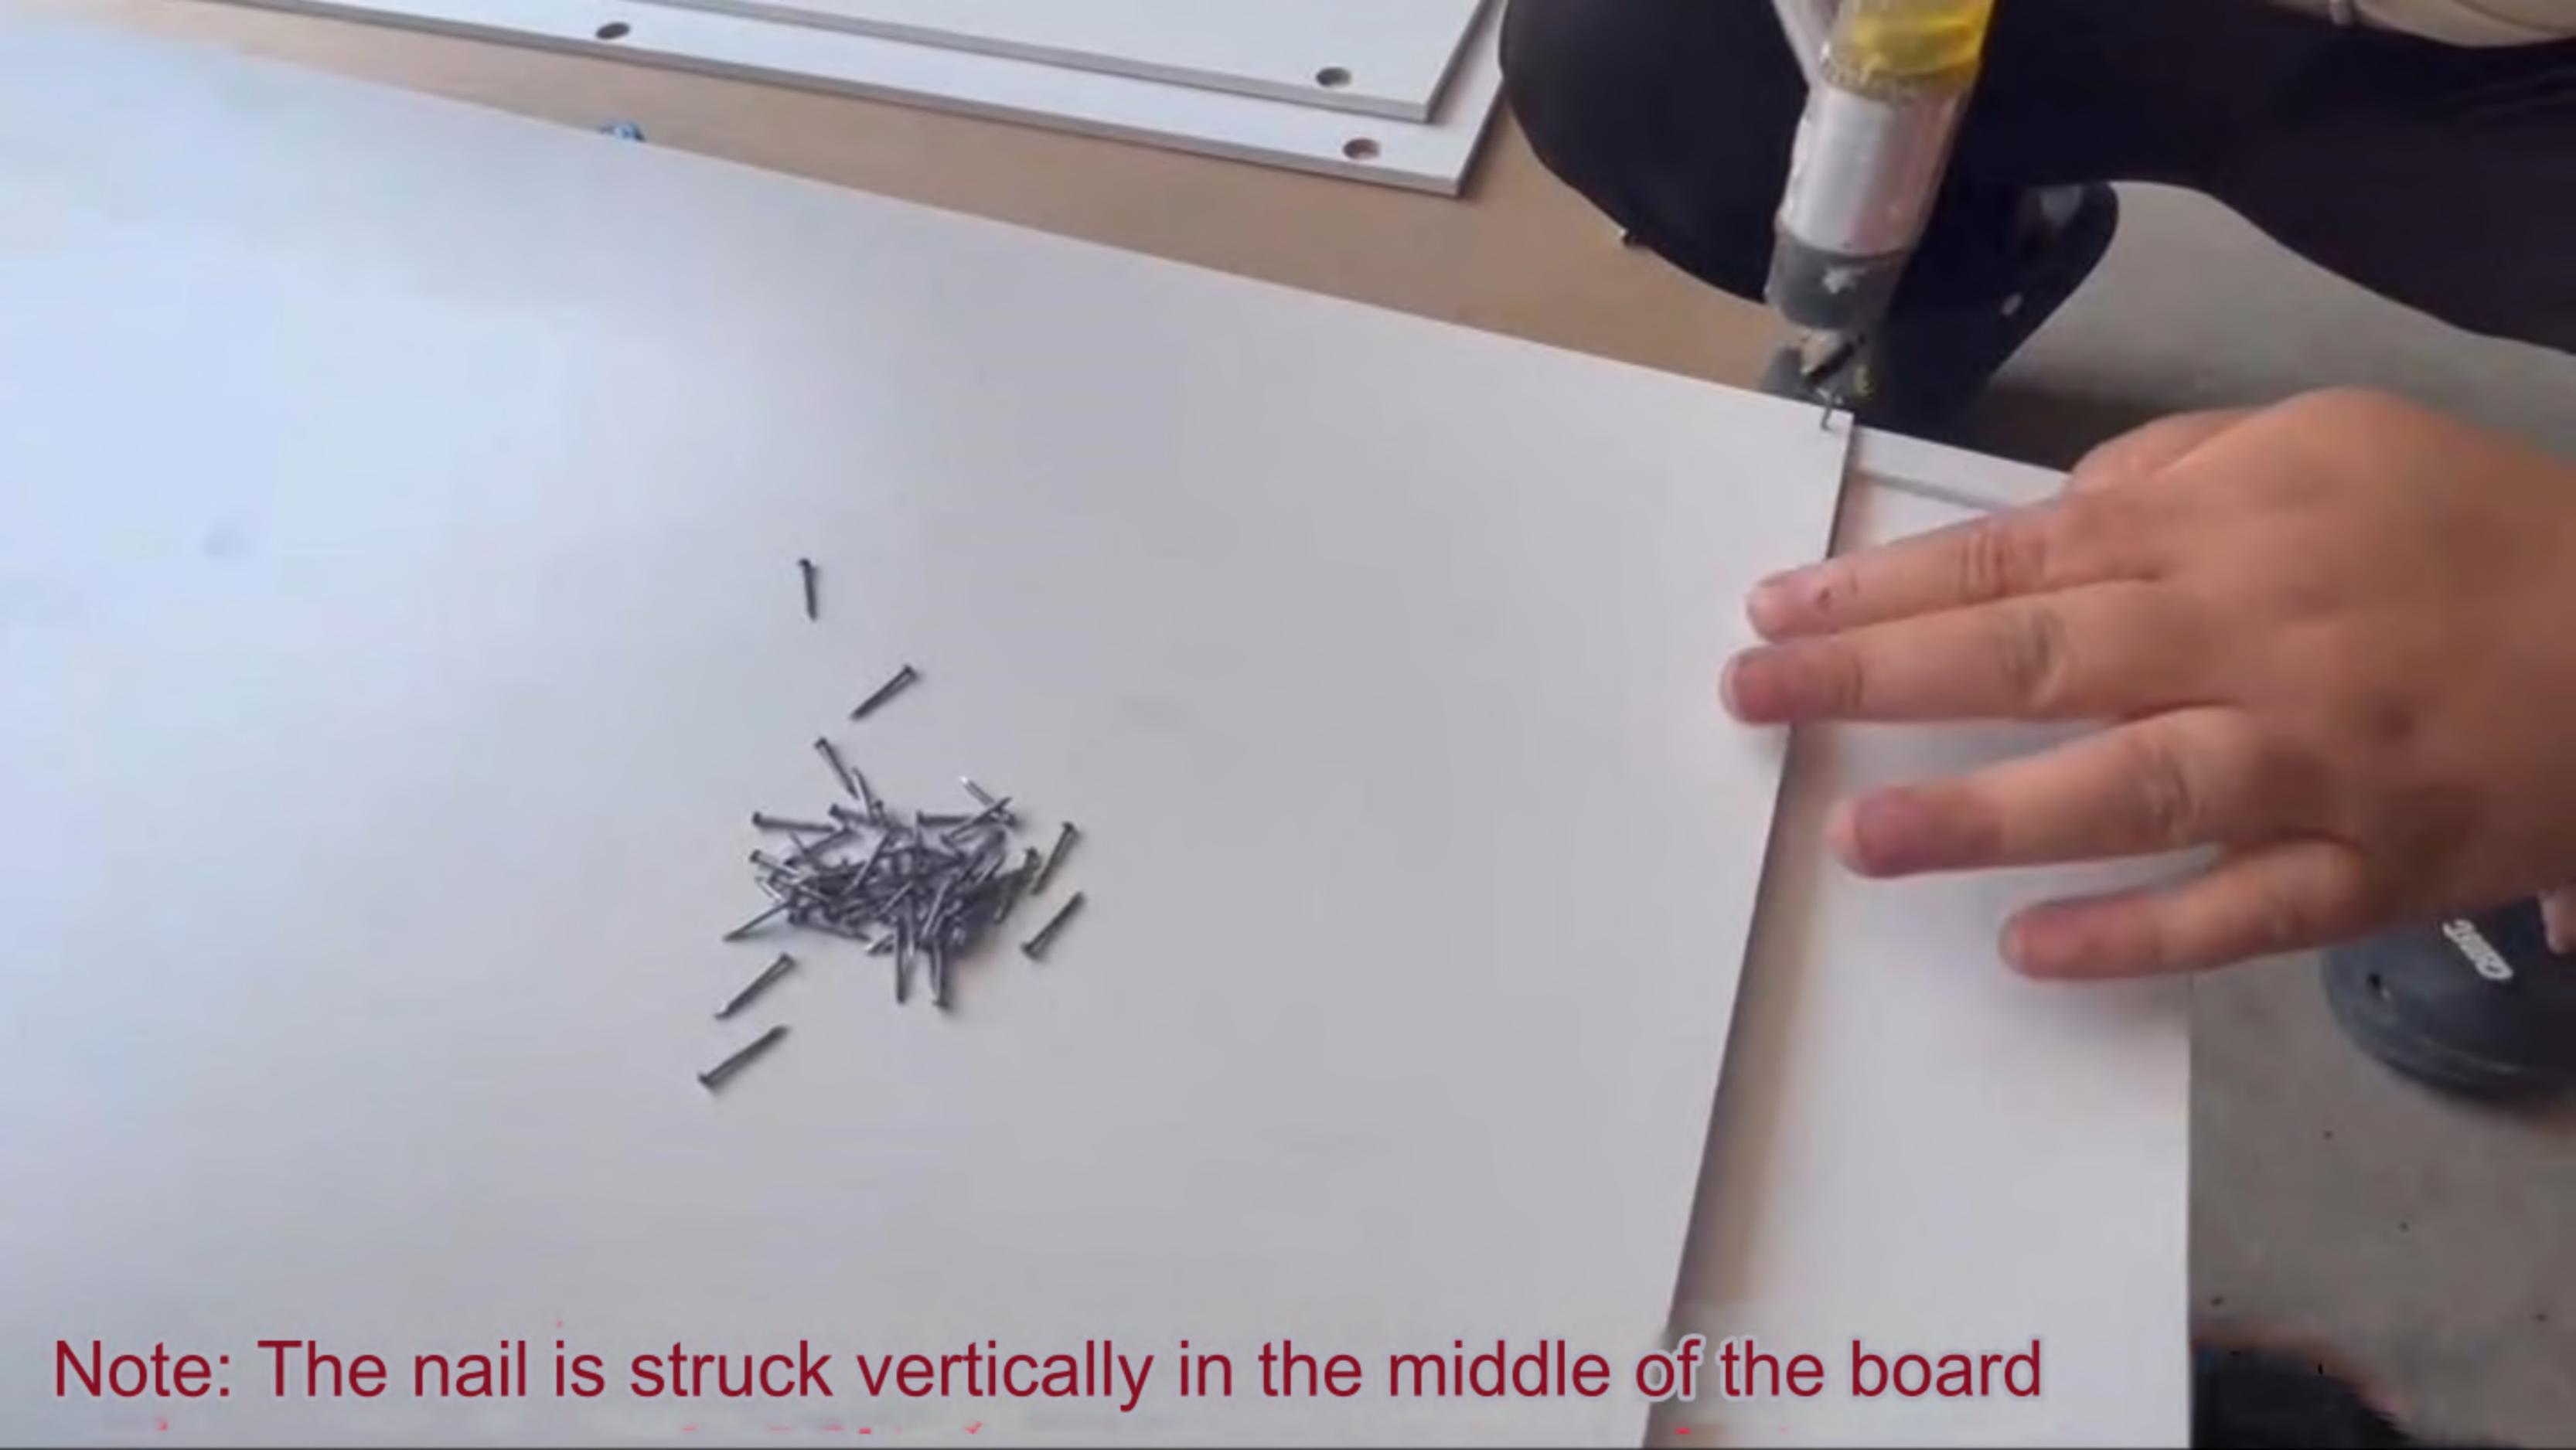


Note: The nail is struck vertically in the middle of the board



Use a small hammer to hammer the backing nails into the board

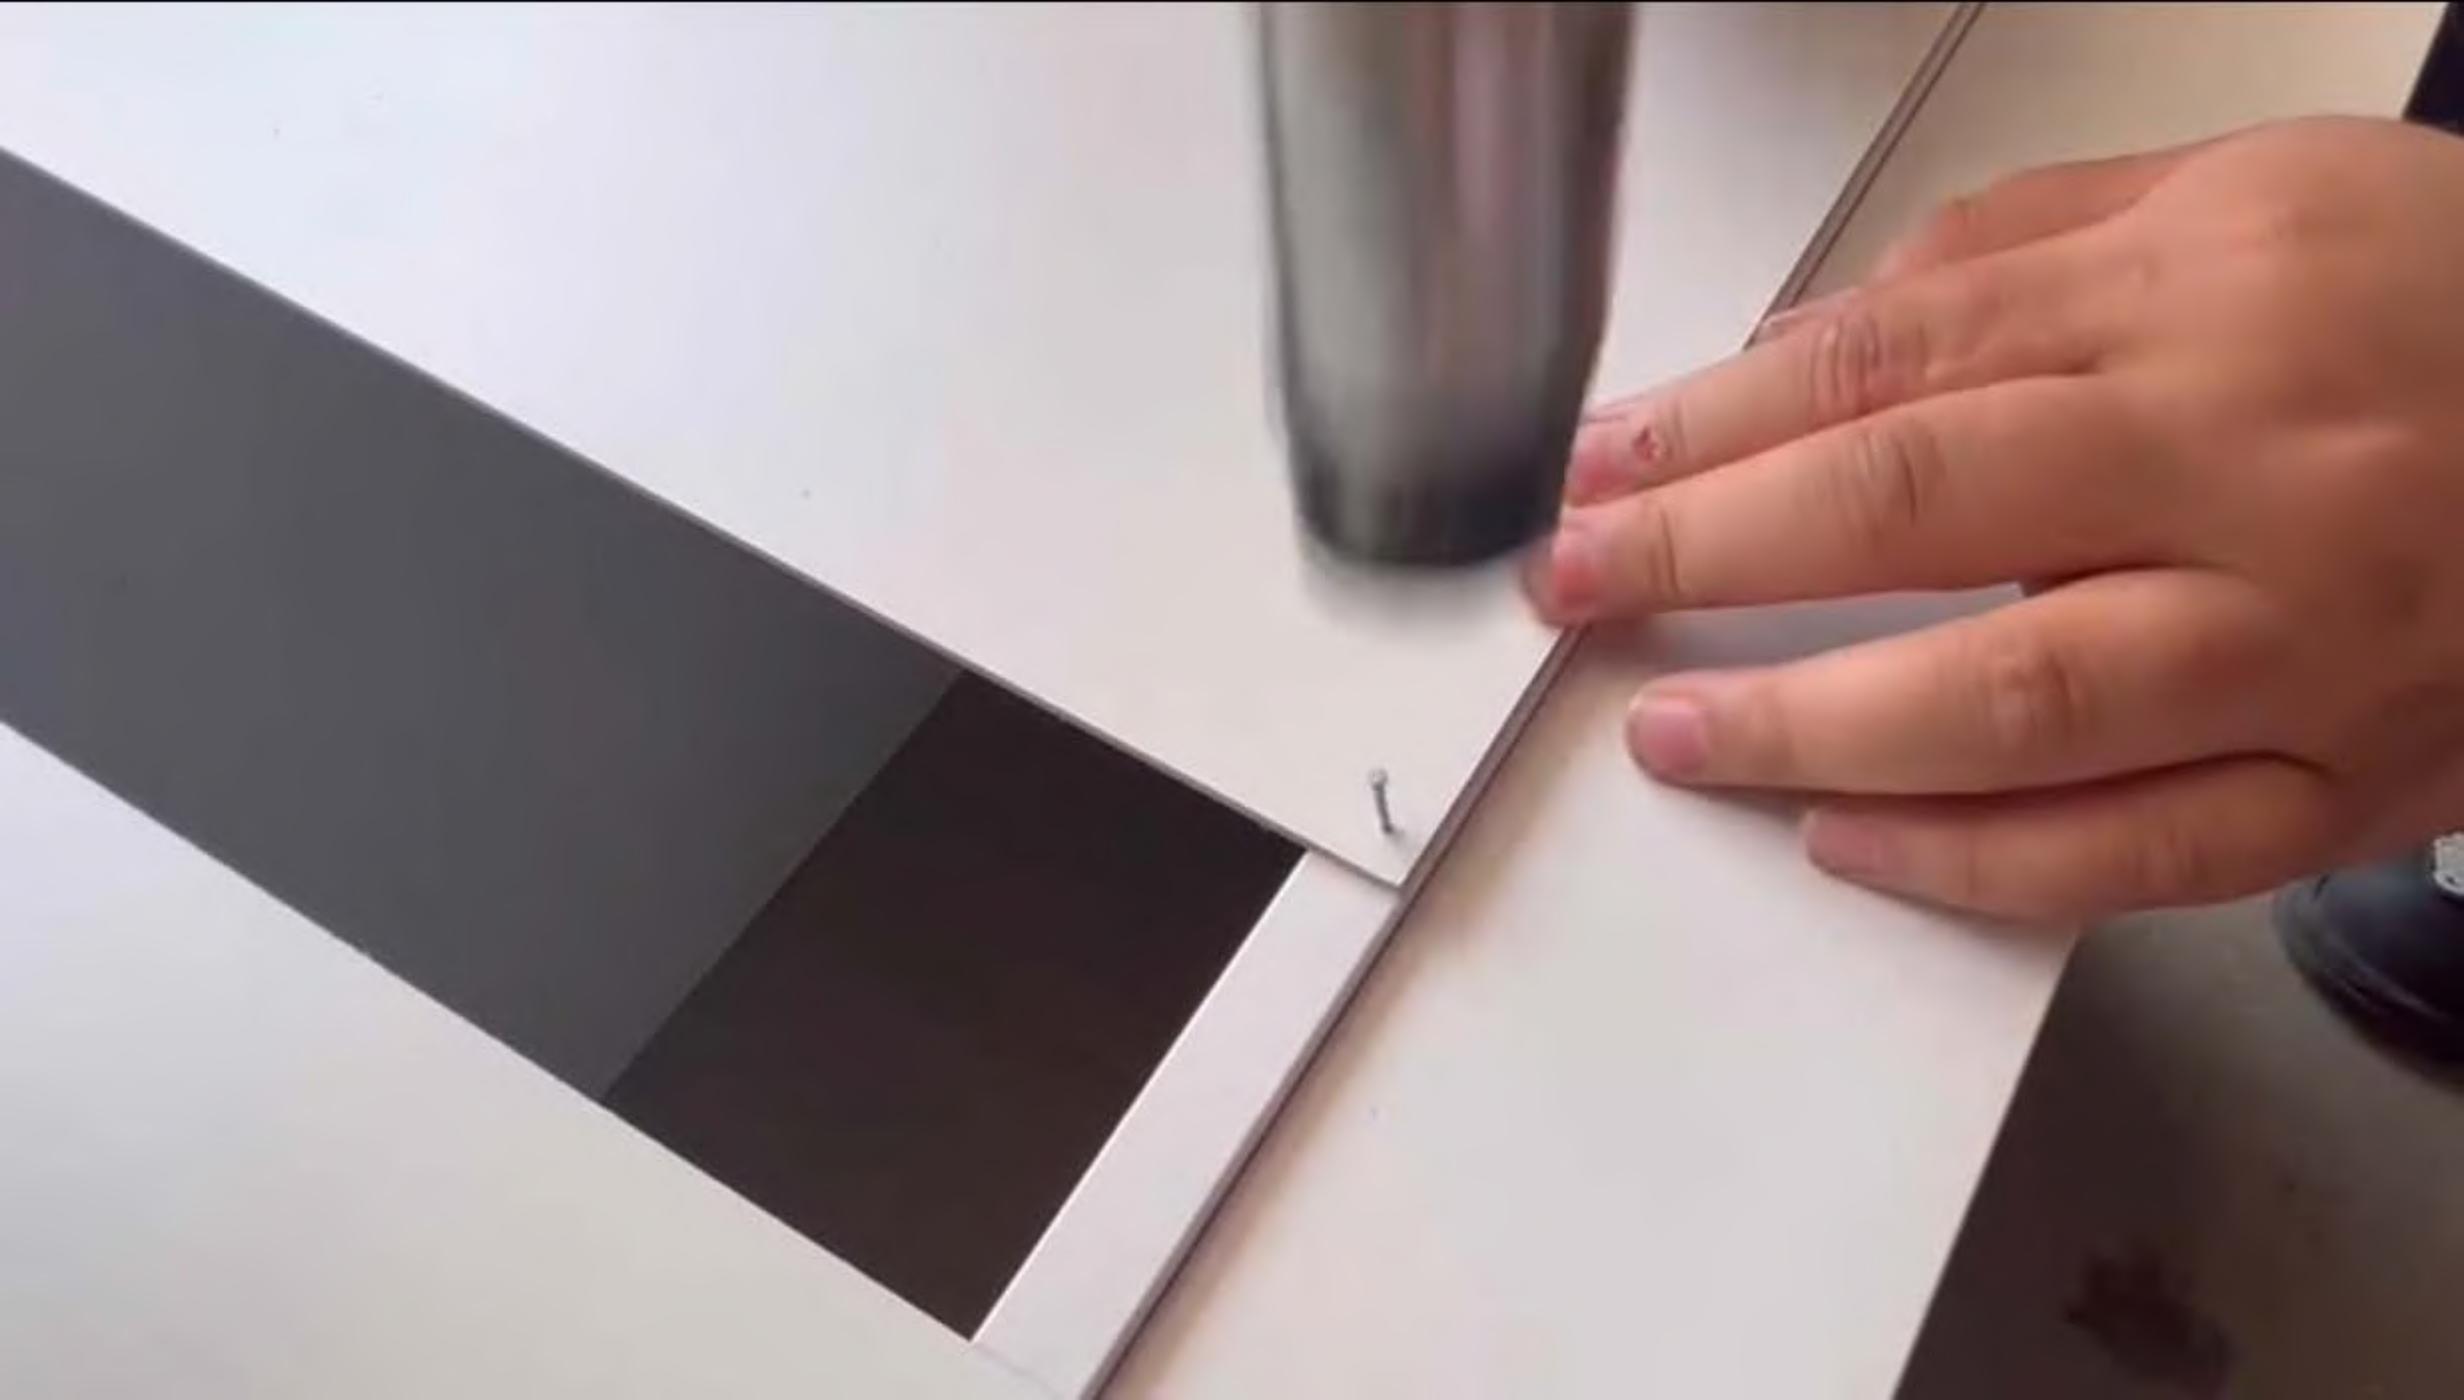

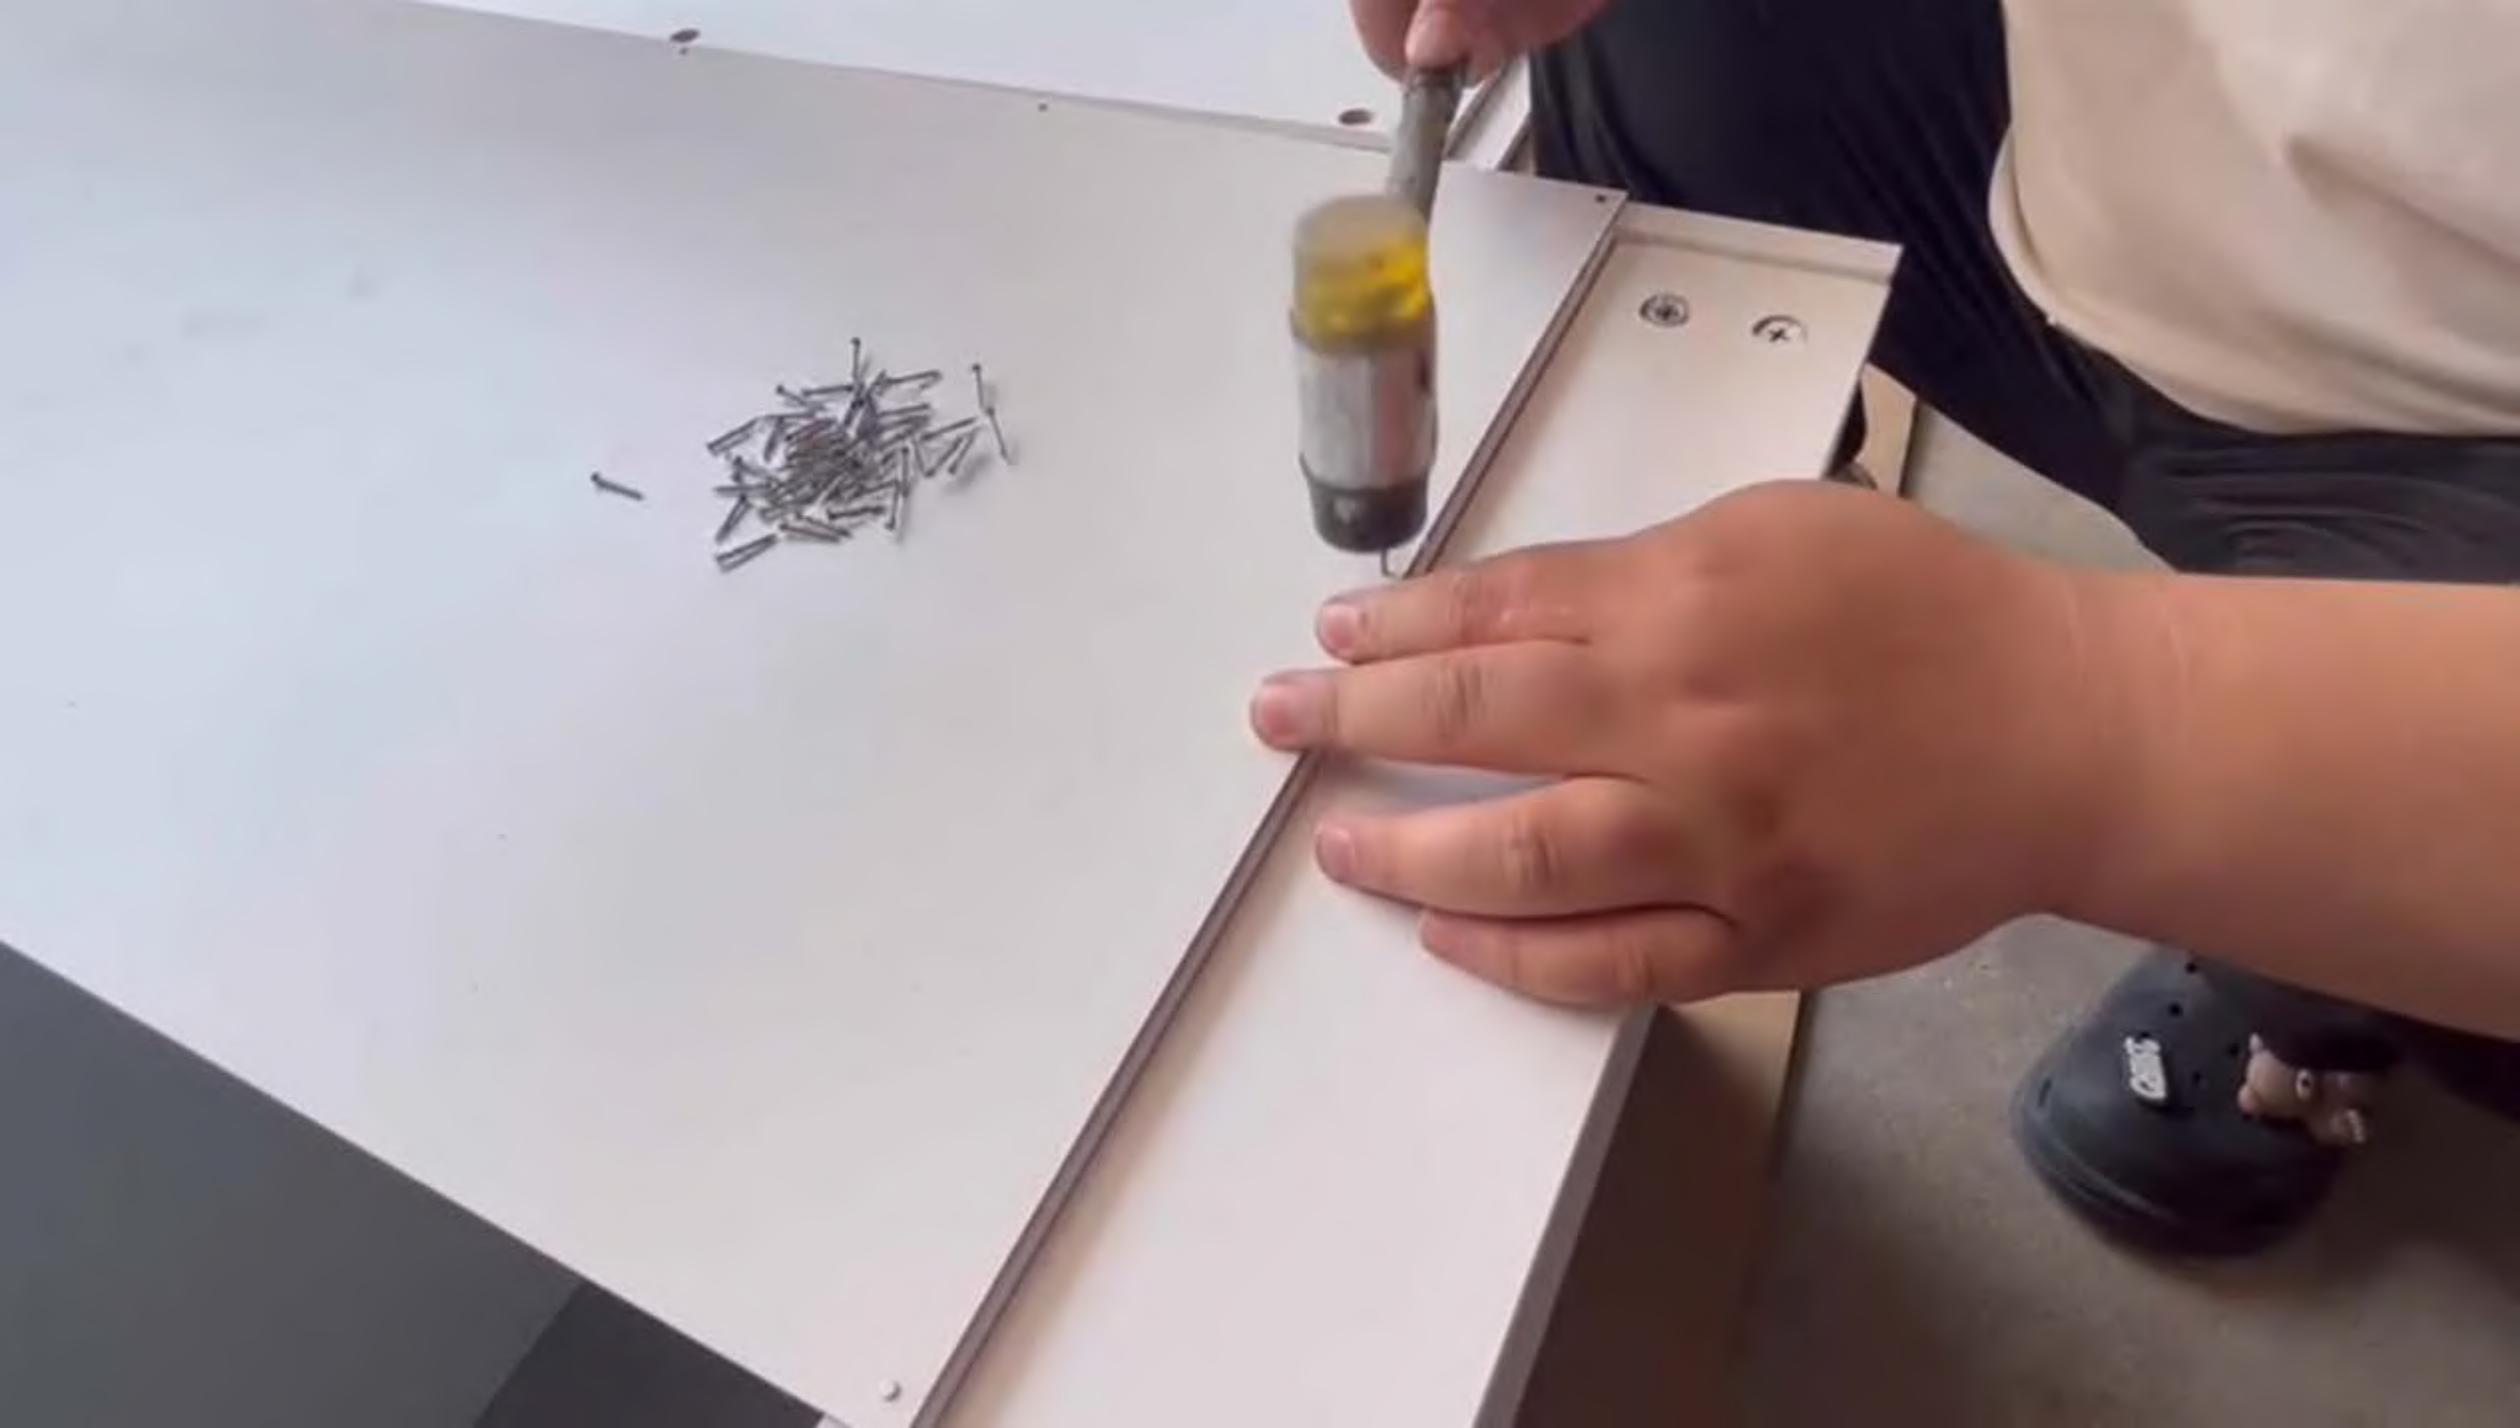





















Put the soft chain on the safety door panel



Install the hinges on the door panel

A person is kneeling on a light-colored wooden floor, working on a white rectangular board. They are using their hands to position a metal hinge on the board. The hinge is already partially attached to the board. To the right of the board, there is a clear plastic bag containing screws and other hardware. A blue power drill is also visible on the floor. The board has some faint markings, including 'ARFDD' and 'ARFOO'. The person is wearing dark pants and black Crocs with a brown bear design and the word 'CART' on the side. The floor is made of light-colored wood planks.

Install the hinge on the board



Turn the cabinet over and put it on its side



Turn the cabinet over and put it on its side



Install the door panel on the side panel (with hinge positioning)

孔)




Install the door panel on the side panel (with hinge positioning)



Install the door panel on the side panel/(with hinge positioning holes)



Install the door panel on the side panel (there are hinge positioning holes)

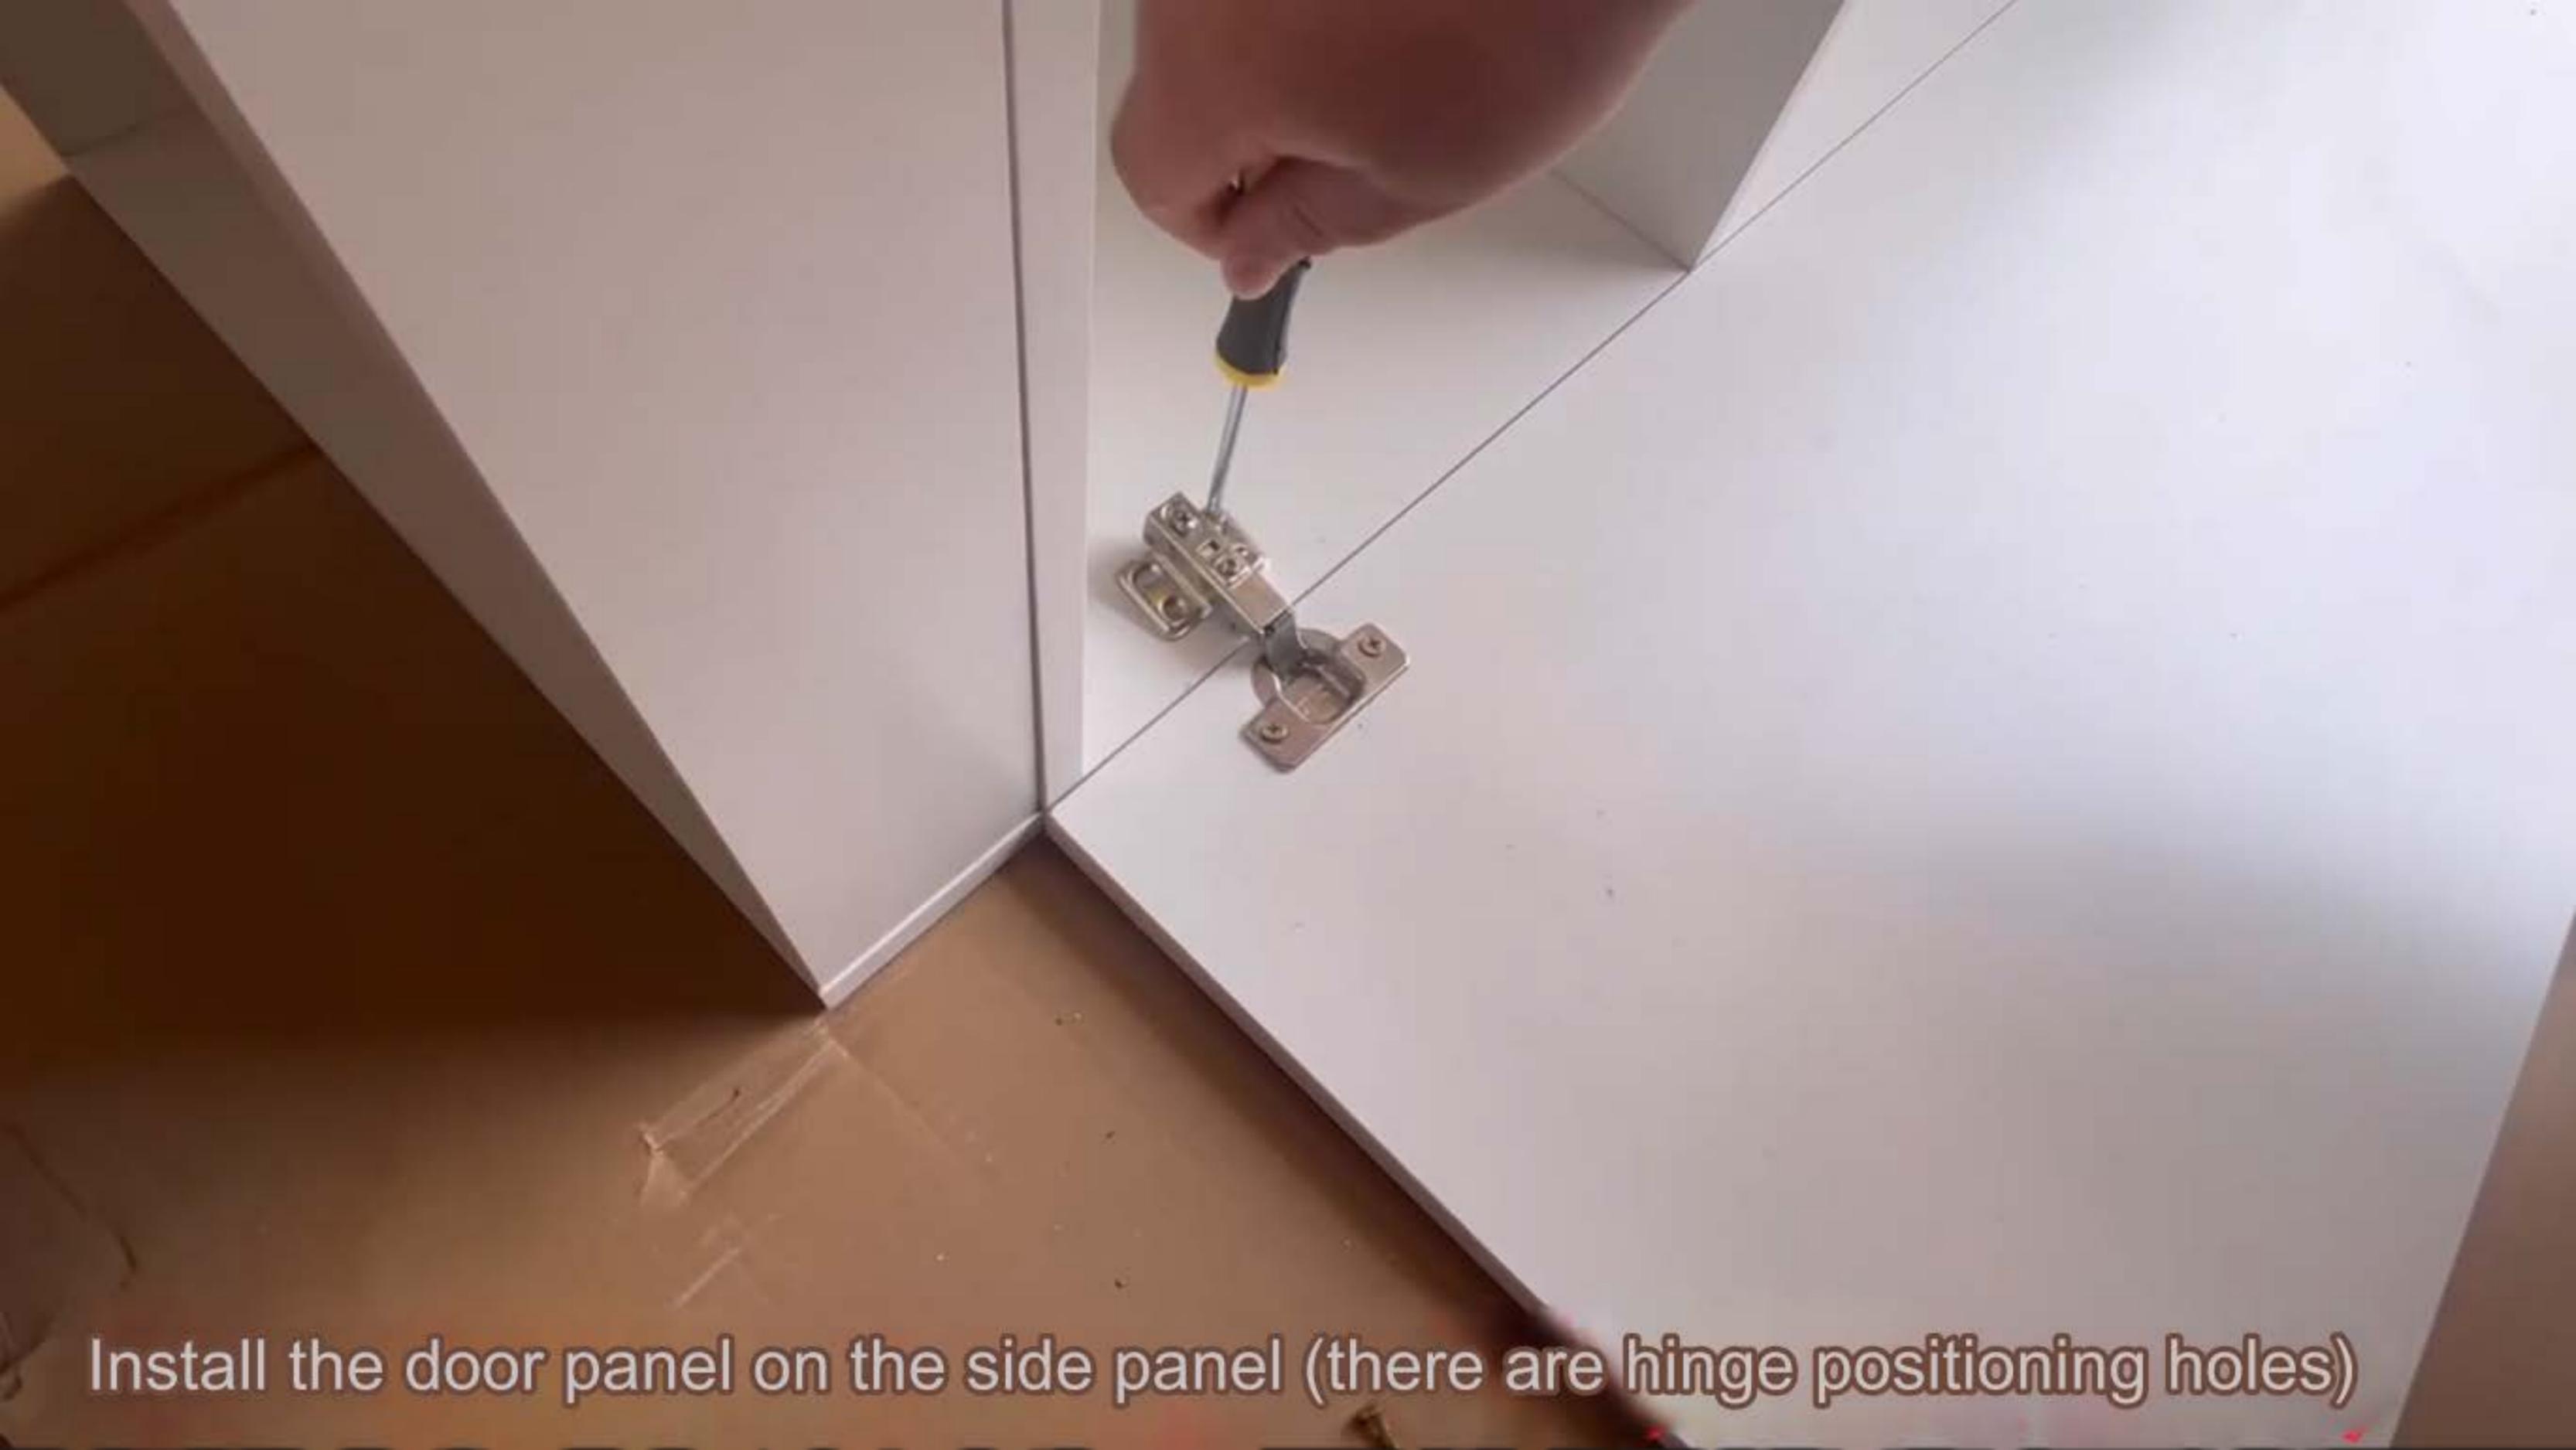

Install the door panel on the side panel (there are hinge positioning holes)



Install the door panel on the side panel (there are hinge positioning holes)



Go to the other side and continue installing the door panel.




Turn over to the other side and continue installing the door panel




Turn over to the other side and continue installing the door panel



Turn over to the other side and continue installing the door panel

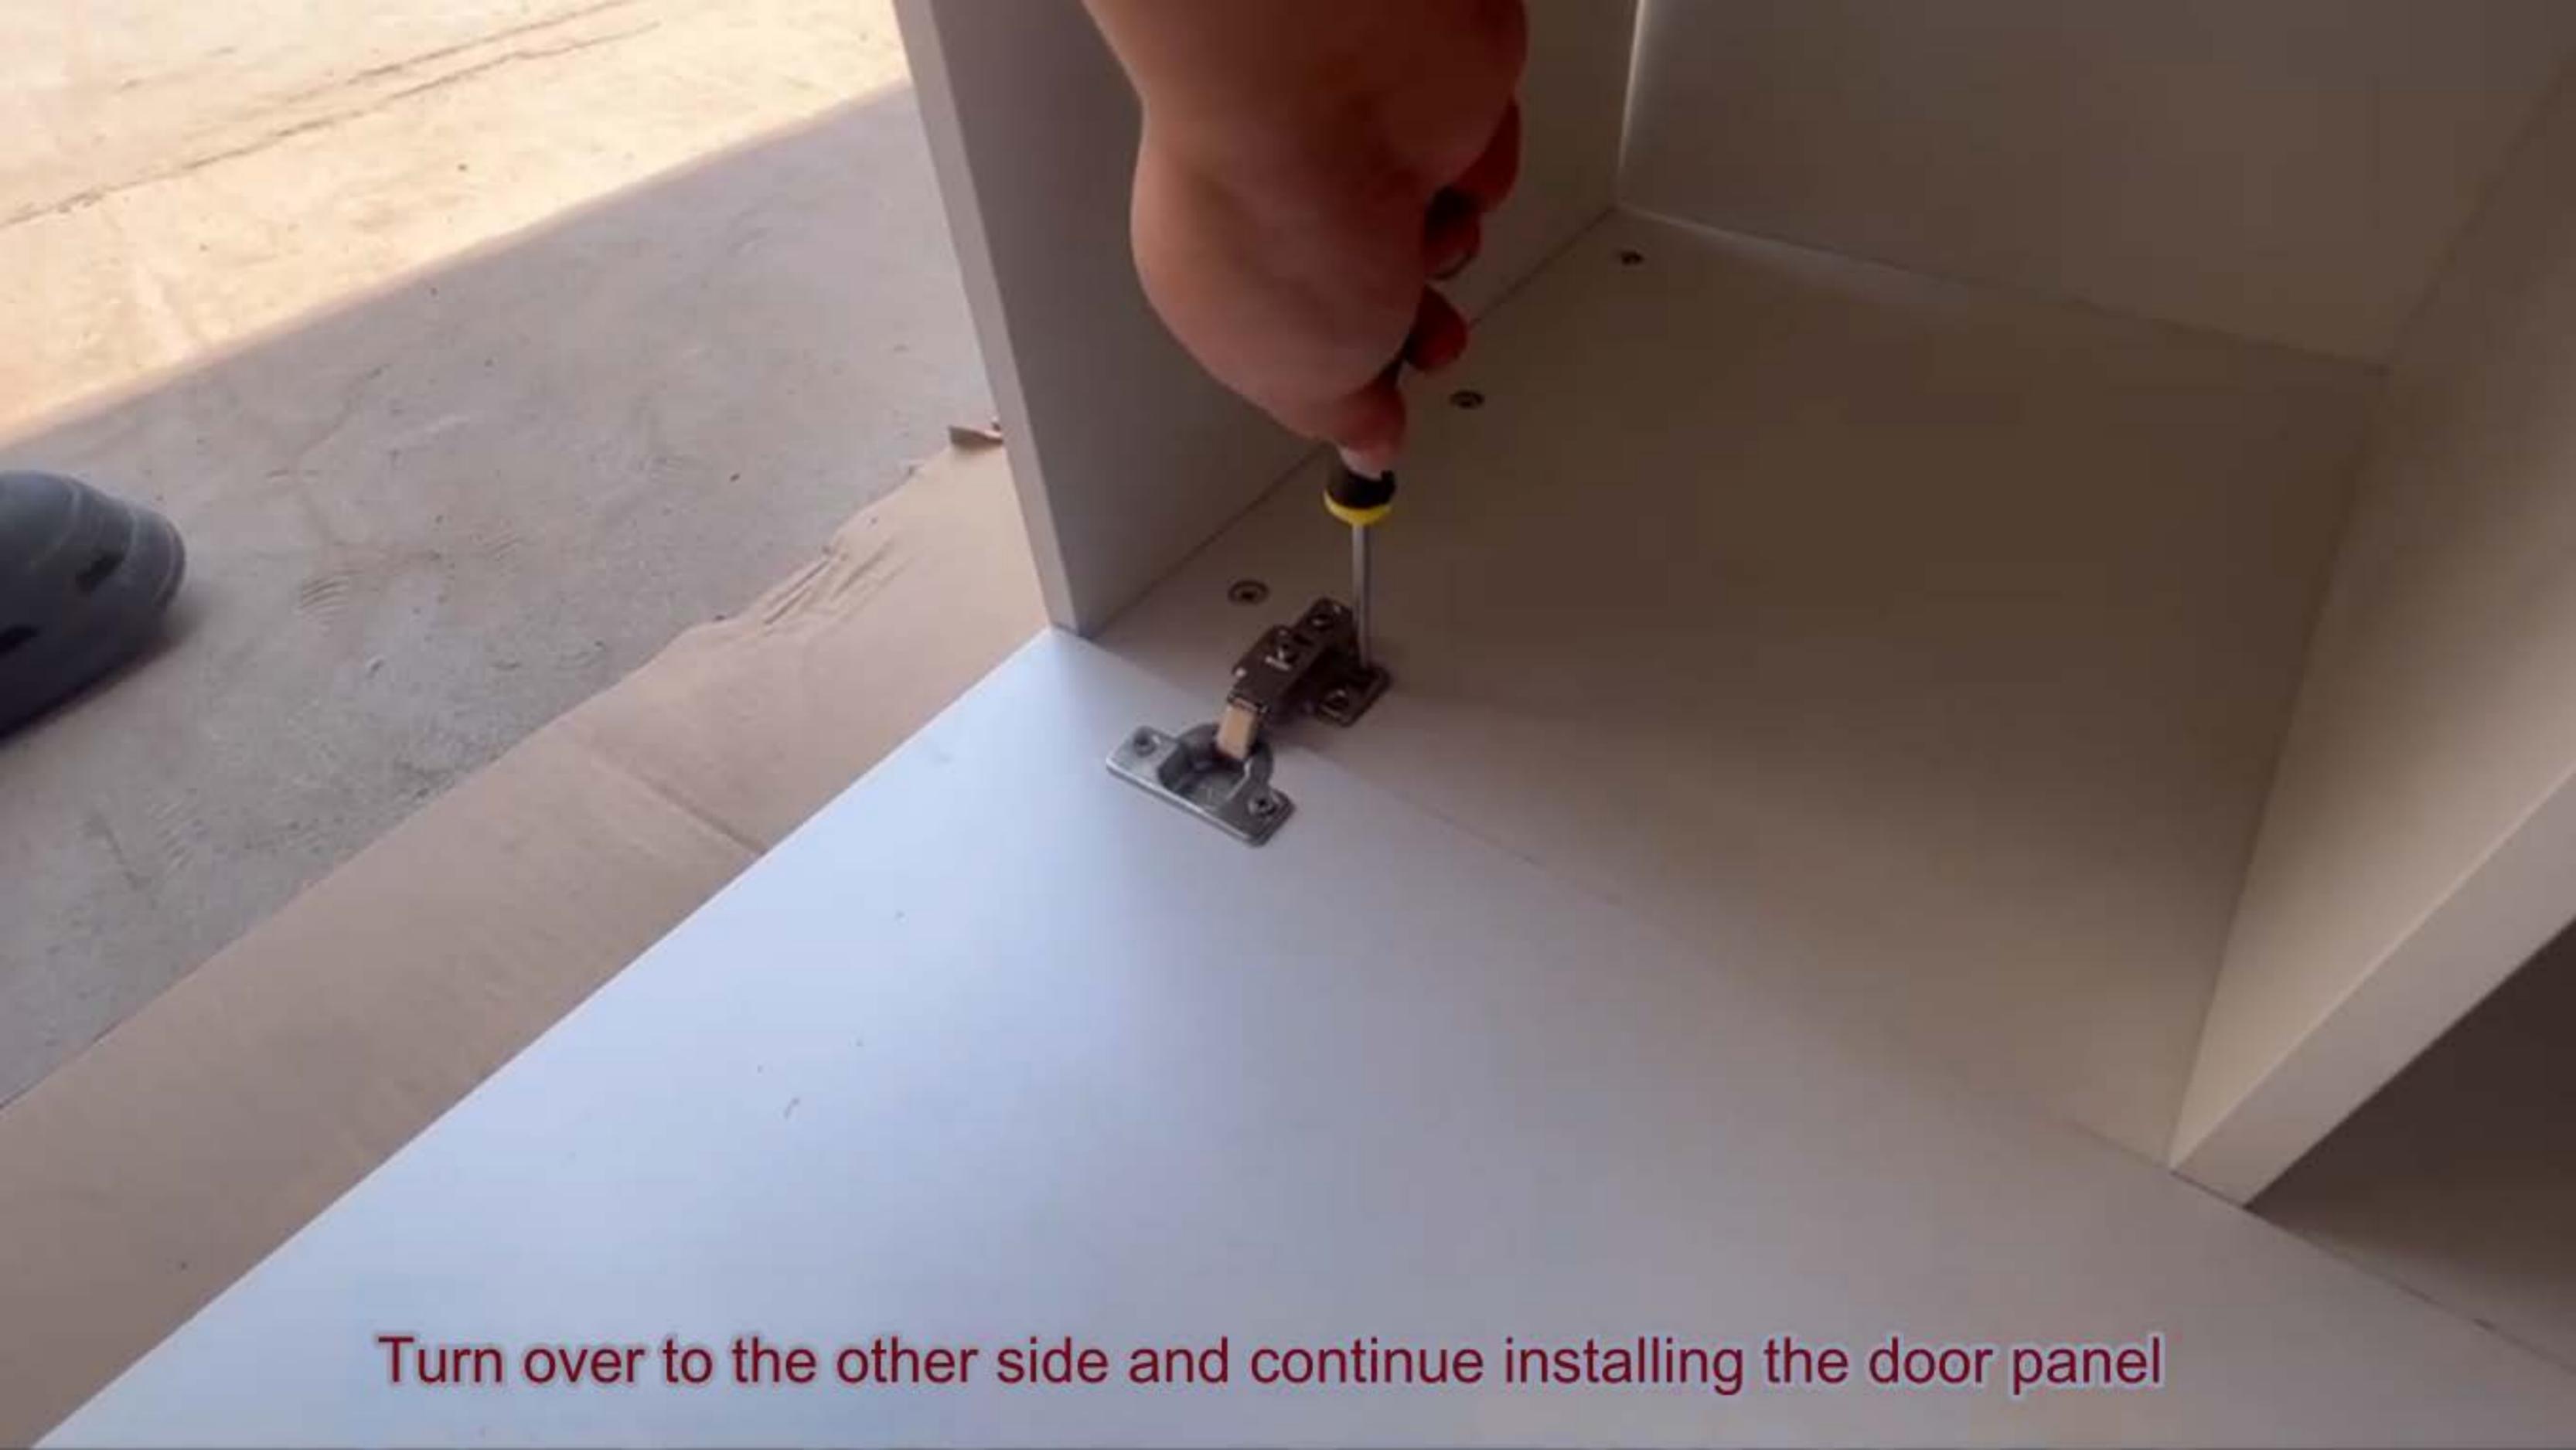

Turn over to the other side and continue installing the door panel

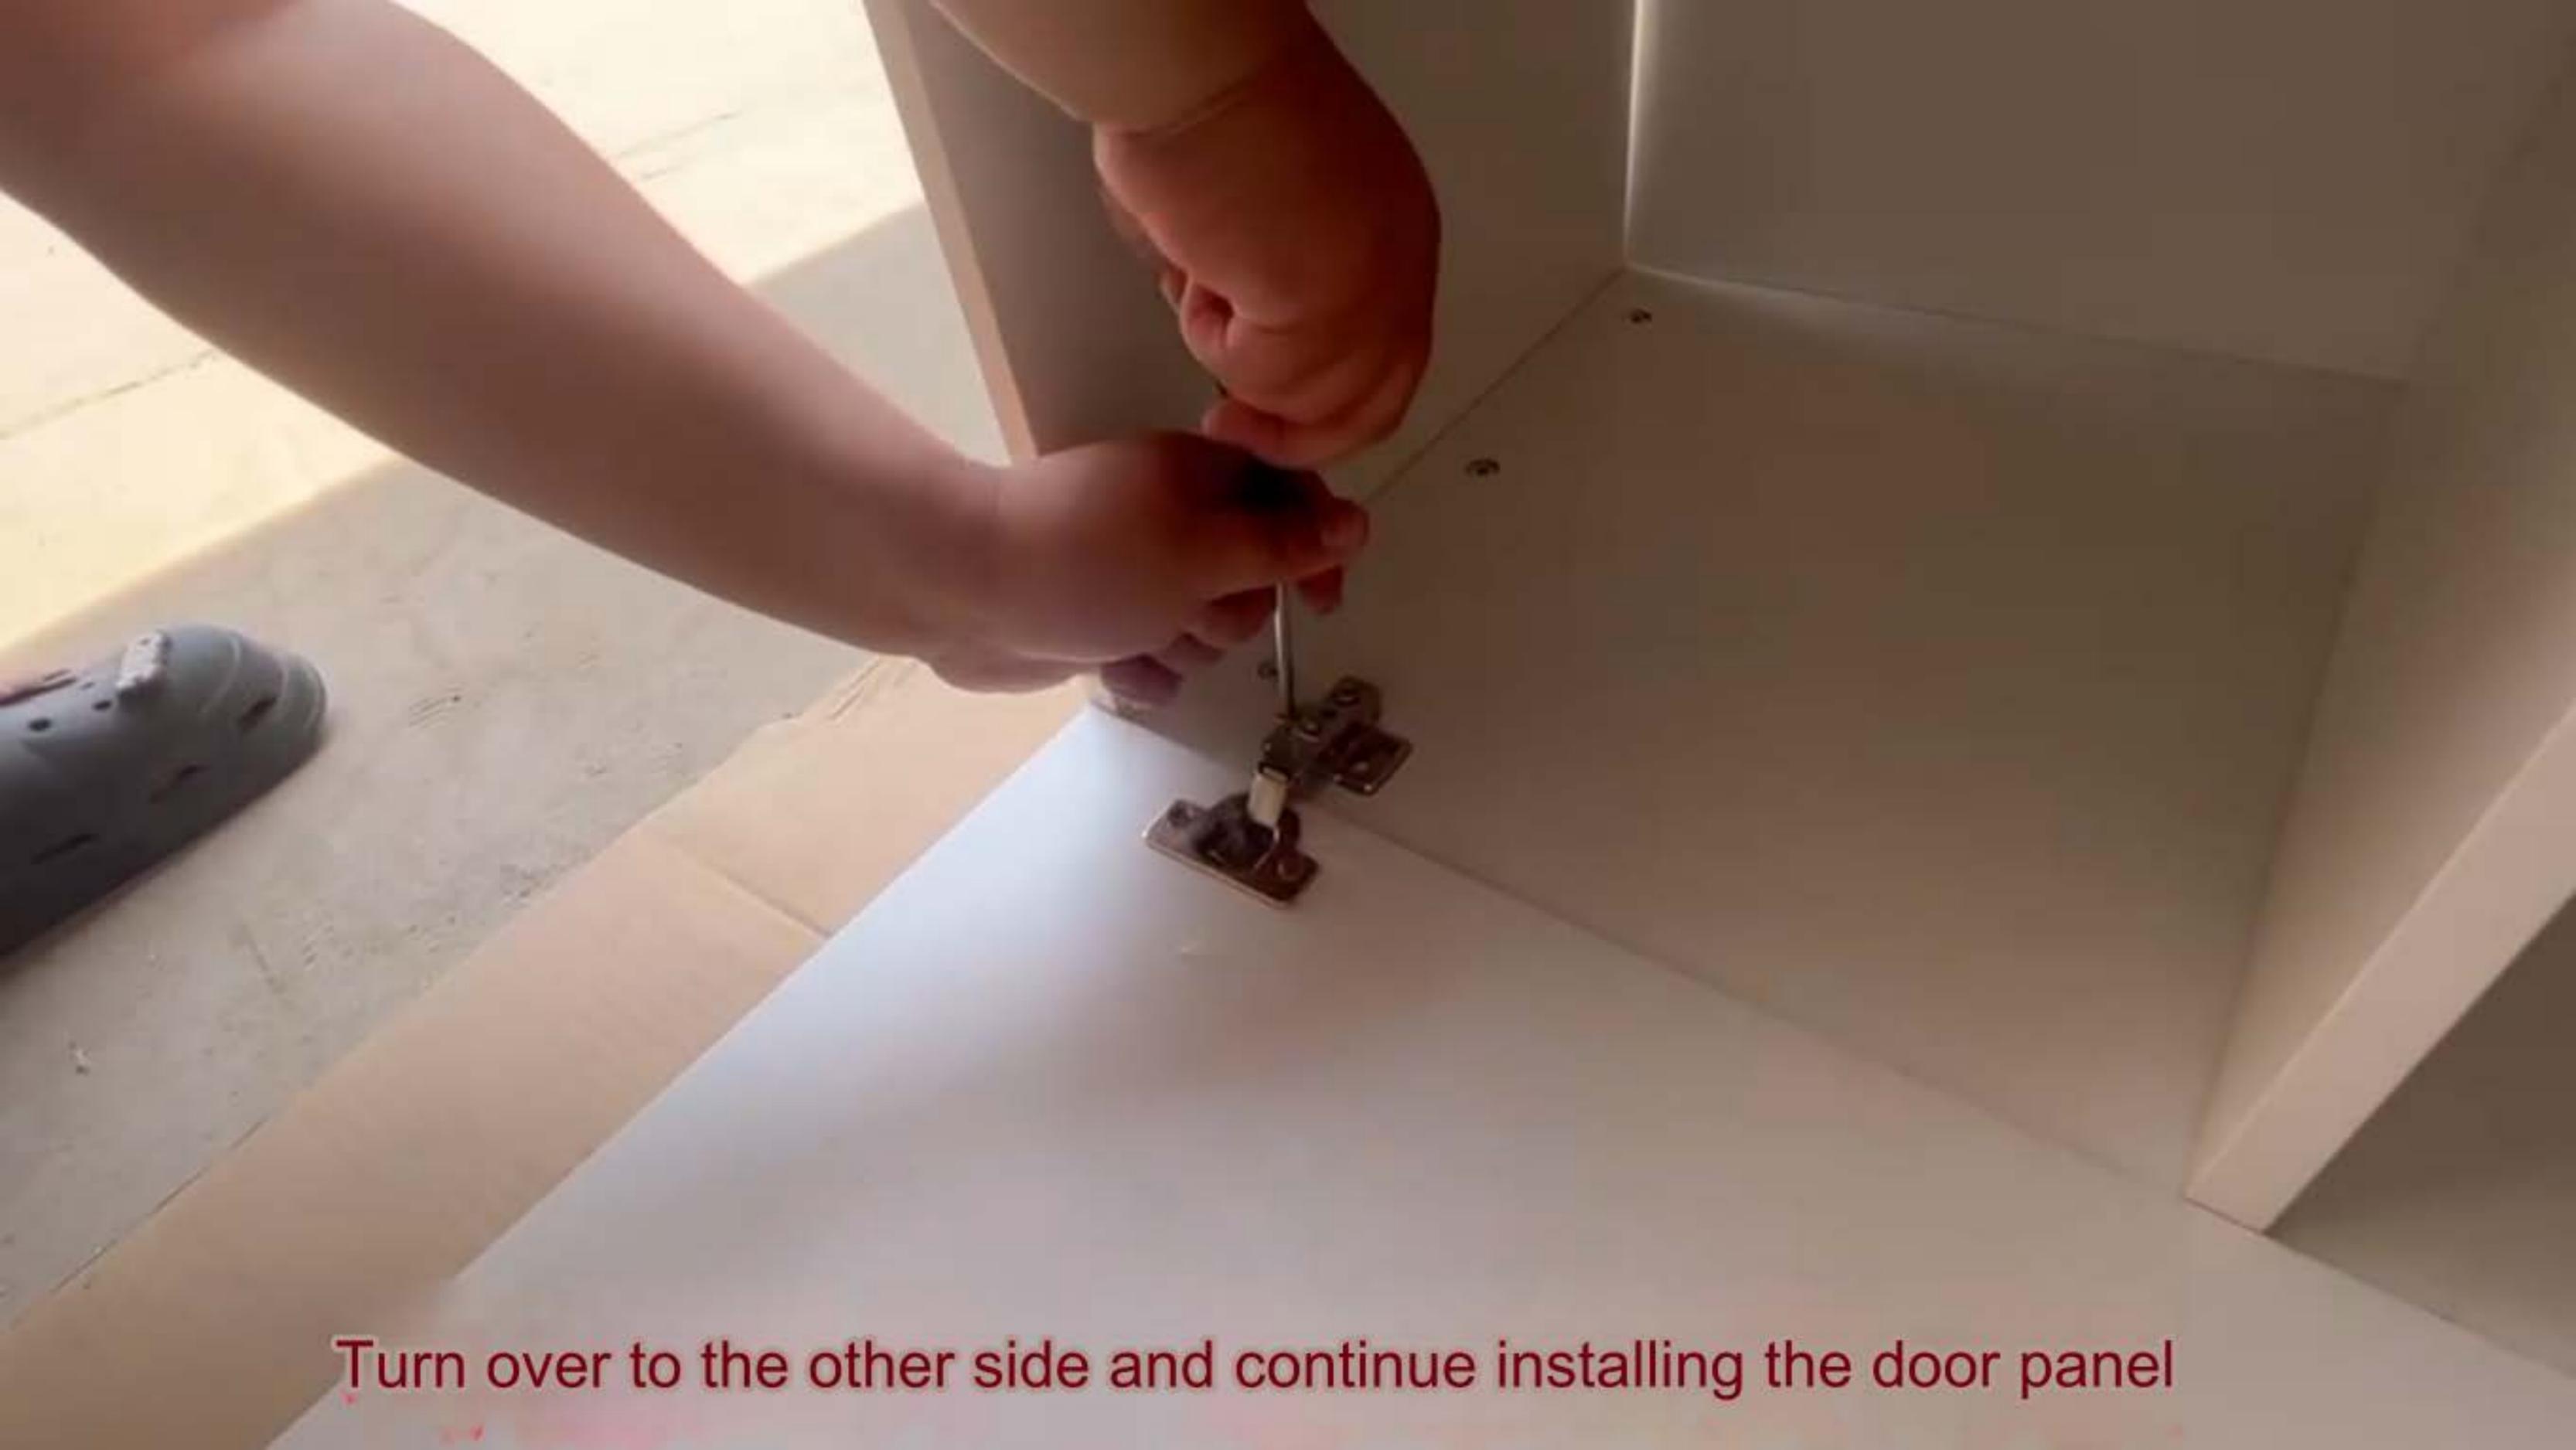

Turn over to the other side and continue installing the door panel

A white cabinet is being lifted by a person whose hands are visible at the bottom. The cabinet is tilted upwards. In the background, a red tricycle and a bicycle are parked on a concrete floor. A screwdriver lies on the floor to the left of the cabinet. The scene is set in a garage or workshop with wooden walls.

Raise the cabinet and install the handle



Raise the cabinet and install the handle



Raise the cabinet and install the handle



Lift up the cabinet and install handles



Quickly raise the cabinet and install the handle.



Install handles on cabinets



Raise the cabinet and install the handle



If the gap between the door panels is relatively large, you can adjust the gap through a screw in the middle of the hinge (turn clockwise or counterclockwise).



If the gap between the door panels is relatively large, you can adjust the gap through a screw in the middle of the hinge (turn clockwise or counterclockwise).



middle clothes pole





Left and right middle position
7cm from above

Tighten the screw directly



Left and right middle position

7cm from above

Tighten the screws



Place the clothes rail and install



Put the clothes rail on and the installation is complete